



Available finishes:- Black/Opal or White/Opal

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP65 IK10 0.3m 240V~50Hz 15W

These fittings are Class II and do not require an Earth

### Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply. Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature 0 ~ +25°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

### Important User Advice

Always switch off mains supply before installing/servicing. Do not use Megger or similar high voltage instruments. Due to the fact this luminaire contains electronic components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing. To prevent damage to the driver, do not mix with conventional magnetic ballasts on the same electrical circuit. At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation

### General Maintenance

General maintenance and cleaning should be performed at least quarterly. Clean product outer by washing down with soapy water (no abrasive cleaners) and greasing any nut/bolts where appropriate every 3 months. After any maintenance remember to check all seals undamaged and intact.

### Installation Procedure

Familiarize yourself with the installation.  
Safely isolate the mains supply.  
Unclip and remove the front cover to expose the 4 diffuser screws.  
Unscrew the 4 screws, retain and remove the diffuser.  
Using one of the 2 side cable entry points. Create a 20mm hole and fit the supplied cable gland.  
Ensure the fixing surface is flat and even. Fix base to the wall using adequate fixings with regards to the type of surface. Pass intended supply wires through the cable gland.  
Terminate wiring as per Fig. 1.  
Tighten the cable gland ensuring a water tight seal around the cable.  
**Please note:** For testing purposes a provision should be made in the circuit for disconnection of the unswitched live (i.e. key switch). Connect the Emergency battery.  
Select the colour required using the switch located just below the terminal block. Note: Never change the LED colour with the luminaire powered on as this can damage the luminaire.  
Make sure the base seal is in place and undamaged.  
Replace the diffuser secure using the the 4 retained screws. Clip the front cover over the fitting.  
Turn on the mains supply and test luminaire.  
This fitting requires a 24 Hour initial charge period prior to any emergency testing, please see overleaf for testing routine, write on the battery label in permanent ink the date of commissioning. All results must be recorded and left with the end user.  
The battery has a rated duration of at least 4 years but should be replaced if the duration of operation is less than 3 hours after a 24hr charge time with no interrupted supply.


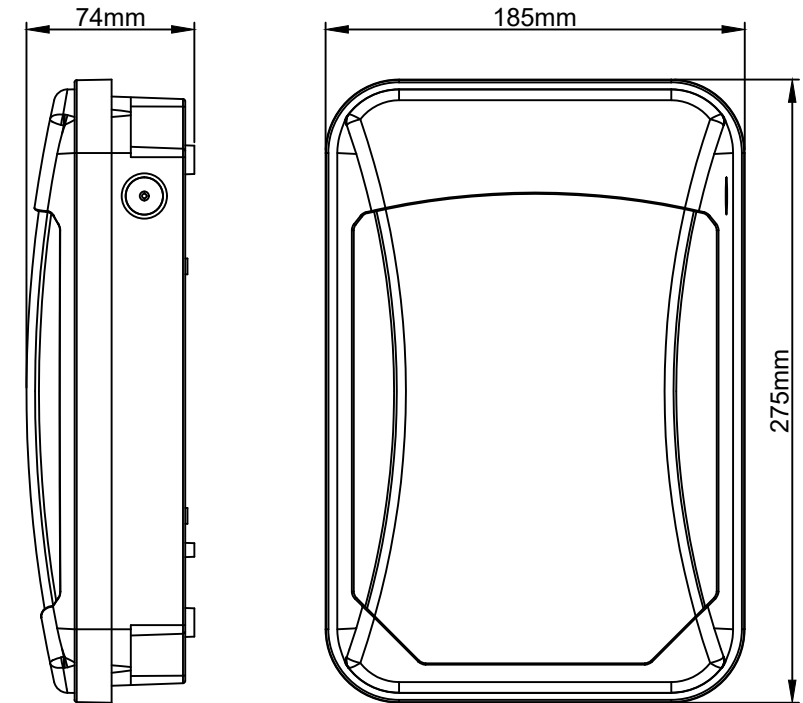


Fig.1

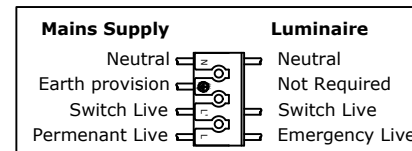

### LED Details

Wattage: 15W  
Colour: 3000K, 4000K and 6000K CCT  
Lumen Output:  
3000K - 1013 lumens  
4000K - 1143 lumens  
6000K - 1043 lumens  
CRI: Ra>83  
Non-Dimmable

**The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced**

*This product contains a light source of energy efficiency class F*

KSR Lighting Aftersales: 023 92 674343

E-mail: aftersales@ksrlighting.com





All tests must be undertaken at times of least risk and in accordance with EN 50172:2004 as indicated below:

**Daily:**

LED charge indicators shall be visually inspected for correct operation.

**Monthly:**

(in addition to the daily check) If automatic testing devices are used, the results of the short duration tests shall be recorded.

Test shall be carried out as follows:

1. Switch the luminaire over to emergency mode to operate from the batteries by simulating a failure of supply to the emergency circuit for a period sufficient to ensure correct luminaire operation.

**Note:** The period of simulation failure should be sufficient for the purpose of this clause whilst minimising damage to the system components e.g lamps. During this period, all luminaires shall be checked to ensure that they are present, clean and functioning correctly. At the end of this test period, the unswitched supply should be restored and any indicator lamp or device should be checked to ensure that it is showing that the supply has been restored.

**Annually:**

If automatic testing devices are used, the results of the short duration tests shall be recorded. For all other systems the monthly inspection shall be carried out and the following additional tests made:

1. Each luminaire shall be tested monthly as above but for its full duration in accordance with the manufacturer's information.
2. The unswitched supply for the luminaire should be restored and any charge indicator lamp or device should be checked to ensure that it shows the unswitched supply has been restored. The charging arrangements should be checked for proper functioning.
3. The date of the test and its results shall be recorded in the system logbook.

A copy of this report must accompany any emergency luminaire returned to KSR Lighting for any reason.



# KSR Lighting Self Test Emergency Install/Inspection/Test Record



Product Code:	Product Description:
Product Location:	
Commissioning Date:	Commissioned By:

Month	Test	Year:		Year:		Year:		Year:		Year:	
		Sign	Date	Sign	Date	Sign	Date	Sign	Date	Sign	Date
01	Function										
02	Function										
03	Function										
04	Function										
05	Function										
06	Duration										
07	Function										
08	Function										
09	Function										
10	Function										
11	Function										
12	Duration										