



Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP65 240V~50Hz 10.5W

These fittings are Class I and must be Earthed

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply. Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature 0 - +35°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always switch off mains supply before servicing. This luminaire is suitable for Outdoor use. KSR recommends a regular cleaning schedule is maintained to preserve the finish and light output of the product throughout its operating life. Do not use Megger or similar high voltage instruments. Due to the fact this luminaire contains electronic components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing. To prevent damage to the driver, do not mix with conventional magnetic ballasts on the same electrical circuit. At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation

Installation Procedure



Familiarize yourself with the luminaire/installation procedure and ensure the power is safely isolated before installing the luminaire.

Locate Area(s) suitable for installation. Loosen the side screws with a suitable screwdriver, take off the backplate and disconnect the plug connector as shown in Fig.1. Fix the backplate to the surface using the fixings provided, Push suitable cable through Grommet provided, being careful to make a small hole in grommet as to ensure a good seal between supply cable and grommet. Connect the mains 240V~50Hz supply into Live (L) Brown, Earth (⊕) and Neutral (N) Blue terminals on the terminal block. Plug the connector back together and refit the main body to the luminaire using the side screws loosened in the first stage. Fit optional shades by either the recess ridges (KSR71102) that locate on the fitting body (A.) or via the fixings provided (KSR71103) into Hole B. Turn on Power and Test Luminaire

Fitting output details. Sleek Single (Up or Down)		
KSR71100	Lumen output	
CCT	3000K	4000K
7.5W	650lm	730lm
CRI	91	90

Fitting output details. Sleek Twin (Up & Down)		
KSR71101	Total Lumen output	
CCT	3000K	4000K
10.5W	760lm	850lm
CRI	92	92

Available finishes :- Anthracite (KSR71102 & KSR71103), White, Rusty Brown & SOLID Brass (Sleek Shades Only)

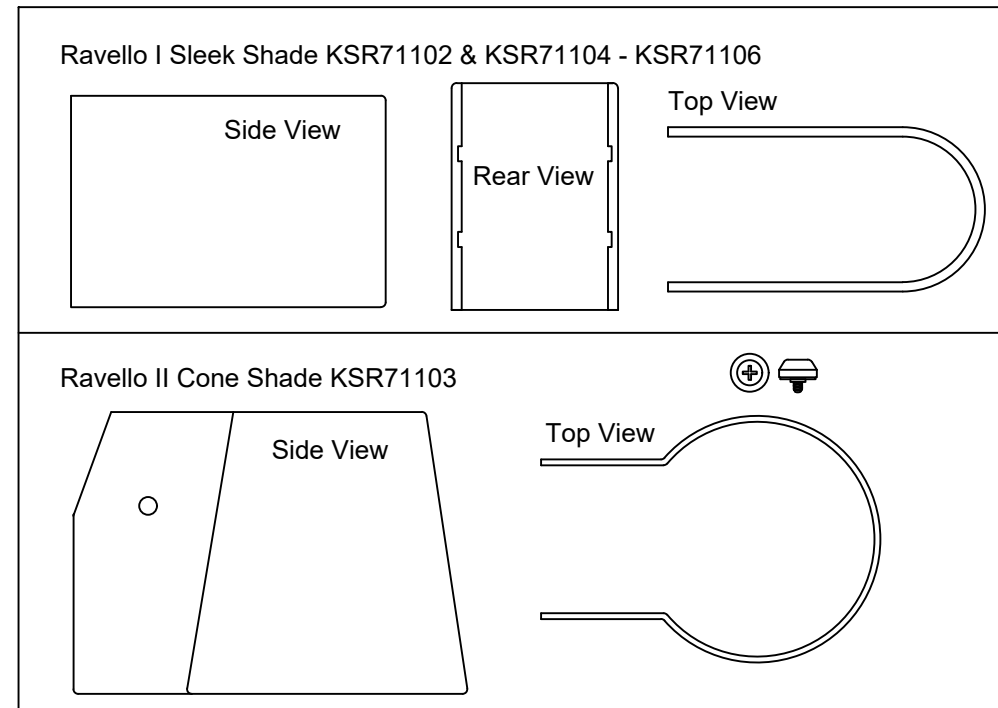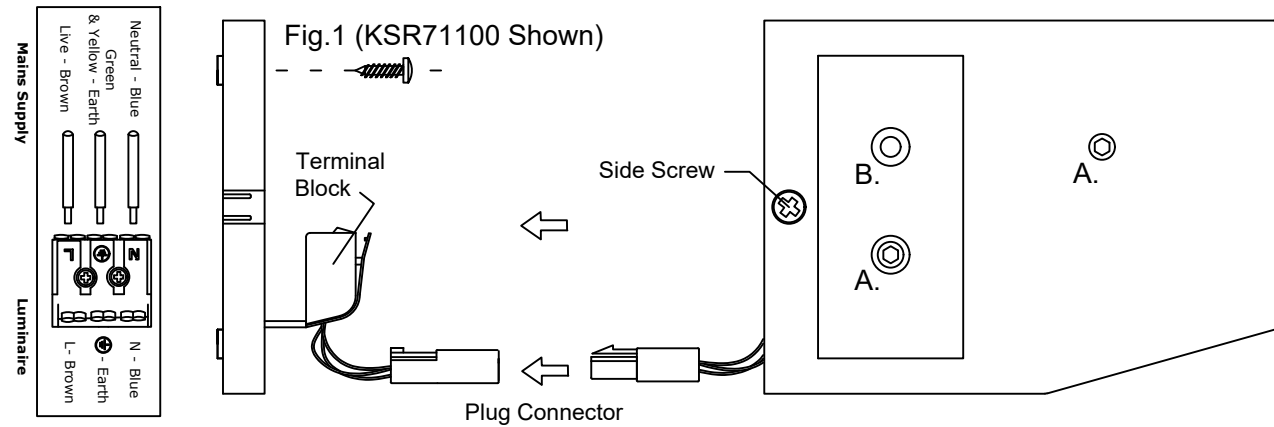

KSR Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com

This product contains a light source of energy efficiency class F, The LED light source and Control Gear in this product is Non-replaceable.