

Leon

Bollard Range

Bollards



Data Sheet

Product Information

The Leon Bollard Range is ideal for path lighting and feature lighting for residential applications. With its decorative design it is ideal for high end applications.

Supplied in an anthracite finish
Complete with a 2 year warranty.
Not suitable for high saline areas

Product Features

- 2 year warranty
- Class I
- IP54
- Supplied in 3000K as standard
- 190° emitting beam angle
- 2 Heights available
- Strong Cast Aluminium Body
- L70-40,000hrs



Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Protection Class
KSR1917	Leon 10w LED 250mm Bollard	10w	3000	662	84	I
KSR1918	Leon 10w LED 500mm Bollard	10w	3000	662	84	I

Nominal voltage	100~240VAC
Operating frequency	50/60Hz
Circuit Wattage	10.9w LED including losses
Circuit Current	TBC
Driver mA Rating	TBC
PFC	TBC
In Rush Current	TBC
Ambient temperature range	-10°c to +40°c
IP rating	54

Construction

Body: Cast Aluminium
Lens: Polycarbonate

Standards


BSEN60598-1:2021 Luminaires – Part 1: General requirements and tests

In Conformity with


LVD Low voltage directive 2014/35/EU
EMC Electromagnetic compatibility directive 2014/30/EU
ERP Energy related products directive 2019/2020/EU
RoHS Restriction of hazardous substances 2015/863/EU

Product Dimensions

KSR1917

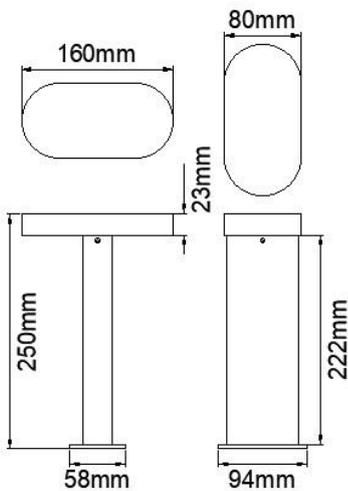

KSR1918

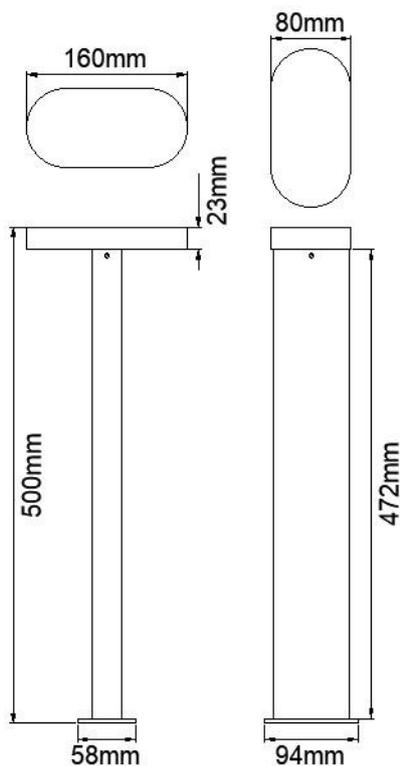

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.