

# Mika

## Pendant Range

LED Pendants



Data Sheet

### Product Information

The Mika range of pendant luminaires are perfect for counter/table lighting in commercial or domestic applications. With a range of colour options and wattages.

They come complete with a 2 year warranty for your peace of mind.



### Product Features

- 2 year warranty
- High efficiency
- IP20
- 9W or 24W 3000K LED
- CRI: Ra82
- Non-Dimmable
- 55° Beam angle
- 5 Colour options
- Fully integrated driver
- Lighting designers can download photometric data from our website
- L70 - 30,000 hours

# Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class 2021	Protection Class
KSR7270	Mika 9W 3000K LED Pendant Light White with White Shade	9	3000	780	82	F	I
KSR7271	Mika 9W 3000K LED Pendant Light White with Transparent Shade	9	3000	780	82	F	I
KSR7272	Mika 9W 3000K LED Pendant Light Black with Smoke Transparent Shade	9	3000	780	82	F	I
KSR7273	Mika 9W 3000K LED Pendant Light Black with Black/Gold Shade	9	3000	780	82	F	I
KSR7274	Mika 9W 3000K LED Pendant Light Aluminium with Transparent Shade	9	3000	780	82	F	I
KSR7275	Mika 24W 3000K LED Pendant Light White with White Shade	24	3000	2150	82	F	I
KSR7276	Mika 24W 3000K LED Pendant Light White with Transparent Shade	24	3000	2150	82	F	I
KSR7277	Mika 24W 3000K LED Pendant Light Black with Smoke Transparent Shade	24	3000	2150	82	F	I
KSR7278	Mika 24W 3000K LED Pendant Light Black with Black/Gold Shade	24	3000	2150	82	F	I
KSR7279	Mika 24W 3000K LED Pendant Light Aluminium with Transparent Shade	24	3000	2150	82	F	I
KSR7306	Mika Nu 9W 3000K LED Pendant Light Black	9	3000	780	82	F	I
KSR7307	Mika Nu 9W 3000K LED Pendant Light White	9	3000	780	82	F	I
KSR7308	Mika Nu 9W 3000K LED Pendant Light Aluminium	9	3000	780	82	F	I
KSR7309	Mika Nu 24W 3000K LED Pendant Light Black	24	3000	2150	82	F	I
KSR7310	Mika Nu 24W 3000K LED Pendant Light White	24	3000	2150	82	F	I
KSR7311	Mika Nu 24W 3000K LED Pendant Light Aluminium	24	3000	2150	82	F	I

<b>Nominal voltage</b>	220~240V
<b>Operating frequency</b>	50-60Hz
<b>Ambient temperature range</b>	0°C~+40°C
<b>Start time</b>	< 0.5 sec
<b>Beam angle</b>	55°
<b>IP rating</b>	20

## Construction

Body: Extruded Aluminium  
 Diffuser: Polycarbonate


# Standards

BSEN60598-1:2021      Luminaires – Part 1: General requirements and tests


## In Conformity with

LVD	Low voltage directive 2014/35/EU
EMC	Electromagnetic compatibility directive 2014/30/EU
ERP	Energy related products directive 2019/220/EC
RoHS	Restriction of hazardous substances 2015/863/EU


## Product Dimensions

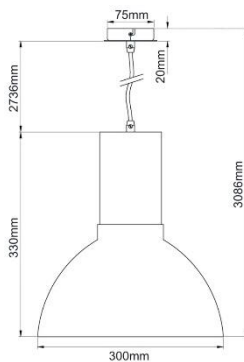


**KSR7270-7274**

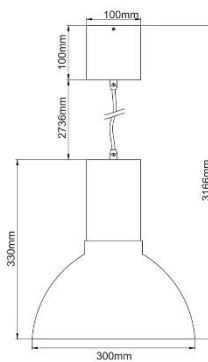

**KSR7275-7279**

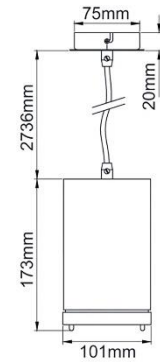

**KSR7306-7308**

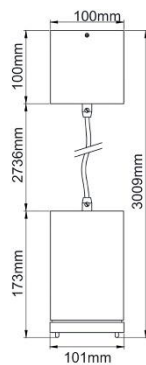

**KSR7309-7311**

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.