

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

Available Styles - Slot, Triangle, Round or Square
Available Finishes - White, Black or Brushed Brass

IP20 240V~50Hz 1.2W

These fittings are Class II and do not require an Earth

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply. Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation.

Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature 0 ~ +35°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice


Always switch off mains supply before servicing. This luminaire is suitable for indoor use only and should not be fitted to damp or wet surfaces such as freshly plastered or painted ceilings. Do not use Megger or similar high voltage instruments. Due to the fact this luminaire contains electronic components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing. To prevent damage to the driver, do not mix with conventional magnetic ballasts on the same electrical circuit. At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

Installation Procedure

KSR recommends that a sample hole is cut in some scrap material to familiarise yourself with the installation. Once you are completely satisfied: Locate the area's suitable to install these luminaires. Cut a 50mm round hole in the wall and ensure sufficient void without infringing on joists, water pipes or electrical cables etc. Connect the mains supply to primary side of the provided driver Fig.1 (Blue - Neutral, and Brown - Live). Refit and secure the terminal cover. Press springs together and place luminaire body into aperture. Plug the plug into the socket on the back of the magnetic LED front cover (Fig 2) and specify required colour temperature via the switch next to the socket, then snap the cover into place.




KSR7370-KSR7372	KSR7373-KSR7375	KSR7376-KSR7378	KSR7379-KSR7381
Cortina Slot	Cortina Triangle	Cortina Round	Cortina Square

CCT Switch



Step 2. Plug the plug from inside the fitting into the LED socket located on the rear of the front plate and specify the colour tempo via the switch next to the socket, snap the front plate into place ensuring it is located on the magnets correctly and securely.

Fig.1

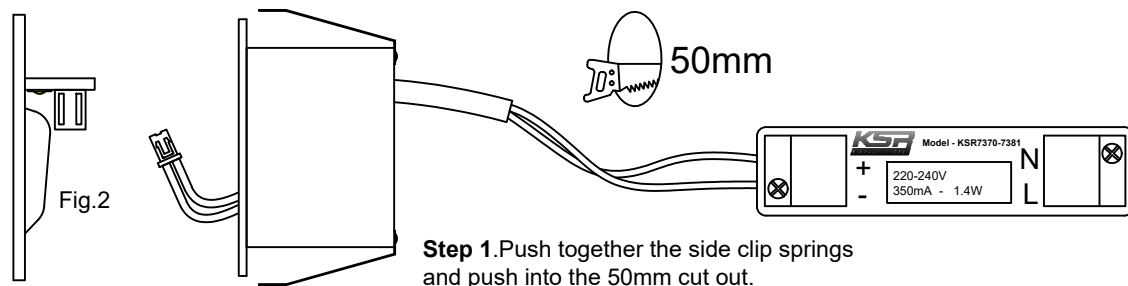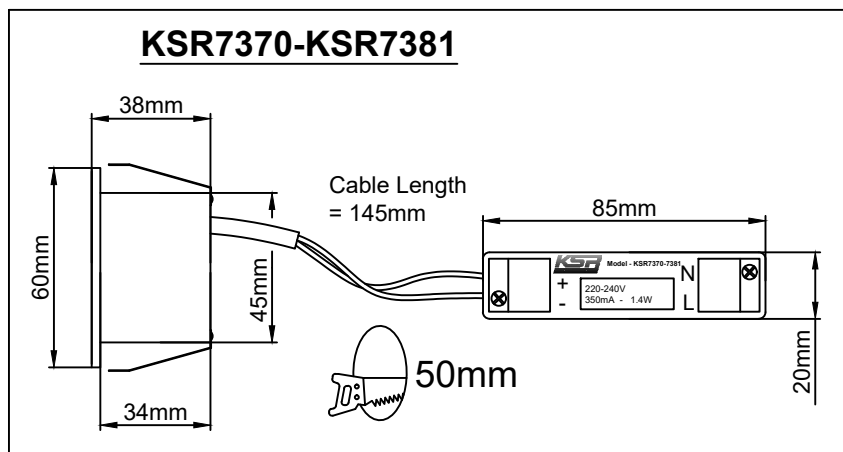

Step 1. Push together the side clip springs and push into the 50mm cut out.



*This product contains a light source of energy efficiency class F
The LED light source and Control Gear in this product can be replaced by a professional.*