

# Villas Mini

*Exterior Recessed Lighting*



Data Sheet

## Product Information

The Villas Mini LED recessed ground/wall lights are ideal for perimeter marker lighting.

Comes with a 2 year warranty for your peace of mind.

## Product Features

- 2 year warranty
- Class I
- IP65
- 3W 3000K or 4000K LED
- CRI: Ra80
- Non dimmable Integral driver
- Can be wall or ground recessed
- Available in 1 way, 2 way, 3 way or 4 versions
- Available in Black or Stainless Steel Finishes
- L70 – 25,000hrs




KSR1378/82



KSR1379/83



KSR1380/84

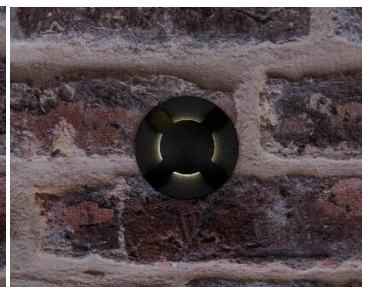

KSR1381/85

# Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Energy Efficiency Class	Protection Class
KSR1370	Villas Mini 3W 3000K LED One Way Ground/Wall Light Stainless Steel Wall Light	3	3000	G	I
KSR1371	Villas Mini 3W 3000K LED Two Way Ground/Wall Light Stainless Steel Wall Light	3	3000	G	I
KSR1372	Villas Mini 3W 3000K LED Three Way Ground/Wall Light Stainless Steel Wall Light	3	3000	G	I
KSR1373	Villas Mini 3W 3000K LED Four Way Ground/Wall Light Stainless Steel Wall Light	3	3000	G	I
KSR1374	Villas Mini 3W 4000K LED One Way Ground/Wall Light Stainless Steel Wall Light	3	4000	G	I
KSR1375	Villas Mini 3W 4000K LED Two Way Ground/Wall Light Stainless Steel Wall Light	3	4000	G	I
KSR1376	Villas Mini 3W 4000K LED Three Way Ground/Wall Light Stainless Steel Wall Light	3	4000	G	I
KSR1377	Villas Mini 3W 4000K LED Four Way Ground/Wall Light Stainless Steel Wall Light	3	4000	G	I
KSR1378	Villas Mini 3W 3000K LED One Way Ground/Wall Light Black Wall Light	3	3000	G	I
KSR1379	Villas Mini 3W 3000K LED Two Way Ground/Wall Light Black Wall Light	3	3000	G	I
KSR1380	Villas Mini 3W 3000K LED Three Way Ground/Wall Light Black Wall Light	3	3000	G	I
KSR1381	Villas Mini 3W 3000K LED Four Way Ground/Wall Light Black Wall Light	3	3000	G	I
KSR1382	Villas Mini 3W 4000K LED One Way Ground/Wall Light Black Wall Light	3	4000	G	I
KSR1383	Villas Mini 3W 4000K LED Two Way Ground/Wall Light Black Wall Light	3	4000	G	I
KSR1384	Villas Mini 3W 4000K LED Three Way Ground/Wall Light Black Wall Light	3	4000	G	I
KSR1385	Villas Mini 3W 4000K LED Four Way Ground/Wall Light Black Wall Light	3	4000	G	I

<b>Nominal voltage</b>	220~240VAC
<b>Operating frequency</b>	50-60Hz
<b>Ambient temperature range</b>	-20°C~+40°C
<b>Start time</b>	< 0.5 sec
<b>IP rating</b>	65

## Construction

Body: 304 Stainless Steel (KSR1370-77) and Cast Aluminium (KSR1378-1385)  
Lens: Glass

## Standards



BSEN60598-1:2021 Luminaires – Part 1: General requirements and tests

## In Conformity with

LVD Low voltage directive 2014/35/EU  
EMC Electromagnetic compatibility directive 2014/30/EU  
ERP Energy related products directive 2019/2020/EU  
RoHS Restriction of hazardous substances 2015/863/EU



# Product Dimensions

56-61mm

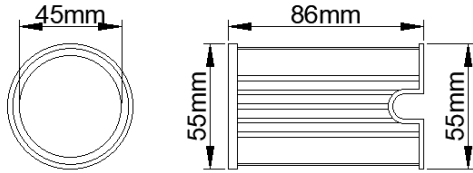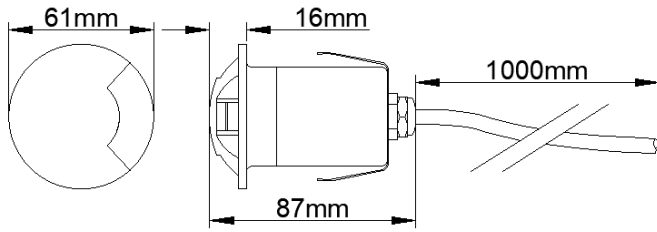



**KSR1370, KSR1374, KSR1378 & KSR1382**

56-61mm

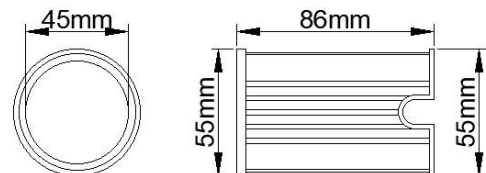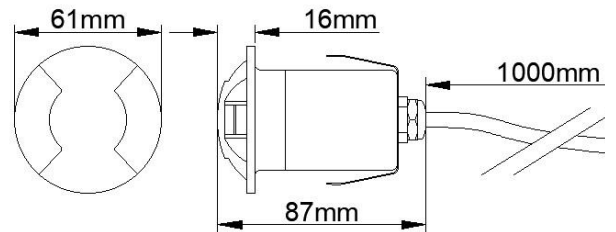



**KSR1371, KSR1375, KSR1379 & KSR1383**

56-61mm

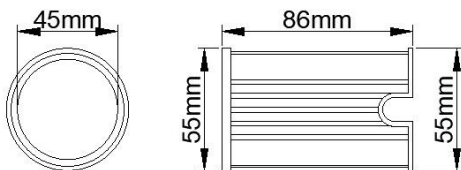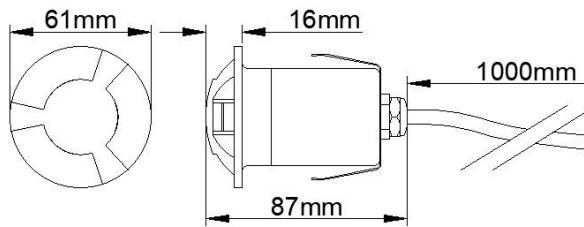

**KSR1372, KSR1376, KSR1380 & KSR1384**

56-61mm

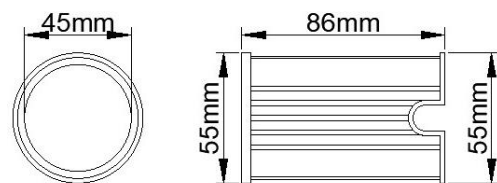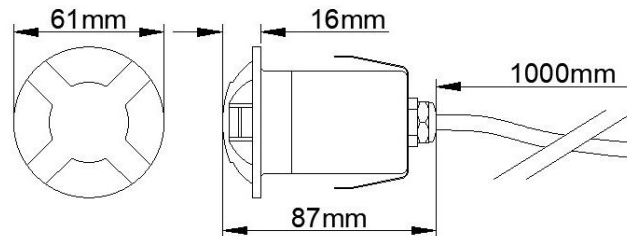

**KSR1373, KSR1377, KSR1381 & KSR1385**

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.