



Available finish:- Black Only

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP54 240V~50Hz GU10 7W Max LED Only

These fittings are Class II and do not require an Earth

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply. Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature 0 ~ +35°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice




Always switch off mains supply before servicing, fitting or replacing lamps. Always check the lamp is correct for the application, including its voltage and wattage. Ensure the lamp is correctly located in the lampholder. To prevent damage to the luminaire, do not mix with conventional magnetic ballasts on the same electrical circuit. At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

General Maintenance

General maintenance and cleaning should be performed at least quarterly. Clean product outer by washing down with soapy water (no abrasive cleaners) and greasing any nut/bolts where appropriate every 3 months. After any maintenance or lamp replacement, remember to check all seals undamaged and intact.

Installation Procedure

Ensure mains supply is turned off. Locate desired luminaire position. Remove back / fixing plate by removing the two top screws, secure the base in position on an even and stable background using suitable fixings, ensuring it is fitted with the mains connections facing down. Connect supply leads with terminal block: Brown (L), Blue (N) Fig.1. Fit the lamp / s and re-fit the cover, re-fix using the top screws, Do not over tighten. Turn on mains supply and test luminaire.

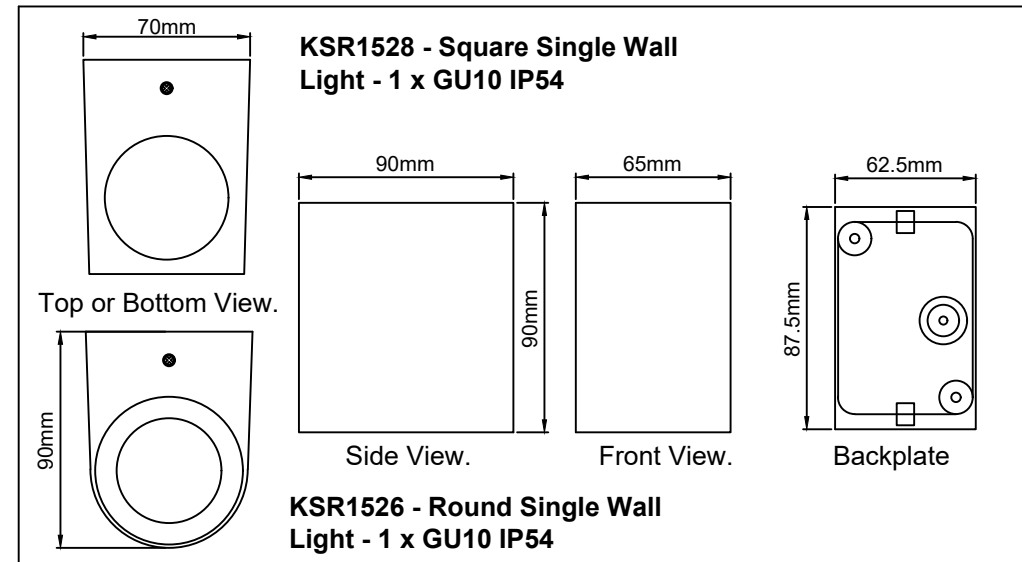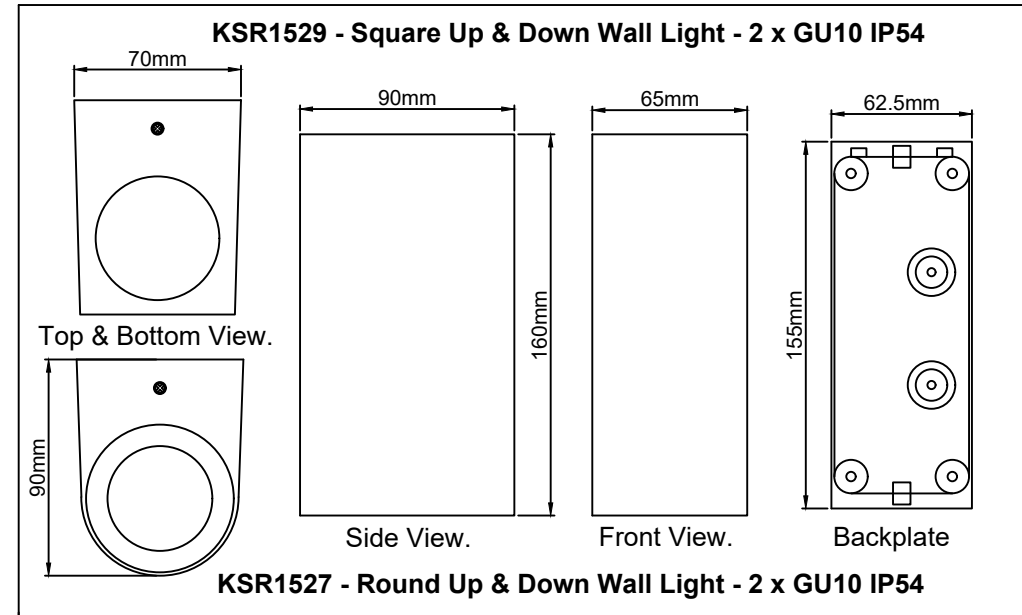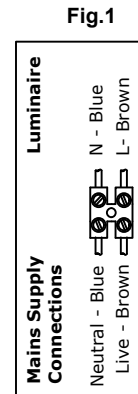

Lamp Details	Lamp Cap: GU10 Max Wattage: 7W Max LED Only	
KSR1526 - Norcia II Round Single Wall Light - 1 x GU10 IP54		
KSR1527 - Norcia II Round Up & Down Wall Light - 2 x GU10 IP54		
KSR1528 - Norcia II Square Single Wall Light - 1 x GU10 IP54		
KSR1529 - Norcia II Square Up & Down Wall Light - 2 x GU10 IP54		



KSR Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com