



Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

Available finishes: Black (KSR7282 Only) or White

IP20 240V~50Hz 2x8W or 2x12W

These fittings are Class I and are required to be Earthed

**Important Information**

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply. Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.



**Important User Advice**

Always safely isolate the mains supply before installing. Never fix the luminaires to a wet or freshly plastered wall. Do not use Megger or similar high voltage instruments. Due to the fact this product contains electronic components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing. To prevent damage to the driver, do not mix with conventional magnetic ballasts on the same electrical circuit. Please note: These luminaires are non-dimmable. At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation


**Installation Procedure**

Remove the fixing bracket by removing the center machine hex screw, retain for reinstall and loosening the 2 outer hex machine screws. Using the fixing plate as a template fix the fixing plate to the wall using suitable fixings for the substrate. Terminate the mains wiring as per Fig. 1. Refit the body to the fixing bracket and secure using all 3 machine screws.

Fig. 1

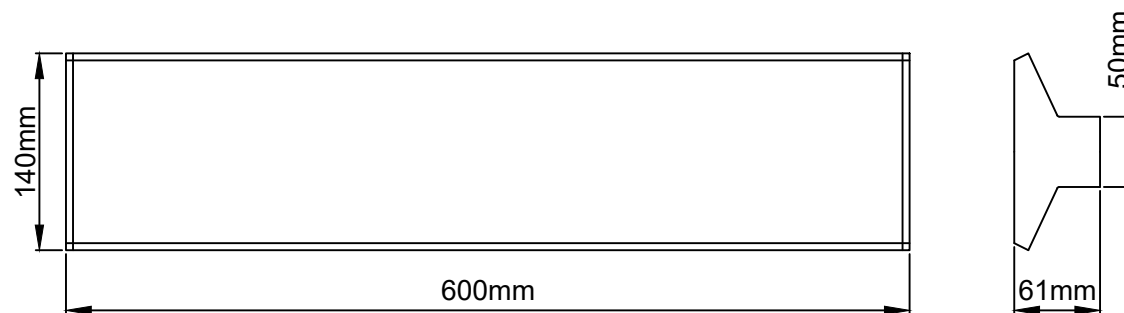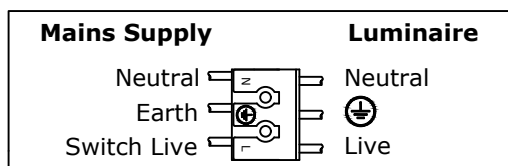

KSR7282

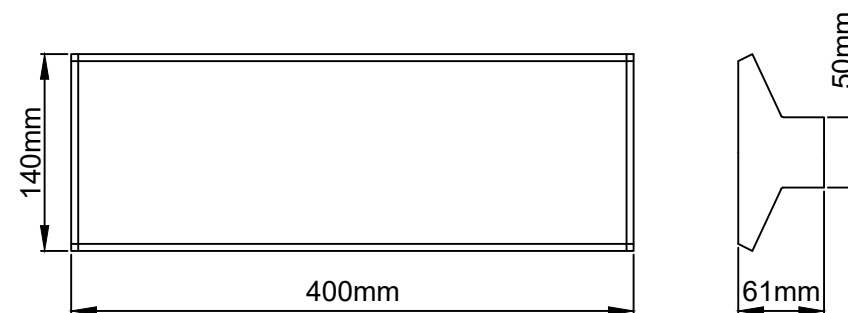

KSR7281

Lamp Specification					
	Wattage	Colour	Lumens	CRI	Available Finish
KSR7281	2x 8W	4000K	1620	Ra 80	White Finish Only
KSR7282	2x 12W	4000K	2560	Ra 80	Black or White

The light source and driver of this luminaire are replaceable; when the light source or driver reaches its end of life the whole luminaire can be serviced

*This product contains a light source of energy efficiency class E*

KSR Lighting Aftersales: 023 92 674343  
E-mail: aftersales@ksrlighting.com