


Installation Sheet

KSR5431



Read these instructions before commencing installation.
Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP54 IK08   0.5m 
110V~50Hz - 2 x 15W

These fittings are Class I and must be Earthed

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current wiring regulations & local building control. These products are designed for connection to a 110V~50Hz supply. Prior to installation, carry out the appropriate risk assessment considering the person or people who could be at risk and the precautions required to control the risk. Ensure the circuit supply is isolated either by the circuit supply fuse being removed or the applicable circuit breaker being turned off before installation or maintenance. Check the total load on the circuit does not exceed the rating of the circuit cable, fuse or circuit breaker. Long term use and continuous use as well as voltage fluctuations can reduce the lifespan of the fitting. Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature 0 - 30°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always switch off 110V supply before servicing.
This luminaire is suitable for indoor or exterior use and will require routine cleaning and more often if used in adverse environments where dust, paint, welding, oils etc are present, Do Not use solvents aggressive detergents, abrasives or similar. Do not use Megger or similar high voltage instruments. Due to the fact this luminaire contains electronic components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing. To prevent damage to the driver, do not mix with conventional magnetic ballasts on the same electrical circuit. At the end of life the luminaire is classed as WEEE and should be disposed of in accordance with local legislation.

Installation Procedure

Familiarize yourself with the luminaire/installation procedure and ensure the power is safely isolated before installing the luminaire. This twin headed tripod site light must be connected to a 110V supply via the 16A plugs supplied, please see overleaf for tripod set up and other important information Ensure plugs are properly located in sockets, the cable is not strained and dressed correctly so not a potential trip hazard.

*The LED light source and Control Gear
in this product is Non-replaceable.*

KSR Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com





KSR Lighting Ltd, Optimum House, Beeding Close, Southern Cross Trading Estate,
Bognor Regis, West Sussex, PO22 9TS.

Site Light Series



Sitio 110V - 2 x 15W Hand held Style with Tripod

Available finish:- Yellow Only

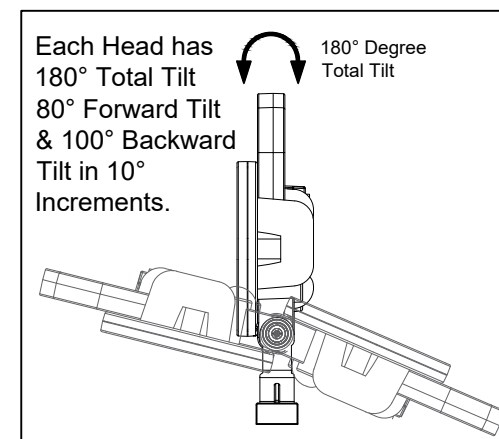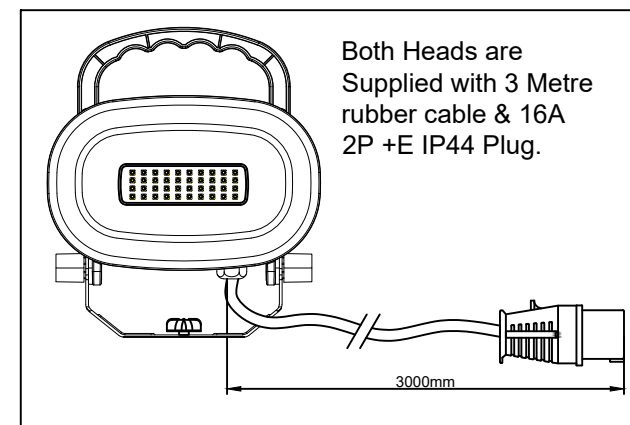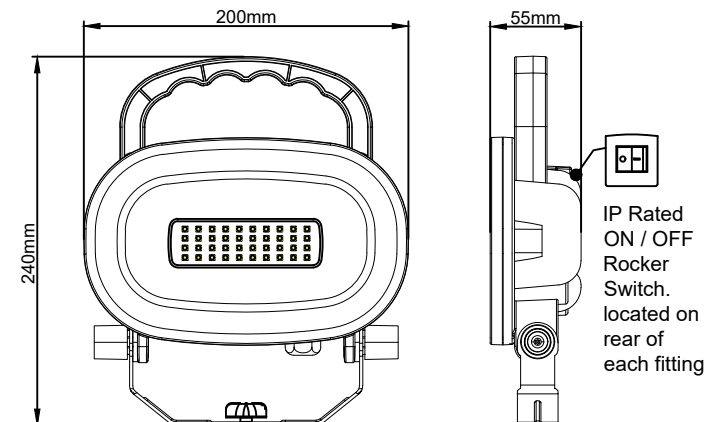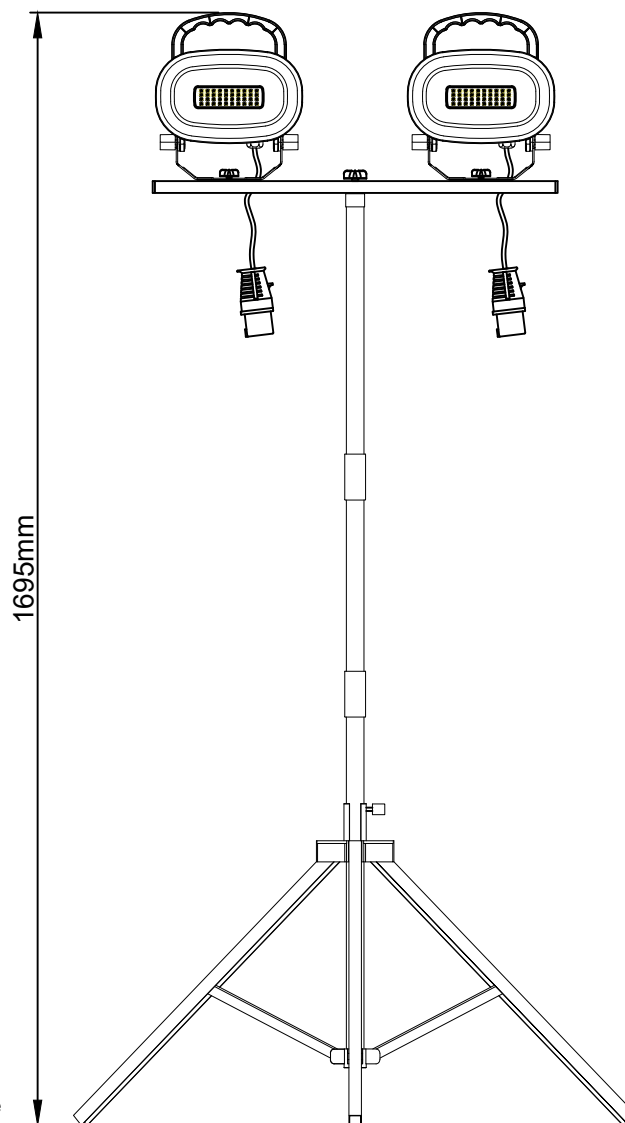


KSR

LIGHTING



Read these instructions before commencing installation.
Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.



UK CA CE - For use with KSR5414, KSR5415 & KSR5430.

Important Information

This accessory is designed to work with our site light luminaires & recommend they are installed and fitted by a qualified electrician ensuring the installation complies with current wiring regulations & local building control. This product is designed for use with our 110V~50Hz site light series (KSR5414, KSR5415 & KSR5430). Prior to installation, carry out the appropriate risk assessment considering the person or people who could be at risk and the precautions required to control the risk. Ensure any circuit supply is isolated either by the circuit supply fuse being removed or the applicable circuit breaker being turned off before installation or maintenance. Any faulty, broken or damaged parts should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always switch off 110V supply before servicing.
This accessory is suitable for indoor or exterior use and will require routine cleaning and more often if used in adverse environments where dust, paint, welding, oils etc are present, Do Not use solvents aggressive detergents, abrasives or similar.

Installation Procedure

Familiarize yourself with the luminaire & accessory installation procedure and ensure the power is safely isolated before installing a luminaire (refer to fitting instructions for luminaire) to this accessory, ensure the tripod is on even and stable ground with the legs spread at 750mm centres each apart, see guide to the right for extending or shortening ensuring all parts are sufficiently tightened. Once finished with your temporary installation the tripod folds down into a small & easily maneuverable tripod base accessory.

**Minimum Tripod
width between each
tripod leg = 750mm**




Lock Nut for holding KSR5430 in place - or Remove if fitting KSR5414 & KSR5415 as these have a threaded base part to locate in the threaded aperture.

Twist & Lock parts for extending or Shortening tripod height - Clockwise to tighten & Anti clockwise to loosen - Always ensure sufficiently tightened for fitting weight.


Threaded thumb screw - undo for releasing tripod legs and set apart equally at 750mm centres minimum to each leg stand - ensure tightened sufficiently and locked in place.

Available finish:- Yellow Only

**Maximum Tripod
Height = 1465mm**

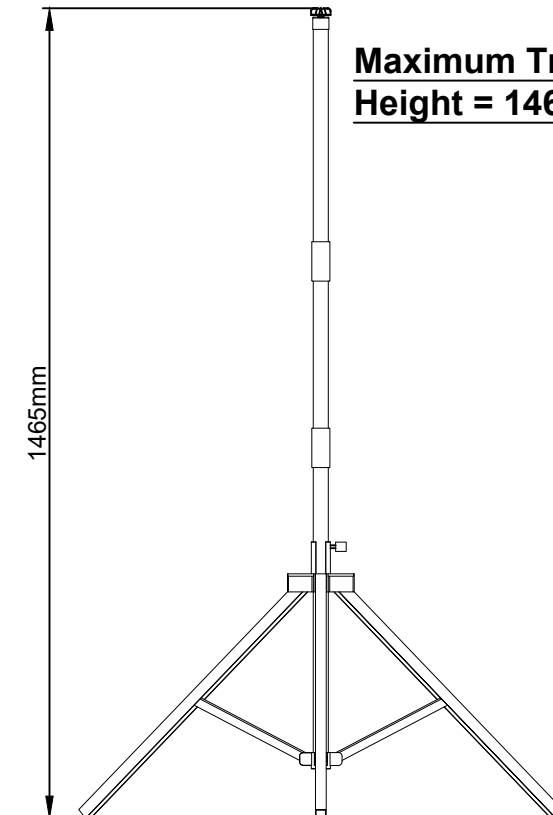

**Minimum Tripod
Height = 620mm**

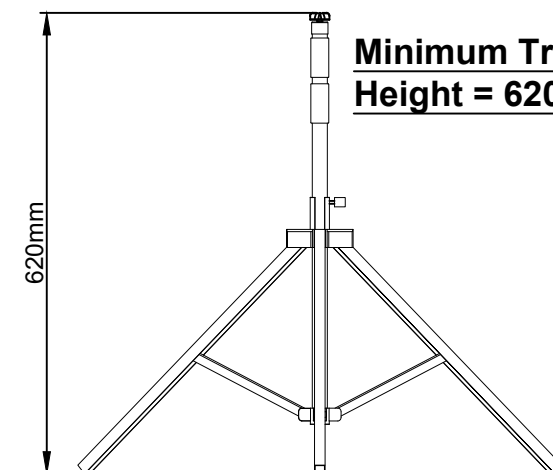

KSR Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com