



Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP20 UK CA CE

Important Information

It is recommended that the profile bar is installed and fitted by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control.

Any damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a sub-standard installation.

Installation Procedure

KSR recommend that you familiarize yourself with the connections and suitable locations for the profile bar.


The profile bar can be cut to a desired length. See Fig.1 for supplied accessories make sure end caps are fixed correctly and at either end of the bar.

If cutting you can order additional end caps and fixings if required.

See Fig.2 Commence attaching LED strip to the inside of profile bar (15mm maximum) ensuring the routing of all cables. Ensure the LED strip is adequately protected while plastering.

Prepare the wall/ceiling to accommodate the recessed channel, fix the profile in to the recess so the plaster will finish flush with the side of the channel using the larger holes and the fixing screws provided. Plaster the frame in place. Once the plaster is dry and all finishing is done snap the diffuser into the profile bar.

Fig.3 Shows the completed profile. Connect LED strip to a suitable supply and test as per the LED strip instructions.

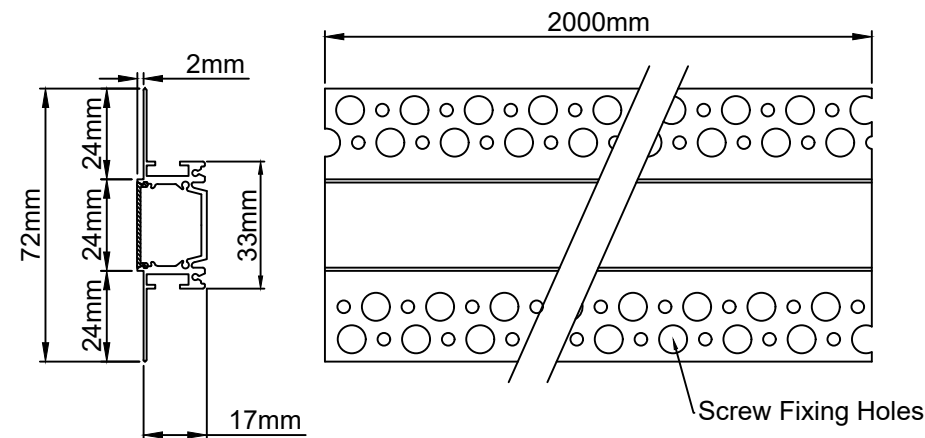

KSR9575


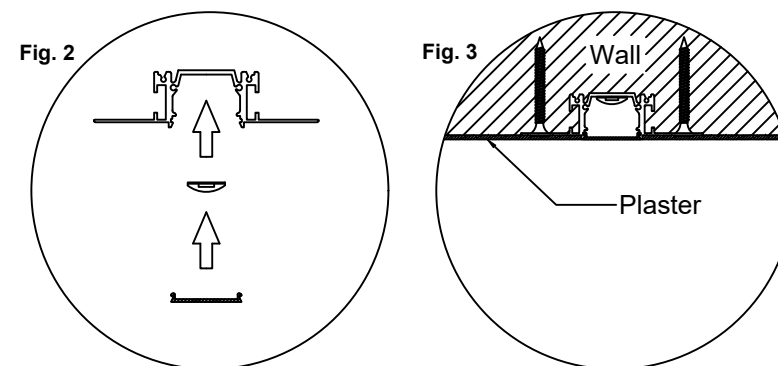


Fig. 1

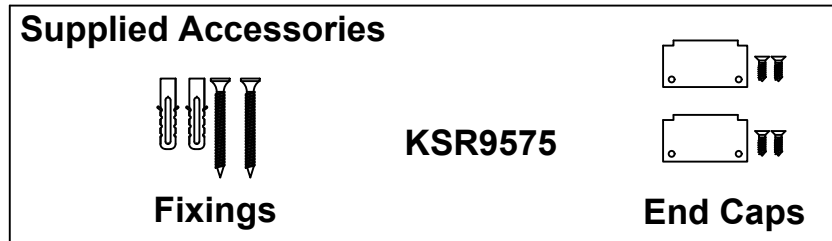

KSR
LIGHTING