KSRSF407


Roma Mini - Multi CCT & Dual Wattage LED Surface Fitting White

This product is suitable for indoor use only


Installation Instructions

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.


1 **Isolate mains supply.**



2 **Pull the rim off the main body and remove the diffuser / gear tray by turning the rim anti-clockwise. Remove the diffuser / gear tray from the body by unclipping the support strap.**




3 **Pass supply cable through grommet into the base section, or one of the other knockouts, Fix base to wall, ceiling or Besa Box using adequate fixings with regard to the type of surface. Ensure incoming cables are protected. Re-attach the support strap.**

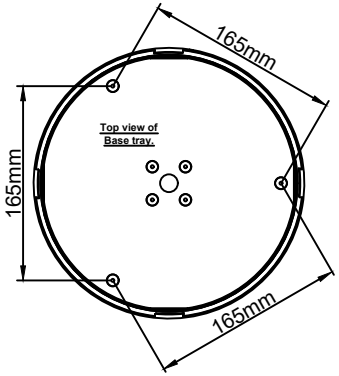

4 **Terminate wiring as shown below - Please note Earth Terminal is only supplied to aid the continuation of the Earth Circuit.**


Luminaire		Mains Supply
Not Used	PL	Not Used
SL- Brown	SL	Switch Live
	⏚	Earth Continuation
N - Blue	N	Neutral

5 **Select LED Colour & required Wattage using the switches on the LED Driver : Never change the LED colour or wattage with the luminaire powered on as this can damage the LED Chips & driver.**

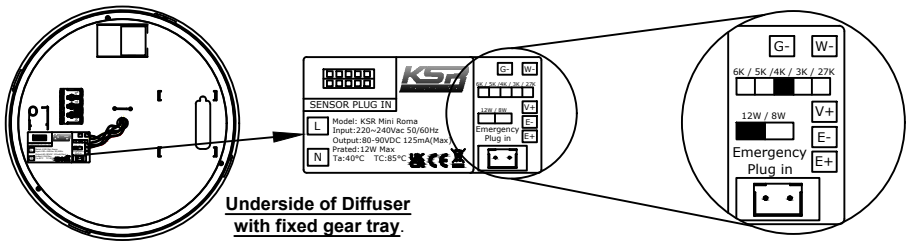


Underside of Diffuser with fixed gear tray.


6 **Re-install the Diffuser by lining up the line in the centre of the lock / unlock arrow on the Diffuser, approximately an inch from one of the locking tabs on the base, then twist clockwise to lock in place.**

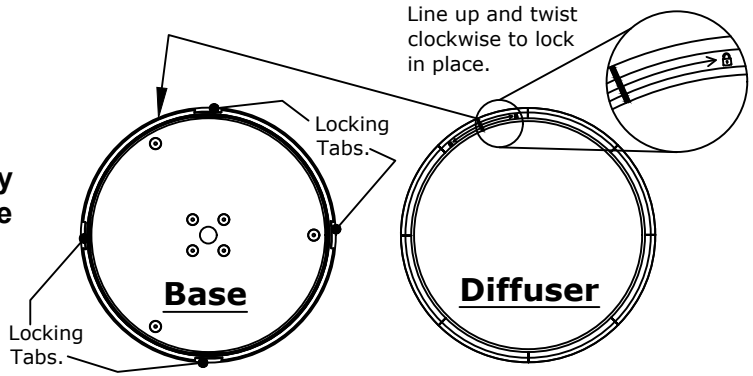

7 **The 4 knockout points (shown inside) on the Rim - to be lined up with the side conduit entry points on the base tray, then snap into place.**



8 **Turn on mains supply and test.**



KSRSF407-NIS-A-PJL

This product contains a light source of energy efficiency class F

Replaceable Light Source By a Professional

Replaceable Control Gear By a Professional

5 YEARS WARRANTY

Dual Wattage | 8W | 12W

2700K | 3000K | 4000K | 5000K | 6000K

IP65 | IK10

Important Information

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

Install Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current wiring regulations & local building control.

These products are designed for connection to a 240V~50Hz supply. Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature 0 ~ +35°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always switch off mains supply before servicing. If this luminaire is suitable for indoor use only it should not be fitted to damp or wet surfaces such as freshly plastered or painted walls or ceilings. Do not use Megger or similar high voltage instruments. Due to the fact LED luminaires contains electronic components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing. To prevent damage to the driver, do not mix with conventional magnetic ballasts on the same electrical circuit.

Please note: Depending on the amount of fittings on a circuit you may have to upgrade the breaker type due to the way electronic LED drivers start up with higher inrush currents compared to halogen lighting. If a dimmable fitting see the recommended dimmers list @ www.ksrlighting.com as well as available LDT Files. For any other questions please call our After Sales on 02392 674343

External Products

All of our external fittings must be installed by a qualified electrician and adhere to the regulations required for the installation. It is also recommended a quarterly cleaning schedule for products to be wiped down with a soft cloth, a petroleum based protective substance similar to WD40 can be used for extra protection against the elements. It is also recommended that all fixings and moving parts are greased prior to installation and again quarterly if required. Do not try to seal any exterior product yourself.

Waste Electrical and Electronic Equipment (W.E.E.E.)

Under the Waste Electrical and Electronic Equipment (WEEE) Regulations, any KSR Lighting product displaying the crossed-out wheeled bin symbol must not be disposed of with general household or commercial waste. KSR Lighting does not charge customers any additional fees for the collection, treatment, recycling, or disposal of WEEE-compliant products. To help protect the environment and human health, end-of-life electrical products should be separated from other waste streams and disposed of through appropriate recycling facilities. Correct disposal enables valuable materials to be recovered and reused while reducing the environmental impact of waste. Customers are encouraged to contact their local authority, recycling centre, or retailer for information on available collection and recycling services in their area. Where a WEEE disposal charge was included by the supplier at the time of purchase, customers should contact that supplier directly regarding any take-back arrangements and the appropriate disposal of the product.

Warranty

All products carry at least a 1 year warranty, some items are 3 years and the majority of the range is 5 years, please go to www.ksrlighting.com for full warranty details - Should a product fail within the warranty period, KSR will repair or replace. KSR will not accept any responsibility for costs associated to the replacement of the product.

KSR Lighting Ltd, Optimum House, Beeding Close,
Southern Cross Trading Estate, Bognor Regis, West
Sussex, PO22 9TS.

Contact KSR After Sales :-
02392 674343
aftersales@ksrlighting.com