



# Siena

# Asymmetric

# Floodlights

LED Floodlights

Data Sheet

## Product Information

The Siena Asymmetric high powered LED floodlight range is available in four wattages 50W, 100W, 150W, or 200W as well as built-in Photocell versions. With a high colour rendering and come complete with a 3-year warranty.

## Product Features

- 3 year warranty
- High efficiency
- 4000K LED
- Non-Dimmable
- Asymmetrical LED's
- IP65
- IK08
- CRI: Ra>80
- Instant on
- Built in Photocell Options
- c/w 1.5M Mains cable
- Lighting designers can download photometric data from our website
- L70 – 36,000hrs

# Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm) / CRI
KSR5320	Siena 50W 4000K Asymmetric LED Floodlight	50	4000	4550 / 82
KSR5321	Siena 50W 4000K Asymmetric LED Floodlight c/w Photocell	50	4000	4550 / 82
KSR5322	Siena 100W 4000K Asymmetric LED Floodlight	100	4000	10890 / 82
KSR5323	Siena 100W 4000K Asymmetric LED Floodlight c/w Photocell	100	4000	10890 / 82
KSR5324	Siena 150W 4000K Asymmetric LED Floodlight	150	4000	17650 / 80
KSR5325	Siena 150W 4000K Asymmetric LED Floodlight c/w Photocell	150	4000	17650 / 80
KSR5326	Siena 200W 4000K Asymmetric LED Floodlight	200	4000	21030 / 84
KSR5327	Siena 200W 4000K Asymmetric LED Floodlight c/w Photocell	200	4000	21030 / 84

Nominal voltage	180-265V
Operating frequency	50-60Hz
Ambient temperature range	0°C~+40°C
Start time	< 0.5 sec
Protection Class	I
CRI	Ra>80
IP rating	IP65

## Construction

Body: Cast Aluminium  
Diffuser: Glass


## Standards

EN60598-2-5:2015      Luminaires – Part 2-5: Floodlights

## In Conformity with

LVD                      Low voltage directive 2014/35/EU  
EMC                     Electromagnetic compatibility directive 2014/30/EU  
ERP                      Energy related products directive 2019/2020/EU  
RoHS                    Restriction of hazardous substances 2015/863/EU

## Product Dimensions

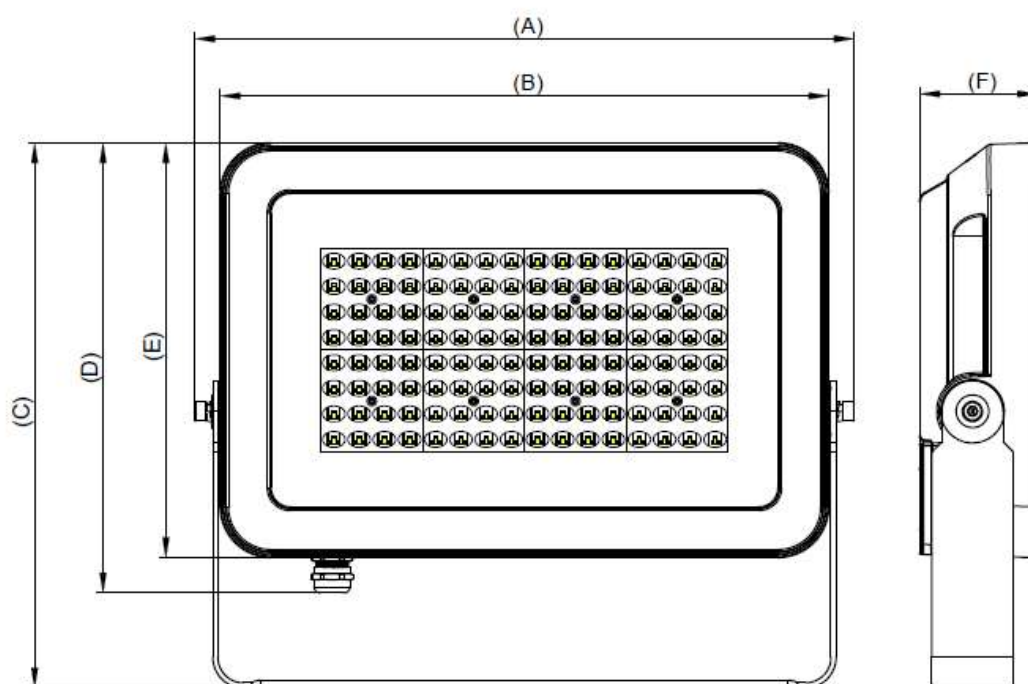

Product Code & Description	Dimension A.	B.	C.	D.	E.	F.
KSR5320 - 50W Asymmetric Floodlight	230mm	210mm	225mm	180mm	155mm	50mm
KSR5321 - 50W Asymmetric Floodlight c/w Photocell	230mm	210mm	225mm	180mm	155mm	50mm
KSR5322 - 100W Asymmetric Floodlight	340mm	300mm	295mm	225mm	200mm	55mm
KSR5323 - 100W Asymmetric Floodlight c/w Photocell	340mm	300mm	295mm	225mm	200mm	55mm
KSR5324 - 150W Asymmetric Floodlight	400mm	360mm	340mm	280mm	260mm	60mm
KSR5325 - 150W Asymmetric Floodlight c/w Photocell	400mm	360mm	340mm	280mm	260mm	60mm
KSR5326 - 200W Asymmetric Floodlight	400mm	360mm	340mm	280mm	260mm	60mm
KSR5327 - 200W Asymmetric Floodlight c/w Photocell	400mm	360mm	340mm	280mm	260mm	60mm

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.