



Rim finish:- Chrome

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP20 240V~50Hz GU10 5.5W

These fittings are Class II and do not require an Earth

### Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply. Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

### Important User Advice


Always switch off mains supply before servicing/lamp changes. This product is designed to be used indoors only and is IP rated from the front as per the bezel installed. Please ensure that you have a strong WiFi signal at the installation area.

### Installation Procedure

KSR recommends that a sample hole is cut in some scrap material to familiarize yourself with the installation. Once you are completely satisfied:  
 Locate the area's suitable to install these luminaires.  
 Safely isolate the mains supply.  
 Cut a 72mm round hole in the ceiling and ensure sufficient ceiling void without infringing on joists, water pipes or electrical cables.  
 Connect the lampholder to the mains supply (Brown - Live and Blue - Neutral). Snap the terminal cover down until the cable strain relief is gripping the outer insulation and fit the lampholder to the frame by sliding the bracket in to the spring clip please note this will be a tight fit as per Fig.1.  
 Fit the frame in to cut-out by pushing the two spring clips up so the run parallel with the frame, feed the springs gently in the cutout and release to let the frame pull itself into place.  
 The downlight should NOT be covered in mineral wool insulation.  
 Insert your lamp into the lamp holder.  
 It is recommended before inserting the lamp into the luminaire that you download the app and connect the lamp to your WiFi (see how to connect the lamp to your App/WiFi using the instructions in lamp box) to ensure your WiFi connection is good before fully installing.  
 Install the lamp into the retaining ring on the bezel (supplied), feed the lamp and lampholder cables into the frame/void and twist the bezel clockwise until resistance is felt, Do not over tighten to ease lamp changes.  
 Turn on the mains supply to test the luminaire.

Fig. 1


Slide lampholder bracket into spring clip

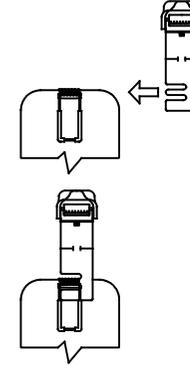

ØCut out




72mm

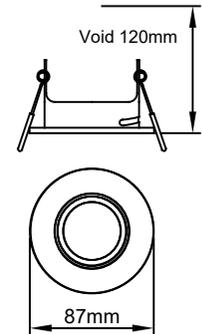

KSRWIZ109

### Installer Note:

To ensure a good connection strip back a 8.5-10mm of insulation and push the cable firmly into the terminal block.



Cable size 0.75~1.5mm

### Lamp Details

KSRLP952  
 Colour:4000K  
 Wattage: 5.5w  
 Lumens: up to 425  
 CRI: Ra82  
 Lamp Cap: GU10

KSR Lighting Aftersales: 023 92 674343  
 E-mail: aftersales@ksrlighting.com

