



Navara COB 1M, 3M & 5M 24V IP67 LED Strip Rolls

LED Strip Lighting



Data Sheet

Product Information

Our Navara COB continuous 24V IP67 LED Strip is available in 1M, 3M & 5M rolls. ideal for lighting applications where feature lighting is required at custom Lengths specific to the installation.

At only 10.5mm wide this range is well suited to residential and commercial applications with or without the use of profile for seamless continuous LED lengths.

Bespoke longer lengths also available:-
(bespokeled@ksrlighting.com)

Product Features

- 3-year warranty
- IP67 Continuous LED
- Available in 2700K, 3000K, 4000K & 6000K
- Dimming options - Dimmable via remote control using KSR9564 & KSR9566, Wall Controllers using KSR9564 & KSR95200-201 or KSR95207-208 with an effective range up to 30M or Rotary dimming using KSRDL292/3
- 8W or 11W per metre options
- Class II for Power supply and Class III for LED Strip
- 24V Constant Voltage
- 3M Self-adhesive Backing
- Can be cut every 50mm
- Supplied c/w 1 Metre feed tail

Product Specification

Product Code	Product Description	Wattage Per Metre (W)	Total Wattage (W)	CCT (K)	CRI (Ra)	Lumens Per Metre / Total (lm)	Protection Class
KSR95132	Navara 1M 8W 2700K IP67 LED 24V Strip*	8W	8W	2700	90	760lm	III
KSR95133	Navara 1M 8W 3000K IP67 LED 24V Strip*	8W	8W	3000	90	784lm	III
KSR95134	Navara 1M 8W 4000K IP67 LED 24V Strip*	8W	8W	4000	90	872lm	III
KSR95135	Navara 1M 8W 6000K IP67 LED 24V Strip*	8W	8W	6000	90	960lm	III
KSR95136	Navara 3M 8W 2700K IP67 LED 24V Strip*	8W	24W	2700	90	760lm / 2280lm	III
KSR95137	Navara 3M 8W 3000K IP67 LED 24V Strip*	8W	24W	3000	90	784lm / 2352lm	III
KSR95138	Navara 3M 8W 4000K IP67 LED 24V Strip*	8W	24W	4000	90	872lm / 2616lm	III
KSR95139	Navara 3M 8W 6000K IP67 LED 24V Strip*	8W	24W	6000	90	960lm / 2880lm	III
KSR95140	Navara 5M 8W 2700K IP67 LED 24V Strip*	8W	40W	2700	90	760lm / 3800lm	III
KSR95141	Navara 5M 8W 3000K IP67 LED 24V Strip*	8W	40W	3000	90	784lm / 3920lm	III
KSR95142	Navara 5M 8W 4000K IP67 LED 24V Strip*	8W	40W	4000	90	872lm / 4360lm	III
KSR95143	Navara 5M 8W 6000K IP67 LED 24V Strip*	8W	40W	6000	90	960lm / 4800lm	III
KSR95156	Navara 1M 11W 2700K IP67 LED 24V Strip*	11W	11W	2700	90	1067lm	III
KSR95157	Navara 1M 11W 3000K IP67 LED 24V Strip*	11W	11W	3000	90	1089lm	III
KSR95158	Navara 1M 11W 4000K IP67 LED 24V Strip*	11W	11W	4000	90	1155lm	III
KSR95159	Navara 1M 11W 6000K IP67 LED 24V Strip*	11W	11W	6000	90	1298lm	III
KSR95160	Navara 3M 11W 2700K IP67 LED 24V Strip*	11W	33W	2700	90	1067lm / 3201lm	III
KSR95161	Navara 3M 11W 3000K IP67 LED 24V Strip*	11W	33W	3000	90	1089lm / 3267lm	III
KSR95162	Navara 3M 11W 4000K IP67 LED 24V Strip*	11W	33W	4000	90	1155lm / 3465lm	III
KSR95163	Navara 3M 11W 6000K IP67 LED 24V Strip*	11W	33W	6000	90	1298lm / 3894lm	III
KSR95164	Navara 5M 11W 2700K IP67 LED 24V Strip*	11W	55W	2700	90	1067lm / 5335lm	III
KSR95165	Navara 5M 11W 3000K IP67 LED 24V Strip*	11W	55W	3000	90	1089lm / 5445lm	III
KSR95166	Navara 5M 11W 4000K IP67 LED 24V Strip*	11W	55W	4000	90	1155lm / 5775lm	III
KSR95167	Navara 5M 11W 6000K IP67 LED 24V Strip*	11W	55W	6000	90	1298lm / 6490lm	III
Accessories							
KSR9564	Navara LED Receiver/Controller***						II
KSR9566	Navara Single Colour Remote***						N/A
KSR95200 & KSR95201	Navara Single Colour 240V Dimming Wall Panel (95200 Black & 95201 White)						III
KSR95207 & KSR95208	Navara Single Colour Battery Dimming Wall Panel (95207 Black & 95208 White)						N/A
KSRDL287	20W 24V Non Dimmable Constant Voltage Driver**		20W				II
KSRDL288	60W 24V Non Dimmable Constant Voltage Driver**		60W				II
KSRDL289	100W 24V Non Dimmable Constant Voltage Driver**		100W				II
KSRDL292	25W 24V Dimmable Constant Voltage Driver**		25W				II
KSRDL293	50W 24V Dimmable Constant Voltage Driver**		50W				II
KSRDL294	100W 24V Dimmable Constant Voltage Driver**		100W				II

KSRDL295	100W 24V Dimmable Constant Voltage Driver		100W		I
KSRDL296	200W 24V Dimmable Constant Voltage Driver		200W		I
KSRDL276	240W 24V Constant Voltage Driver		240W		I
KSRDL277	320W 24V Constant Voltage Driver		320W		I

Nominal voltage	24V
Operating frequency	50/60Hz
Circuit Wattage	8W or 11W per metre
Max Bend Radius	60mm Diameter
Beam Angle	180 Deg
Width	10.5mm
Height	4.5mm
Ambient temperature range	0°C to +35°C
IP rating	67

Construction

Coating: Clear Silicone


Standards

BSEN60598-1:2021 Luminaires – Part 1: General requirements and tests

In Conformity with

LVD Low voltage directive 2014/35/EU
EMC Electromagnetic compatibility directive 2014/30/EU
ERP Energy related products directive 2019/2020/EU
RoHS Restriction of hazardous substances 2015/863/EU

Product Dimensions

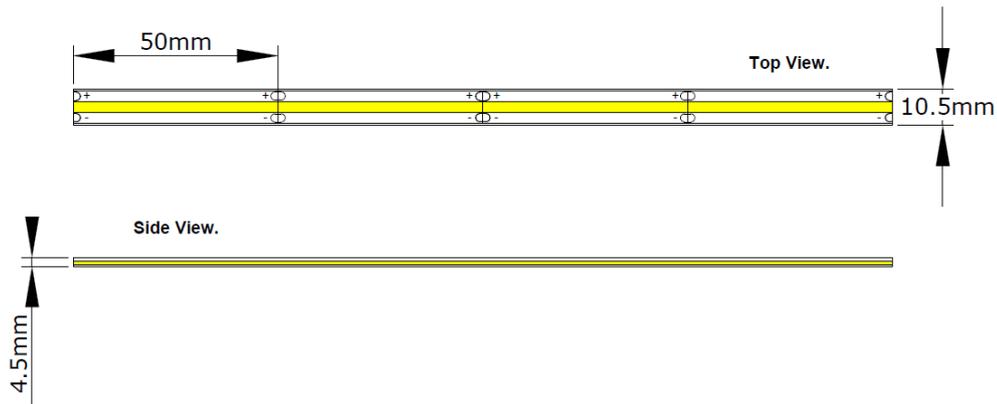

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.