

Tresco Optic ST Emergency NM Downlight

Commercial Lighting



Data Sheet

Product Information

The **Tresco Optic Self-Test** Non-Maintained Emergency recessed downlight is supplied complete with 2 optic lenses.

The **wide beam angle** feature provides greater coverage for open spaces and the escape route optic lens for a **narrow-focused beam angle**, thus allowing you to use less fittings for your emergency lighting requirements.

KSR98108 – Shown with Wide Beam Lens



Product Features

- 5-year warranty
- Class II
- IP20
- 6000K LED
- Self-Test NM Emergency
 - Open Area - Wide Beam Angle Lens: 135°
- Escape Route - Narrow Beam Angle Lens: 80°
- Black or White Finish
- Lighting designers can download photometric data from our website.

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Protection Class
KSR98107	Tresco Optic ST 5W Emergency Self-Test Downlight c/w lenses White	5W	6000	190lm	80	II
KSR98108	Tresco Optic ST 5W Emergency Self-Test Downlight c/w lenses Black	5W	6000	190lm	80	II

Emergency Parameters


Circuit Wattage	5W
Circuit Current	0.02A
Cells	6.4v 3200mAh LiFePO4
LOR %	100%
IP Rating	20
Ambient Temperature Range	5°c to +25°c

Construction

Body:	Polycarbonate
Lens:	Polycarbonate

Product Dimensions

KSR98107 & KSR98108

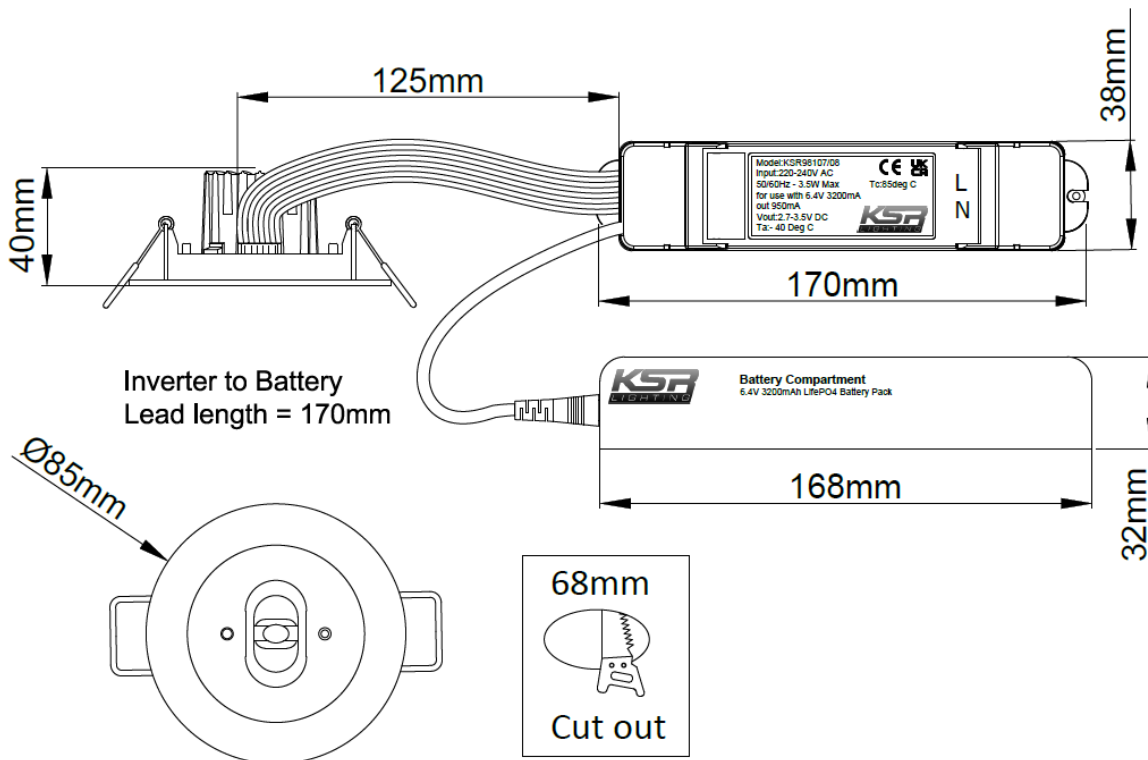

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.