



# Norte LED Street Lights

LED Street lights



Data Sheet

## Product Information

Introducing the KSR Lighting **Norte LED Streetlights**, designed to illuminate your streets with efficiency and style. Available in **two sizes, choose your wattage** from the 24W, 36W, 48W or 60W model, or opt for the larger 40W, 60W, 80W or 100W version, each boasting versatile **3CCT** technology for customisable lighting temperatures. Crafted with durable cast aluminium and featuring an elegant anthracite finish, these lights combine durability with aesthetics, ensuring both functionality and visual appeal for your outdoor spaces. With KSR Lighting Norte LED streetlights, illuminate your surroundings with confidence and sophistication.



[KSR99112](#)

## Product Features

- 5 year warranty
- Class I
- IP66
- IK08
- Up to 12760 Lumens
- CRI: Ra>79
- Selectable Wattages up to 100W LED
- Selectable Colour Temperatures 2700K, 3500K or 4000K
- Plug in Photocell Available
- Spigot Reducer Available
- Supplied with 300mm Cable
- 30 Deg Tilt (15 Deg in either direction in 5 Deg increments)
- Cast Aluminium
- Anthracite Finish
- L70 – 50,000hrs

[www.ksrlighting.com](http://www.ksrlighting.com)

KSR99110-KSR99112-DS-A-18<sup>th</sup> April 2024

# Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI:Ra	Energy Efficiency	Class
KSR99110 Norte 24W/36W/48W/60W 3CCT LED Street Light Anthracite		24W	2700K	3120lm	80	D	I
			3500K	3300lm	82		
			4000K	3420lm	82		
		36W	2700K	4580lm	80	D	
			3500K	4875lm	83		
			4000K	4995lm	79		
		48W	2700K	5770lm	79	E	
			3500K	6160lm	83		
			4000K	6265lm	82		
		60W	2700K	7420lm	80	E	
			3500K	8030lm	82		
			4000K	8055lm	82		
KSR99111 Norte 40W/60W/80W/100W 3CCT LED Street Light Anthracite		40W	2700K	4590lm	80	E	I
			3500K	4800lm	82		
			4000K	4990lm	82		
		60W	2700K	6635lm	80	E	
			3500K	6945lm	83		
			4000K	7155lm	82		
		80W	2700K	8510lm	80	E	
			3500K	9040lm	83		
			4000K	9275lm	82		
		100W	2700K	11845lm	80	E	
			3500K	12760lm	82		
			4000K	12760lm	82		
<b>Accessories</b>							
KSR99112	Norte Photocell for LED Streetlights						
KSR99116	Norte Spigot Reducer 76mm – 60mm						


Nominal voltage	240-277V
Operating frequency	50-60Hz
Circuit Wattage	
Circuit Current	2.1A Max / 2.8A Max
Driver Current Rating	
PFC	0.95
In Rush Current	
Start time	< 0.5 sec
Protection Class	I
Ambient temperature range	0°C~+40°C
IP rating	IP66
Nett Weight	KSR99110 = 3.9kg / KSR99111 = 5.4kg

## Construction

Body: Cast Aluminium  
Diffuser: Glass


# Product Dimensions

## KSR99110

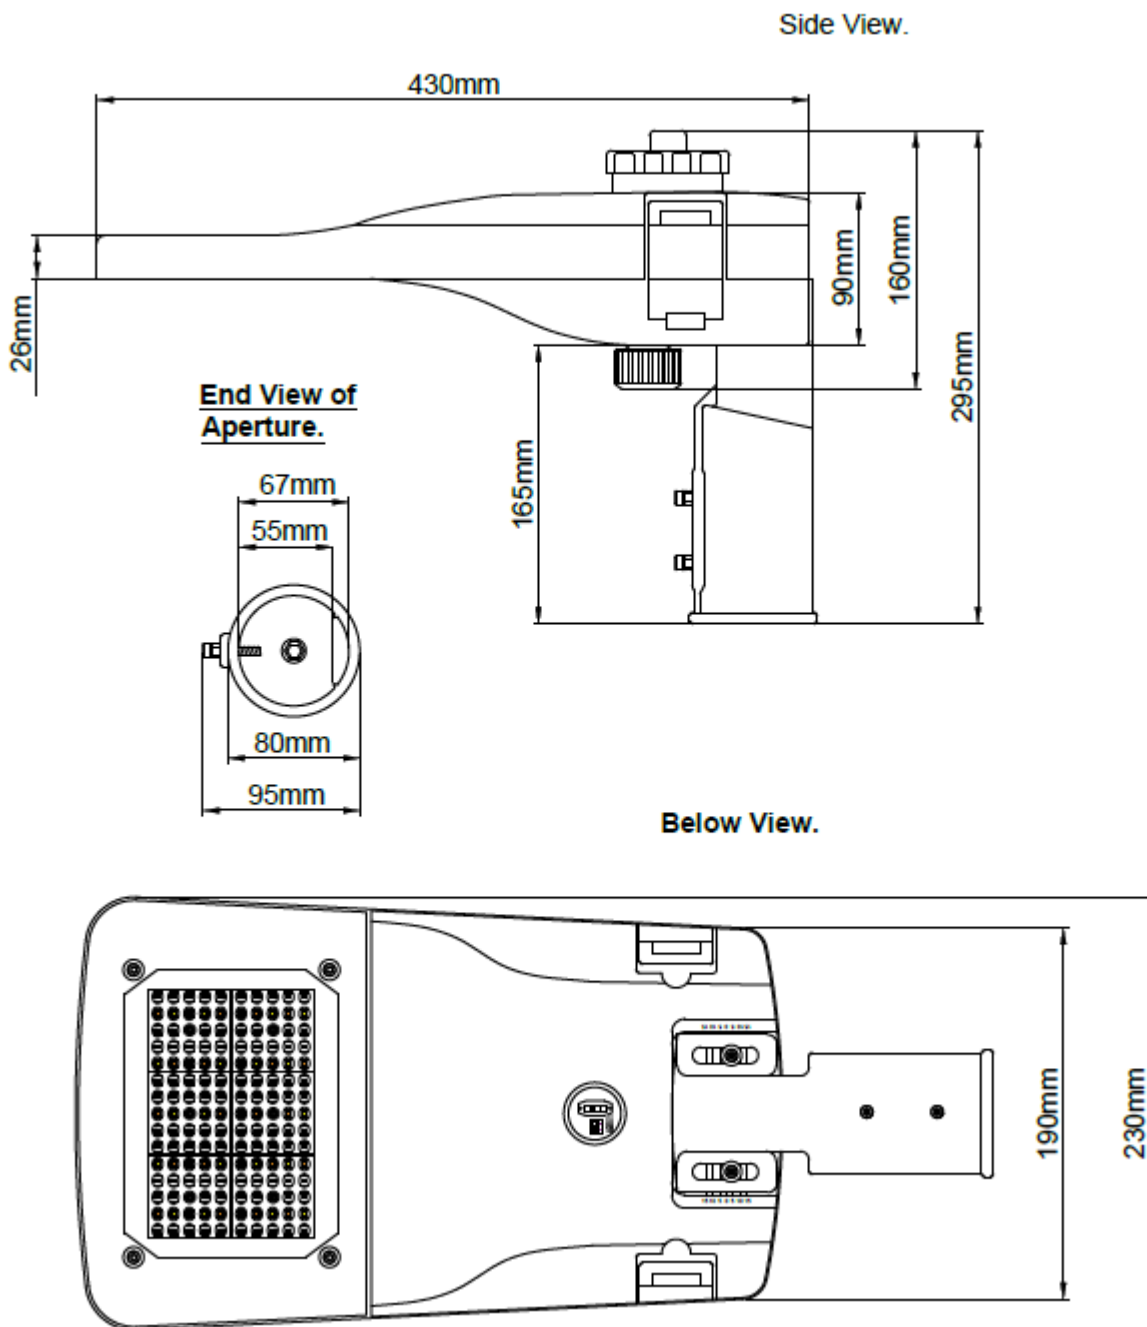


# KSR99111

Side View.


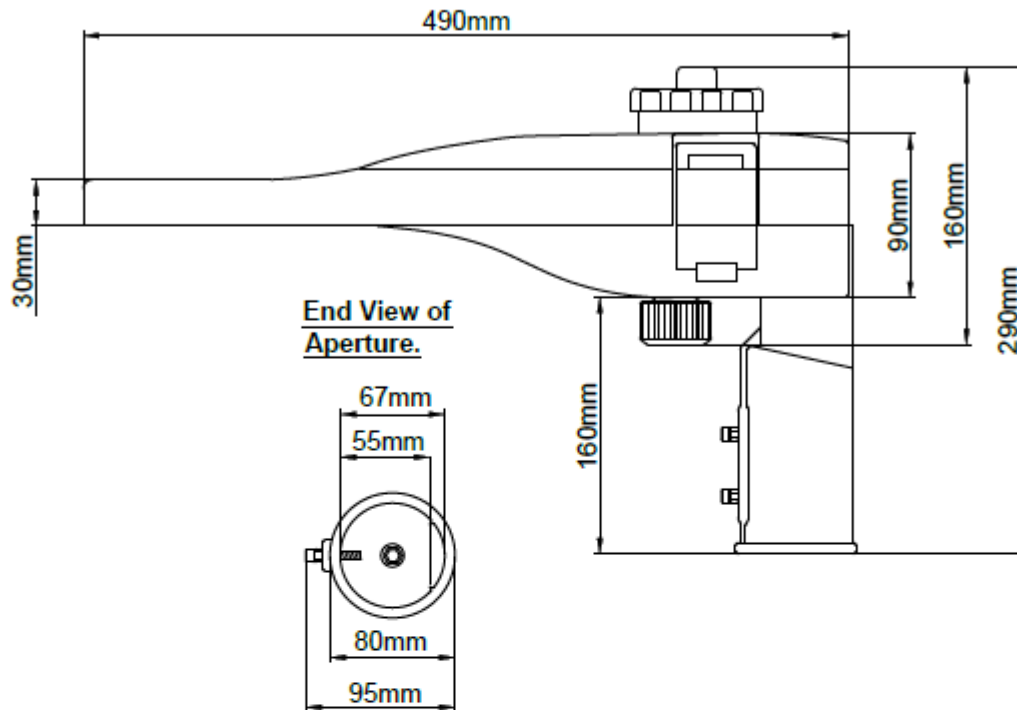


Below View.


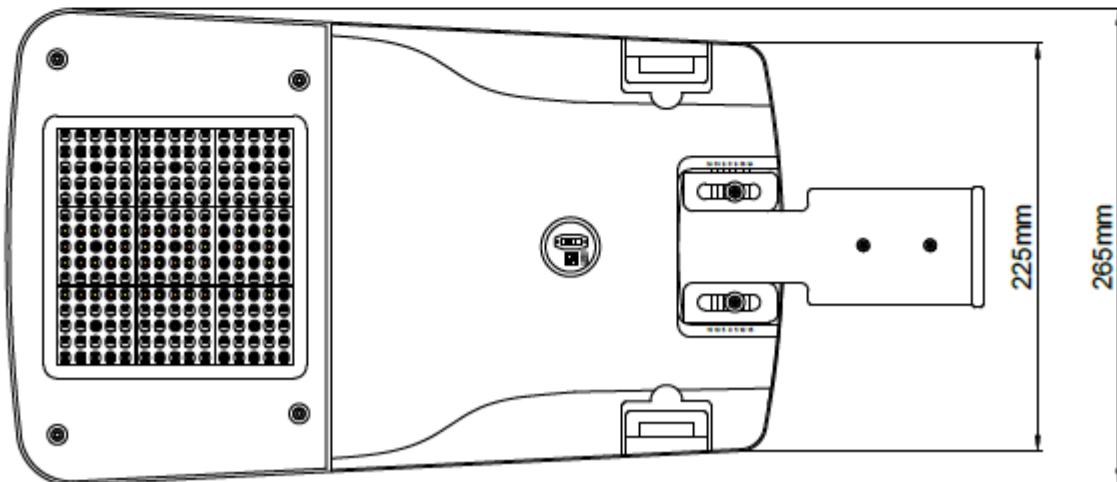


**Both Versions can be mounted & angled if required as per below**

30 Deg Tilt (15 Deg either way)  
in 5 Deg Increments.

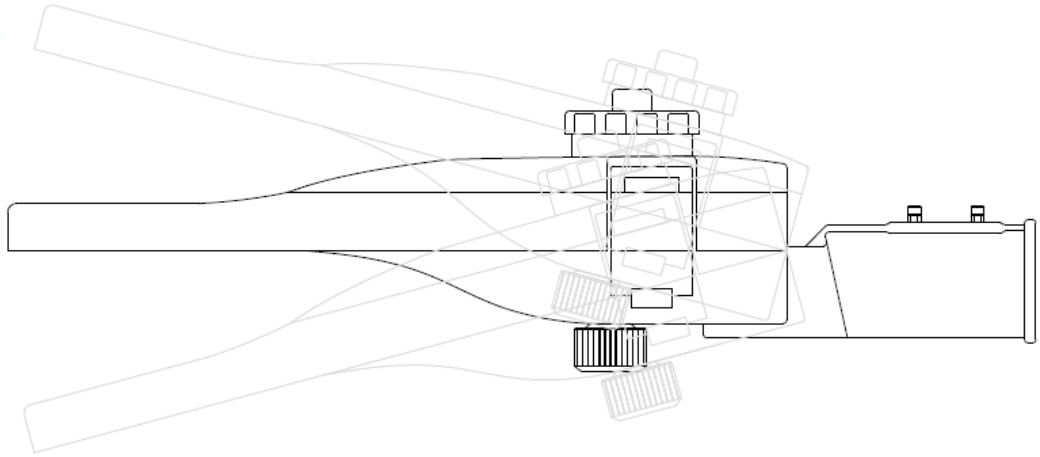


30 Deg Tilt (15 Deg either way)  
in 5 Deg Increments.

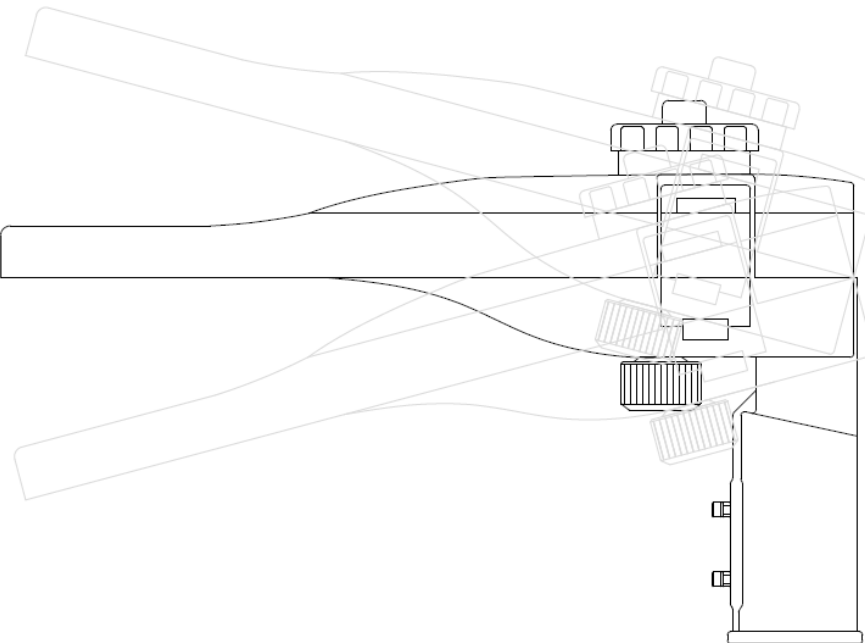


# KSR99112


Top View.

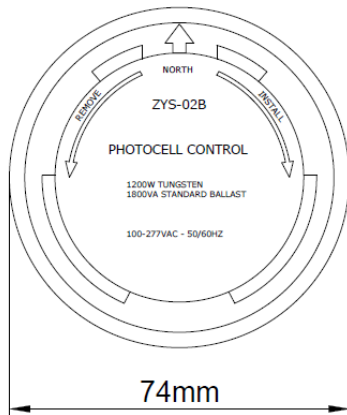

Side View.

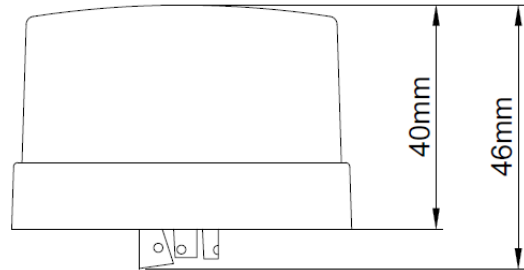

# KSR99116

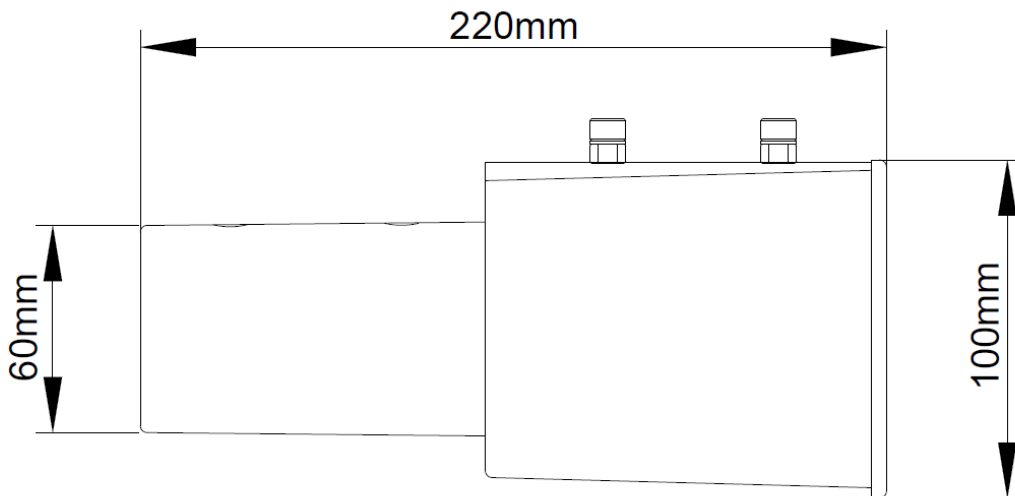

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.