

Cortina LED Wall Recessed Range

Residential



Product Information

Elevate your space with the sleek and versatile KSR Cortina LED recessed wall Range. Designed with both functionality and style in mind, at only 60mm diameter or square these fittings offer an inobtrusive low level option to suit any environment.

Enjoy a warm and inviting ambiance with the 27K or 3K colour temperatures. And with 4K Achieve a seamless and streamlined look with recessed installation, minimising visual clutter and maximizing aesthetic appeal. Illuminate Stairwells, hallways, kitchens or any area at low level with the Cortina fittings to enhance both functionality and ambiance.

Complete with a 3-year warranty for your peace of mind.

Product Features

- 3-year warranty
- IP20
- Class II
- 1.2W LED
- 3CCT Colour Temperature Selectable 2700K, 3000K or 4000K
- 4 Designs Slot, Triangle, Round or Square
- 3 Finishes Black, Brushed Brass or White
- Magnetic Front Plates
- Supplied complete with LED Driver
- CRI: Ra>80
- Non-dimmable
- L70/B30 30,000hrs

KSR7372



KSR7377





www.ksrlighting.com

Product Specification

| Product Code | Product Description | Wattage (W) | CCT (K) | Lumens (lm) | CRI (Ra) | Energy Efficiency Class 2021 | Protection Class |
|---------------------------|-------------------------------|----------------|------------|----------------|-------------|------------------------------------|---------------------|
| | | | | | | | |
| Slot recessed Light White | | 3000K | | | | | |
| | | 4000K | | | | | |
| KSR7371 | Cortina 1.2W 3000K LED Wall | 1.2W | 2700K | 30 | >80 | F | II |
| | Slot recessed Light Black | | 3000K | | | | |
| | | | 4000K | | | | |
| KSR7372 | Cortina 1.2W 3000K LED Wall | 1.2W | 2700K | 50 | >80 | F | II |
| | Slot recessed Light Brushed | | 3000K | | | | |
| | Brass | | 4000K | | | | |
| KSR7373 | Cortina 1.2W 3000K LED Wall | 1.2W | 2700K | 60 | >80 | F | II |
| | Triangle recessed Light White | | 3000K | | | | |
| | | | 4000K | | | | |
| KSR7374 | Cortina 1.2W 3000K LED Wall | 1.2W | 2700K | 30 | >80 | F | II |
| | Triangle recessed Light Black | | 3000K | | | | |
| | | | 4000K | | | | |
| KSR7375 | Cortina 1.2W 3000K LED Wall | 1.2W | 2700K | 40 | >80 | F | II |
| | Triangle recessed Light | | 3000K | | | | |
| | Brushed Brass | | 4000K | | | | |
| KSR7376 | Cortina 1.2W 3000K LED Wall | 1.2W | 2700K | 50 | >80 | F | II |
| | Round recessed Light White | | 3000K | | | | |
| | | | 4000K | | | | |
| KSR7377 | Cortina 1.2W 3000K LED Wall | 1.2W | 2700K | 25 | >80 | F | II |
| | Round recessed Light Black | | 3000K | - | | | |
| | | | 4000K | | | | |
| KSR7378 | Cortina 1.2W 3000K LED Wall | 1.2W | 2700K | 40 | >80 | F | II |
| | Round recessed Light | | 3000K | - | | | |
| | Brushed Brass | | 4000K | | | | |
| KSR7379 | Cortina 1.2W 3000K LED Wall | 1.2W | 2700K | 60 | >80 | F | II |
| | Square recessed Light White | | 3000K | 1 | | | |
| | | | 4000K | | | _ | |
| KSR7380 | Cortina 1.2W 3000K LED Wall | 1.2W | 2700K | 25 | >80 | F | II |
| | Square recessed Light Black | | 3000K | - | | | |
| | | | 4000K | _ | | | |
| KSR7381 | Cortina 1.2W 3000K LED Wall | 1.2W | 2700K | 40 | >80 | F | II |
| | Square recessed Light | | 3000K | | | | |
| | Brushed Brass | | 4000K | | | | |

| Nominal voltage | 220~240VAC |
|---------------------------|------------|
| Operating frequency | 50Hz |
| Driver Current | 350mA |
| Circuit Current | 0.06A |
| Ambient temperature range | 0°c~+35°c |
| Start time | < 0.5 sec |
| IP rating | 20 |


Construction.


Main Body: Polycarbonate

Front Plate: Steel

Product Dimensions

KSR7370-KSR7381

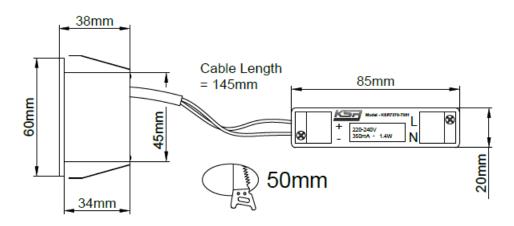

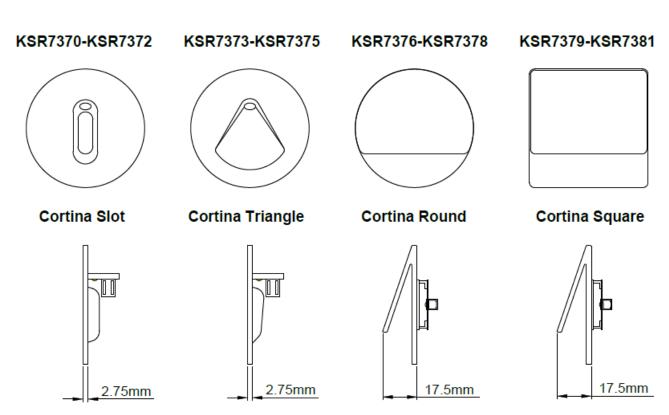

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.