

Available Finishes: Black or White

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP20 240V~50Hz 30W

## Important Information


It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply. Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature -20 ~ +40°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

## Important User Advice

Always switch off mains supply before servicing or moving track lighting.  
The KSR track system is suitable for indoor use only and should not be fitted to damp or wet surfaces such as freshly plastered or painted walls.  
Never exceed the maximum 16A load per circuit.

## Installation Procedure

Once the three circuit track system has been installed familiarise yourself with the luminaire.  
Prior to inserting the fitting into the track ensure the locking tab is in the correct position, the tab should be to the side of the track connector.  
Ensure the circuit selection dial is on the '0' position.  
Insert the track fitting into the track, the track connector is handed and will only fit into the track one way round, do not force the fitting into place.  
Pull the locking tab round to secure the fitting into the track.  
Rotate the circuit selector to the desired switched circuit.  
Turn on the power and test the luminaire.  
Adjust the fitting to the desired position, the head section will tilt and rotate, do not force the adjustment past the stopping point.  
Rotate the front face of the luminaire between 20° and 60° as required for the application.

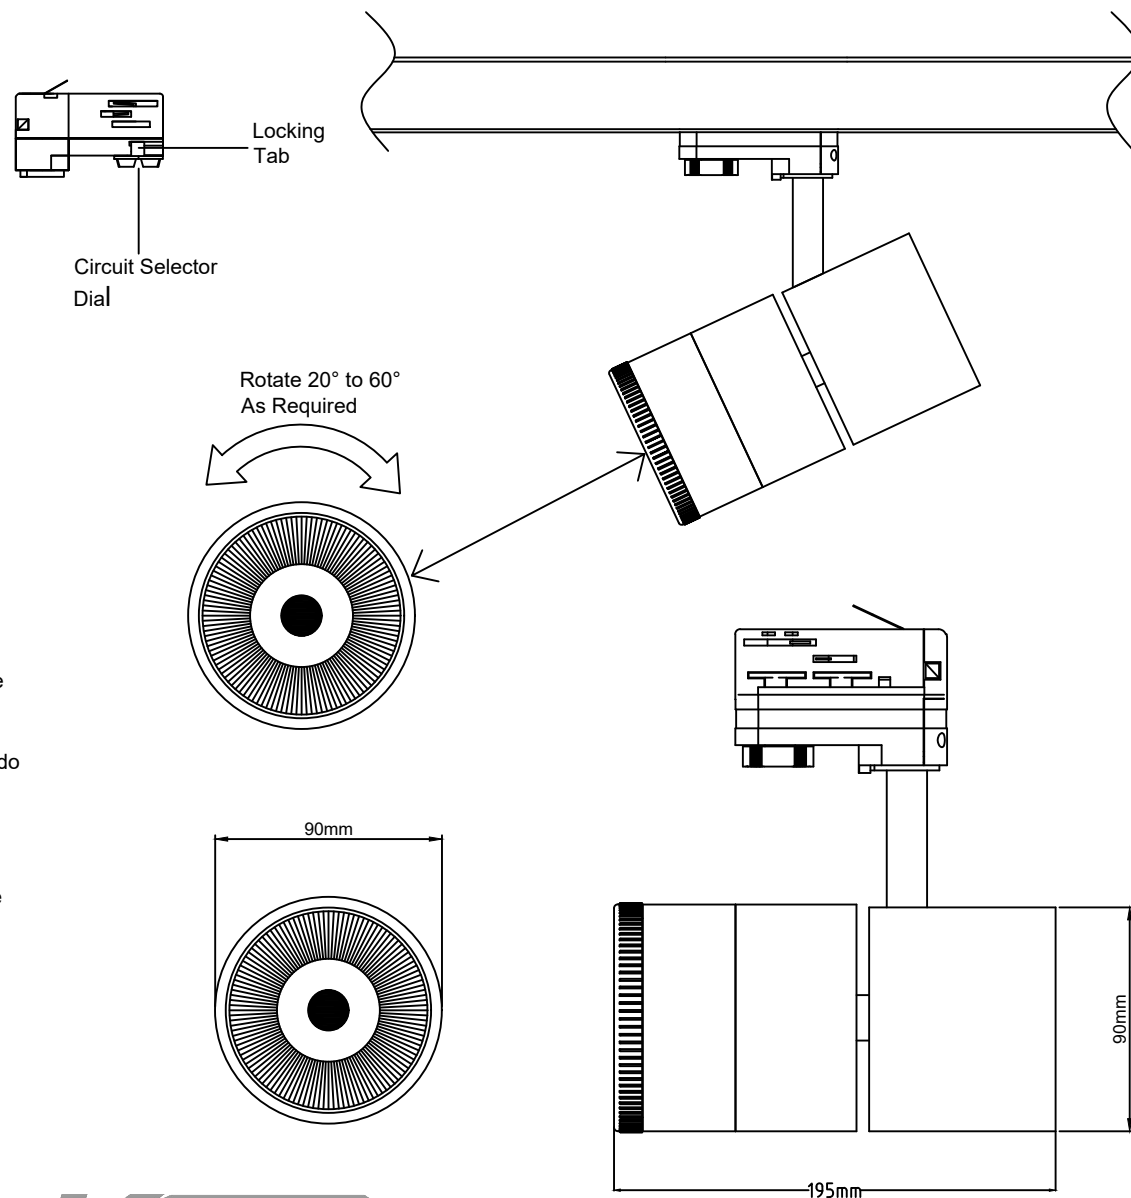

Product Code	Wattage	CCT	Lumens	CRI Ra:
KSR6441	30W	3000k	3230	93
KSR6442	30W	4000k	3540	93

The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced



KSR Lighting Aftersales: 023 92 674343  
E-mail: [aftersales@ksrlighting.com](mailto:aftersales@ksrlighting.com)