



Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

Available Finishes: Anthracite (KSR7108/7109/7112) , Silver (KSR7100/7101)  
Rusty Brown (KSR7177/7178)

IP55 240VAC~50Hz 50W Max.

These fittings are Class I and must be Earthed

**Important Information**

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply.

Any faulty, broken or damaged luminaires should be replaced immediately.

KSR will not accept responsibility for any claims arising from a poor installation.

Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

**Important User Advice**

Always switch off mains supply before servicing.

KSR recommend greasing all threaded parts and cleaning the body every 3 months minimum.

At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

**Installation Procedure**

Familiarize yourself with the luminaire/installation procedure and ensure the power is safely isolated before installing the luminaire.

Remove the four retaining screws from the base of the wall light holding the back plate to the fitting.



Dress the supply cable through the supplied blank grommet, making sure that a watertight seal is maintained around the cable. Secure the back plate to a suitable surface. Ensuring the cable entry is at the bottom with the wiring terminals at the top as per Fig.1.

Wire the mains supply to the terminal block following the marking on the base and/or the guide in Fig.2 as below.



Place the fitting back on to the base plate and secure with the four fixings, cover the screw heads with the 4 coloured caps provided.

Install suitable lamp(s), turn on the power and test.



Note: do not over tighten the glass lenses when installing the lamp as this may distort the seals and cause moisture ingress.



KSR7112



KSR7101/09/78



KSR7100/08/77

Fig.1

**Base Plate**





Fig.2



**Lamp Details**

Lamp Cap: GU10  
Max Wattage: 50W

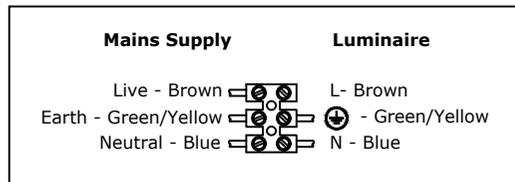

Suitable for Retrofit LED Lamps

