



Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP44 240VAC~50Hz 100W Max.

These fittings are Class I and must be Earthed

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply.

Any faulty, broken or damaged luminaires should be replaced immediately.

KSR will not accept responsibility for any claims arising from a poor installation.

Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always switch off mains supply before servicing, fitting or replacing lamps.

KSR recommends a maintenance schedule of washing down with soapy water (no abrasive cleaners) and greasing all nut/bolts every 3 months

At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

Installation Procedure

Familiarize yourself with the luminaire/installation procedure and ensure the power is safely isolated before installing the luminaire.


Wall Lanterns

- Fix plastic plate to wall using supplied rawl plugs and screws provided.
- Connect supply leads with terminal block: Brown (L), Blue (N) and Green/Yellow (Earth). As below.
- Insert the terminal block on the plastic back plate.
- Attach lantern to plastic plate.
- Fix Glass panels using clips and screws.
- Fit suitable lamp not exceeding wattage specified on the lanterns label.
- Switch on supply and test.

Pillar / Mini Post Lantern


- Connect supply leads with terminal block: Brown (L), Blue (N) and Green/Yellow (Earth). As below.
- Attach lantern to solid base.
- Fix Glass panels using clips and screws.
- Fit suitable lamp not exceeding wattage specified on the lanterns label.
- Switch on supply and test.

Available Finish: Black

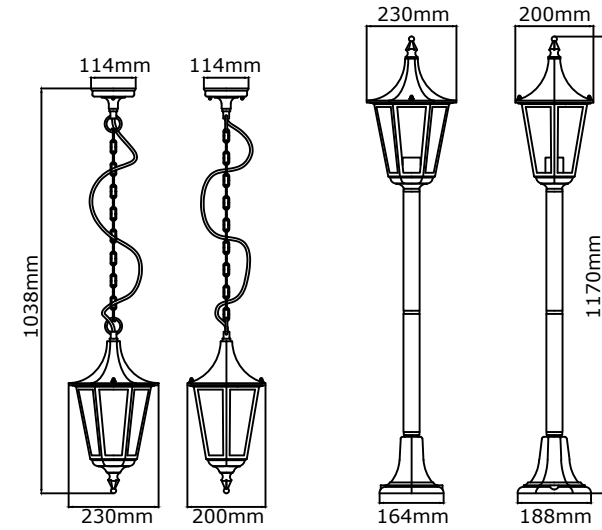

KSR9962

KSR9964

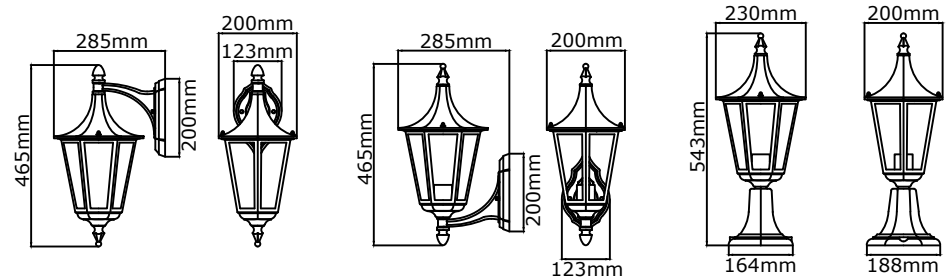


KSR9960

KSR9961

KSR9963


Lamp Details

Lamp Cap: E27
Max Wattage: 100W max.



Suitable for Retrofit LED Lamps

KSR Lighting recommend only branded lamps
For example: Sylvania, GE, Philips or Osram

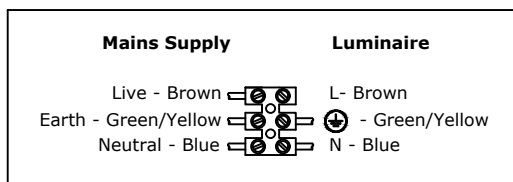



Available Finish: Black

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP44 240VAC~50Hz 100W Max.

These fittings are Class I and must be Earthed

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply. Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice




Always switch off mains supply before servicing, fitting or replacing lamps. KSR recommends a maintenance schedule of washing down with soapy water (no abrasive cleaners) and greasing all nut/bolts every 3 months. At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

Installation Procedure

Familiarize yourself with the luminaire/installation procedure and ensure the power is safely isolated before installing the luminaire.

Street Post Lantern


- Isolate mains supply.
- Use supplied concrete kit placed in wet concrete (Fig.1).
- Fix middle post to base using 6 screws provided.
- Fit and secure cover plate with securing screw.
- Run cable from the head down the middle post to the base.
- Fix head to post using grub screws.
- Insert glass panels into head using fixing plates and screws.
- Fix top on to post head.
- Terminate the cable from the head in to the terminal block in the base: Brown (L), Blue (N) and Green/Yellow (Earth). As below.
- Connect the mains supply leads with terminal block: Brown (L), Blue (N) and Green/Yellow (Earth).
- Attach street post to concrete kit using washers and nuts supplied (do not over tighten) (Fig.2).
- Fit suitable lamp not exceeding wattage specified on the lanterns label.
- Switch on mains supply and test.

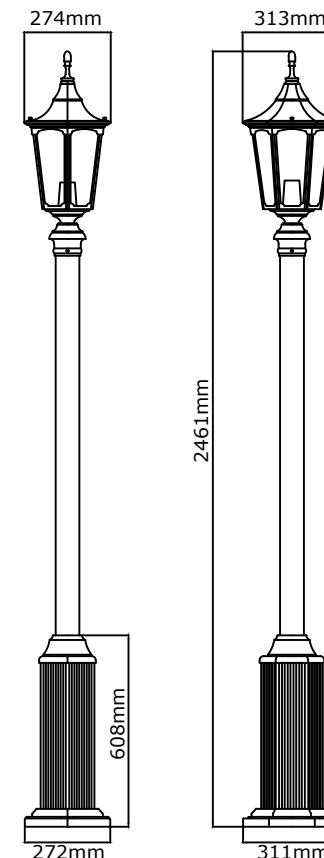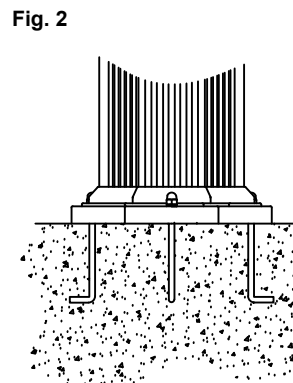

KSR9965

Lamp Details

Lamp Cap: E27
Max Wattage: 100W max.



Suitable for Retrofit LED Lamps

KSR Lighting recommend only branded lamps
For example: Sylvania, GE, Philips or Osram

