



La Linea Office Pendant Range

Commercial Lighting



Data Sheet

Product Information

The La Linea **Office Pendant Range** is perfect for the **office environment** as well as numerous other applications. With optional accessories to **create** a wide **range of lighting layouts** including 'L', 'T' & 'X' connectors and a plug & play kit that provides **indirect lighting**. Each fitting is supplied with a joiner to connect 2 luminaires together (multiples can be joined) and a 2-part suspension kit. They are also suitable for direct **ceiling mounting** if required.

Maximum runs per feed:
KSR98250/98251 – 15 pieces
KSR98254/98255 – 10 pieces

KSR98259



KSR98262



KSR98263



Product Features

- 5-year warranty
- Class I
- IP20
- 2 Sizes Available with Selectable Wattages (4ft – 20W or 32W & 5ft – 25W or 42W)
- 3CCT Selectable 3000K, 4000K or 6000K
- Up to 5020 Lumens
- Up to 125 Lumens per Circuit Watt
- Surface or Suspended (1.75M Suspension kit supplied with each fitting)
- Black or White Finish
- Dimmable Options Available
- Emergency Option available
- Plug & Play Back-Lit Kit Available
- Plug & Play Accessories for creating layouts
- Wide 110° beam angle
- L70 – 54,000hrs

Product Specification


Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class 2021	Protection Class
KSR98250	La Linea X4 20W/32W 3CCT LED 4ft Office Pendant Light Black	20W	3000K	2285lm	>80	G	I
			4000K	2395lm			
			6000K	2290lm			
		32W	3000K	3870lm	>80	G	I
			4000K	4005lm			
			6000K	3895lm			
KSR98251	La Linea X4 20W/32W 3CCT LED 4ft Office Pendant Light White	20W	3000K	2285lm	>80	G	I
			4000K	2395lm			
			6000K	2290lm			
		32W	3000K	3870lm	>80	G	I
			4000K	4005lm			
			6000K	3895lm			
KSR98252	La Linea X4 3CCT LED 4ft Back Lit Kit with Black Cable	2.5W	3000K	300lm	>80	E	III
			4000K	300lm			
			6000K	300lm			
KSR98253	La Linea X4 3CCT LED 4ft Back Lit Kit with White Cable	2.5W	3000K	300lm	>80	E	III
			4000K	300lm			
			6000K	300lm			
KSR98254	La Linea X5 25W/42W 3CCT LED 5ft Office Pendant Light Black	25W	3000K	2965lm	>80	G	I
			4000K	3130lm			
			6000K	3015lm			
		42W	3000K	4910lm	>80	G	I
			4000K	5020lm			
			6000K	4925lm			
KSR98255	La Line X5 25W/42W 3CCT LED 5ft Office Pendant Light White	25W	3000K	2965lm	>80	G	I
			4000K	3130lm			
			6000K	3015lm			
		42W	3000K	4910lm	>80	G	I
			4000K	5020lm			
			6000K	4925lm			
KSR98256	La Linea X5 3CCT LED 5ft Back Lit Kit with Black Cable	3W	3000K	350lm	>80	E	III
			4000K	350lm			
			6000K	350lm			
KSR98257	La Linea X5 3CCT LED 5ft Back Lit Kit with White Cable	3W	3000K	350lm	>80	E	III
			4000K	350lm			
			6000K	350lm			
KSR98259	La Linea L Connector Black	2W	3-6000K	240lm	>80	E	III
KSR98260	La Linea L Connector White	2W	3-6000K	240lm	>80	E	III
KSR98261	La Linea T Connector Black	2W	3-6000K	240lm	>80	E	III
KSR98262	La Linea T Connector White	2W	3-6000K	240lm	>80	E	III
KSR98263	La Linea X Connector Black	2W	3-6000K	240lm	>80	E	III
KSR98264	La Linea X Connector White	2W	3-6000K	240lm	>80	E	III

Technical Data	La Linea 4ft 20W	La Linea 4ft 32W	La Linea 5ft 25W	La Linea 5ft 42W
Nominal voltage	200~240VAC	200~240VAC	200~240VAC	200~240VAC
Operating frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Circuit Wattage	21.64W	32.7W	25.53W	39.92W
Circuit Current	0.107A	0.147A	0.121A	0.175A
Driver Current Rating	300mA	300mA	380mA	380mA
PFC	0.819	0.905	0.856	0.933
In Rush Current	5.02A	9.05A	6.87A	12.45A
Start Time	< 0.5 Sec	< 0.5 Sec	< 0.5 Sec	< 0.5 Sec
Ambient temperature range	0°C to +35°C	0°C to +35°C	0°C to +35°C	0°C to +35°C
IP rating	20	20	20	20


Construction

Body: Aluminium
 Lens: Polycarbonate




Product Dimensions

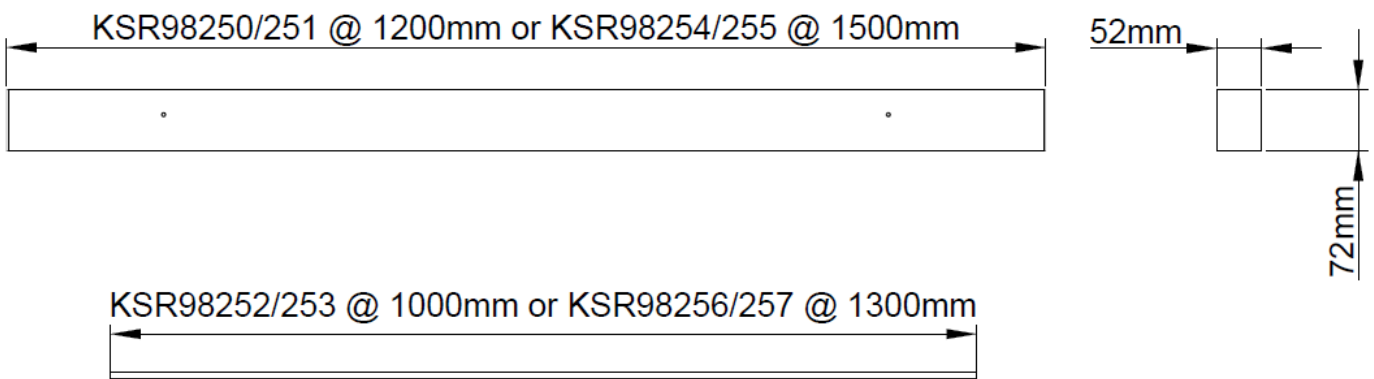

x 2 Supplied.

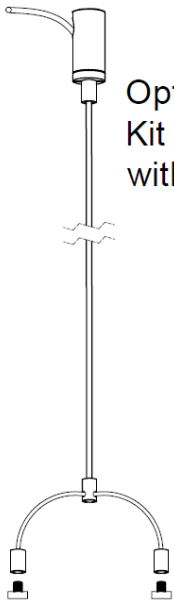

Optional Suspension
Kit (1.75M) Supplied
with each Fitting.

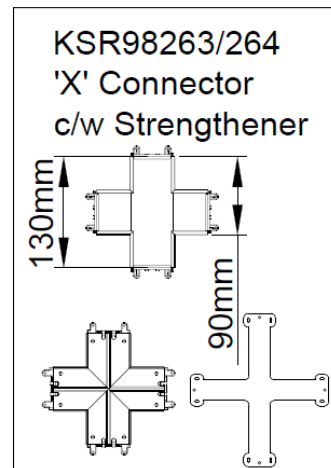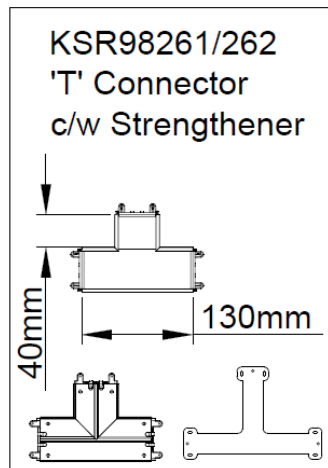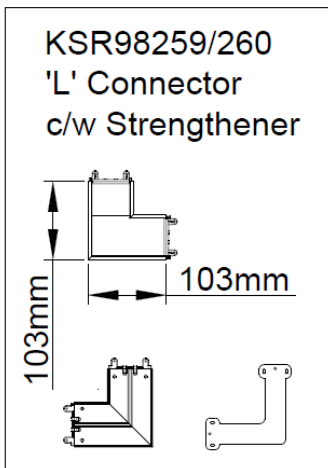

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.