

Mika LED Pendant Range

Commercial



Data Sheet

Product Information

The **Mika** Range of **LED Pendant** Luminaires are perfect for numerous **Domestic and Commercial** applications alike, the higher Lumen versions are perfect for **Retail or Warehouse** Lighting, whereas the lower output versions are ideal as **Counter Display and Table style** lighting. **Adjustable Pendant Lengths** for hanging at different heights. The Range is available as **5 colour options** and **2 wattages**.

Countertop Example using KSR7278



Product Features

- 2 year warranty
- Class I
- IP20
- 9W or 24W LED
- 3000K
- Up to 2150 Lumens
- CRI: Ra82
- 55 Degree Beam Angle
- 5 Colour Options
- Adjustable Cable Length (Max overall 3M)
- Non-Dimmable
- Lighting designers can download photometric data from our website
- L70 - 40,000 hours

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class 2021	Protection Class
KSR7270	Mika 9W 3000K LED Pendant Light White with White Shade	9W	3000K	780lm	82	F	I
KSR7271	Mika 9W 3000K LED Pendant Light White with Transparent Shade	9W	3000K	780lm	82	F	I
KSR7272	Mika 9W 3000K LED Pendant Light Black with Smoke Transparent Shade	9W	3000K	780lm	82	F	I
KSR7273	Mika 9W 3000K LED Pendant Light Black with Black/Gold Shade	9W	3000K	780lm	82	F	I
KSR7274	Mika 9W 3000K LED Pendant Light Aluminium with Transparent Shade	9W	3000K	780lm	82	F	I
KSR7275	Mika 24W 3000K LED Pendant Light White with White Shade	24W	3000K	2150lm	82	F	I
KSR7276	Mika 24W 3000K LED Pendant Light White with Transparent Shade	24W	3000K	2150lm	82	F	I
KSR7277	Mika 24W 3000K LED Pendant Light Black with Smoke Transparent Shade	24W	3000K	2150lm	82	F	I
KSR7278	Mika 24W 3000K LED Pendant Light Black with Black/Gold Shade	24W	3000K	2150lm	82	F	I
KSR7279	Mika 24W 3000K LED Pendant Light Aluminium with Transparent Shade	24W	3000K	2150lm	82	F	I


Nominal voltage	220~240V
Operating frequency	50-60Hz
Ambient temperature range	0°C~+40°C
Start time	< 0.5 sec
Beam angle	55°
IP rating	20

Construction


Body: Extruded Aluminium
Diffuser: Polycarbonate

Product Dimensions

KSR7270-7274

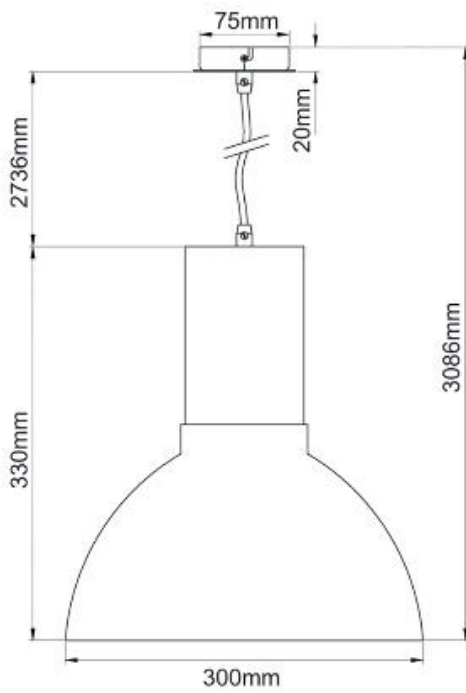

KSR7275-7279

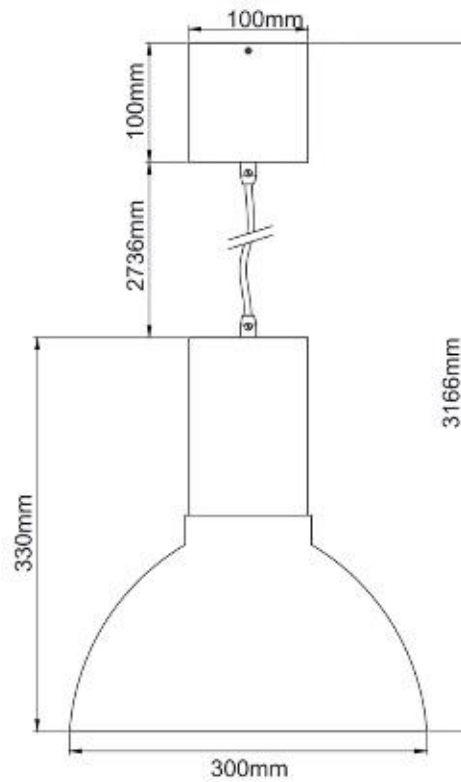

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.