



Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician.

To Match the Remote Control to the KSR9564 Receiver:

Short Press and release the match button on the KSR9564 receiver
Then immediately press the Zone button (1, 2, 3 or 4) on the remote (KSR9565) you wish the receiver / controller to be matched to quickly, 3 times.
To check its working, press the OFF button (middle button below colour wheel) the turn back ON.

If the remote is non-responsive, check the indicator light on the remote (KSR9565) is flashing when the buttons are pressed.

If not, please check the battery tab has been removed (battery installed for factory/ / QC Testing) if still not working please replace the battery.

To check if the White Channel is activated press the White (W) button, if the strip goes off this indicates the White Channel requires activating.
If the RGB Strip turns white and responds normally, this shows that this has been activated at the factory and no further programming is necessary.

To Activate the Mixed White Channel for the 12V RGBW Tape :

Press and hold (Do Not Release) the match button on the KSR9564 receiver until the Run indicator light on the controller does the below sequence :

Flashes 6 times, with the button still held the indicator will flash another 2 times then finally followed by another 3 flashes (11 flashes in total). After this release the match button.

You will then need to re-pair the KSR9564 receiver to the KSR9565 remote as before and as below:


Short Press and release the match button on the KSR9564 receiver
Then immediately press the Zone button (1, 2, 3 or 4) on the remote (KSR9565) you wish the receiver / controller to be matched to quickly, 3 times.
To check its working, press the OFF button (middle button below colour wheel) the turn back ON.

If the remote is non-responsive, check the indicator light on the remote (KSR9565) is flashing when the buttons are pressed.


If not, please check the battery tab has been removed (battery installed for factory/ / QC Testing) if still not working please replace the battery.

To check if the White Channel is activated press the White (W) button, this will stay paired even if the power is disconnected.

KSR9564 - Receiver / Controller

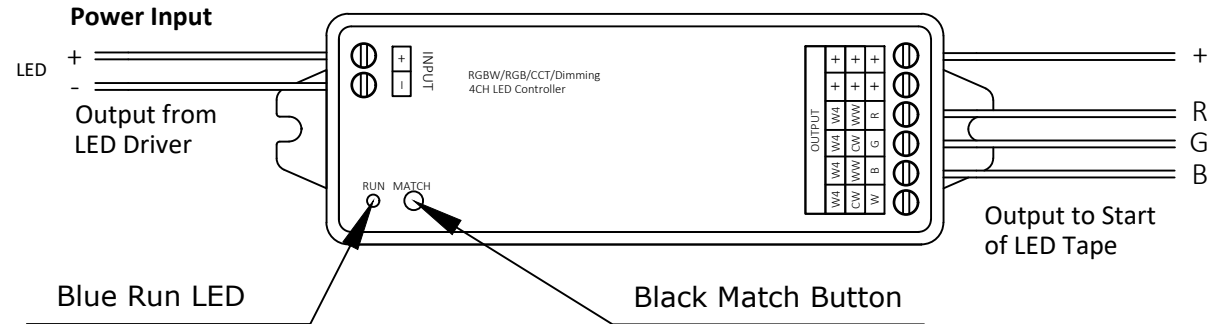

KSR9565 - RGB/RGBW Remote

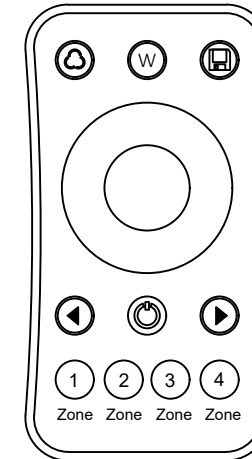

KSR Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com