

Installation Sheet

KSR5407

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

UK CA CE - For use with KSR5400, KSR5400/EM, KSR5405 & KSR5405/EM Only.

IP44 110V~50Hz - 16 Amp Max

Important Information

This accessory is designed to work with our site light luminaires & recommend they are installed and fitted by a qualified electrician ensuring the installation complies with current wiring regulations & local building control. This product is designed for use with our 110V~50Hz site light series (KSR5400, KSR5400/EM & KSR5405 & KSR5405/EM). Prior to installation, carry out the appropriate risk assessment considering the person or people who could be at risk and the precautions required to control the risk. Ensure any circuit supply is isolated either by the circuit supply fuse being removed or the applicable circuit breaker being turned off before installation or maintenance. Any faulty, broken or damaged parts should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, physical abuse as well as failure related to workmanship in the installation of the products or parts.



Important User Advice

Always switch off 110V supply before servicing. This accessory is suitable for indoor or exterior use and will require routine cleaning and more often if used in adverse environments where dust, paint, welding, oils etc are present, Do Not use solvents aggressive detergents, abrasives or similar.

Installation Procedure

Familiarize yourself with the luminaire & accessory installation procedure and ensure the power is safely isolated before installing a luminaire (refer to fitting instructions for luminaire) to this accessory, ensure the tripod is on even and stable ground with the legs set at 950mm centres each apart, see guide to the right, ensuring all parts are sufficiently tightened. Once finished with your temporary installation the tripod folds down into a small & easily maneuverable tripod base accessory.

The tripod is supplied with a carry handle, 1.8 metre Output cable, 5 metre cable and plug for 110V & 2 x Auxiliary Socket which can be used to attach additional 110V Fittings from the KSR Range up to a maximum of 20 can be connected this way.

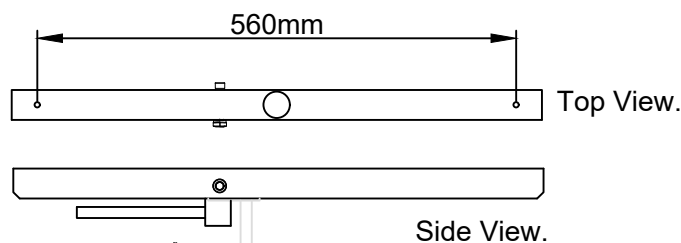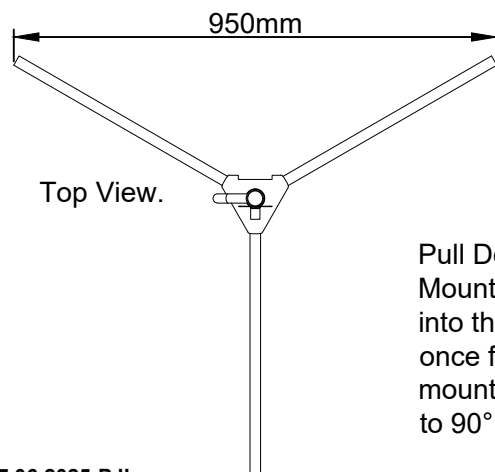

Pull Down - Fitting Mount, can be located into the top of KSR5407, once fixed, the fitting mount can be tilted up to 90°



KSR Lighting Ltd, Optimum House, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex, PO22 9TS.


Site Light Series



Sitio Tripod c/w 2 x 110V Sockets

Available finish:- Yellow Only

Pull Down - Fitting Mount, can be located into the top of KSR5407, once fixed, the fitting mount can be tilted up to 90°

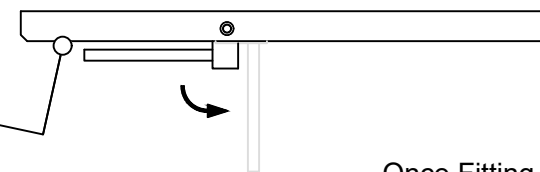

Once Fitting Mount is located in the Tripod aperture, tighten threaded thumb screw sufficiently and angle as required.


1.8 Metre output cable for connection to a 110V 2ft Batten.

2 x Auxiliary Sockets - Can be used to attach additional 110V Fittings - Up to a maximum of 20 can be connected together this way.

Handy carry handle for maneuvering.

Threaded thumb screw - undo for releasing tripod legs and set apart equally at 950mm centres minimum to each leg stand - ensure tightened sufficiently and locked in place.

Supplied with 5 Metre Cable & 16 Amp Plug For connection to 110V Supply.

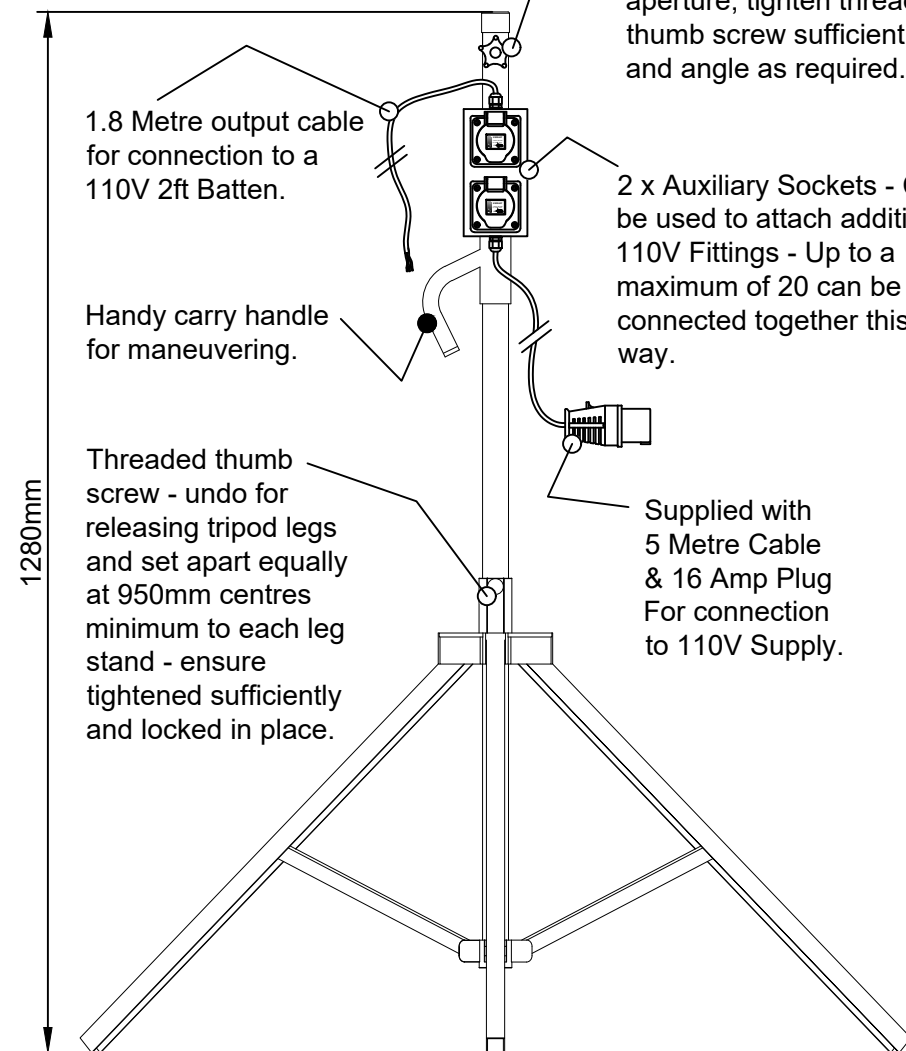

KSR Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com