

Maxima S,M & L Suspended

Commercial Lighting



Data Sheet

Product Information

The **Maxima Dual CCT & *Dual Wattage** (*Medium & *Large versions only) LED pendant fittings are part of a family of **wall** or **suspended circular** fittings available in **3 sizes** and all with **optional decorative rim** attachments in multiple finishes. Colour temperature **selectable for 3000K or 4000K**.

Comes with a 3-year warranty (1 year for the Rims).



Product Features

- 3-year warranty
- Class II
- IP54
- Colour Temperature selectable 3000K or 4000K
- CRI: Ra>82
- 3 Sizes & Outputs to choose from: Small @ 12W, *Medium @ 24W or 30W & *Large @ 30W or 40W
- 2 Metre Suspension Supplied
- Optional Trims
- Multiple Colour Trim options: Black, White, Chrome, Satin Chrome & Matt Gold
- Emergency versions available (Medium & Large only)
- Family of Luminaires – Surface Versions also available
- L70/B10 – 50,000hrs

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)		CRI (Ra)	Protection Class
				Without Rim	With Rim		
KSRSF376	Maxima S 12w Dual CCT LED IP54 Suspended fitting	12W	3000K	1050	780	83	II
			4000K	1110	830		
KSRSF377*	Maxima M 24w Dual CCT LED IP54 Suspended fitting	24W	3000K	2225	1855	83	II
			4000K	2360	1965		
		30W	3000K	2635	2195		
			4000K	2765	2305		
KSRSF378*	Maxima M 24w Dual CCT LED IP54 Suspended fitting Emergency	24W	3000K	2225	1855	83	II
			4000K	2360	1965		
		30W	3000K	2635	2195		
			4000K	2765	2305		
KSRSF379*	Maxima L 30w Dual CCT LED IP54 Suspended fitting	30W	3000K	2875	2395	83	II
			4000K	3045	2535		
		40W	3000K	3675	3065		
			4000K	3905	3255		
KSRSF380*	Maxima L 30w Dual CCT LED IP54 Suspended fitting Emergency	30W	3000K	2875	2395	83	II
			4000K	3905	3255		
		40W	3000K	3675	3065		
			4000K	3905	3255		
Accessories							
KSRSF352	Maxima S White Rim						
KSRSF353	Maxima S Chrome Rim						
KSRSF354	Maxima S Satin Chrome Rim						
KSRSF359	Maxima M White Rim						
KSRSF360	Maxima M Chrome Rim						
KSRSF361	Maxima M Satin Chrome Rim						
KSRSF366	Maxima L White Rim						
KSRSF367	Maxima L Chrome Rim						
KSRSF368	Maxima L Satin Chrome Rim						
KSRSF370	Maxima S Black Rim						
KSRSF371	Maxima S Matt Gold Rim						
KSRSF372	Maxima M Black Rim						
KSRSF373	Maxima M Mat Gold Rim						
KSRSF374	Maxima L Black Rim						
KSRSF375	Maxima L Matt Gold Rim						



Technical Data	Maxima S	Maxima M	Maxima L
Nominal voltage	200~240VAC	200~240VAC	200~240VAC
Operating frequency	50-60Hz	50-60Hz	50-60Hz
Circuit Wattage	12.6w including Driver Losses	24.6w including driver	29.3w including driver
Circuit Current	0.058	0.112	0.133A
Driver Current Rating	200mA	200mA	200mA
PFC	0.92	0.92	0.93
In Rush Current	0.918A Max peak @ 0-40ms	2.813A Max Peak @ 0-40ms	1.981A Max Peak @ 0-40ms
Start Time	< 0.5 Sec	< 0.5 Sec	< 0.5 Sec
Ambient temperature range	0°C to +40°C	0°C to +40°C	0°C to +40°C
IP rating	54	54	54

Construction

Body: Polycarbonate
 Diffuser: PMMA
 Rim: ABS

Product Dimensions

KSRSF376-KSRSF380 - Dimensions

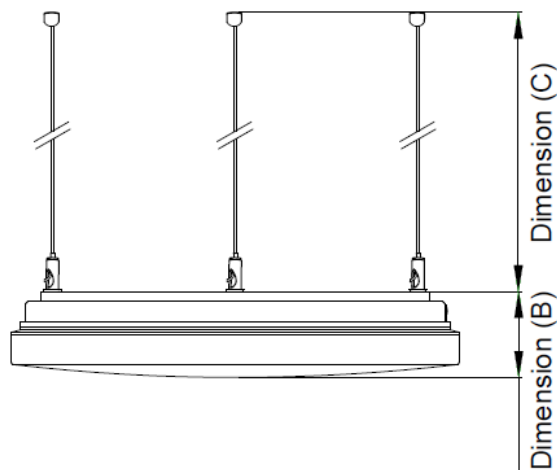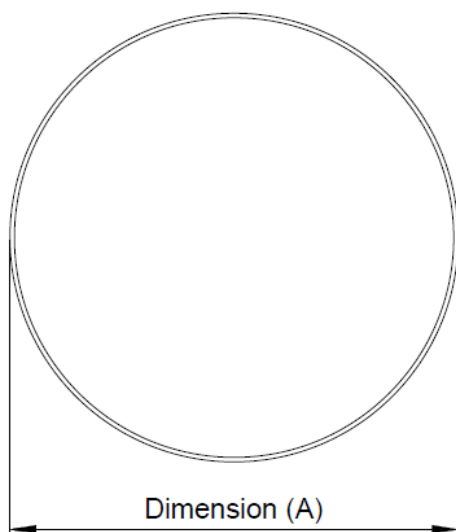

Product Code	Dimensions - A, B & C		
	(A) = Diameter	(B) = Depth	(C) = Suspension
KSRSF376	255mm	76mm	2M Max - Adjustable
KSRSF377	380mm	76mm	2M Max - Adjustable
KSRSF378	380mm	76mm	2M Max - Adjustable
KSRSF379	485mm	76mm	2M Max - Adjustable
KSRSF380	485mm	76mm	2M Max - Adjustable

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.

www.ksrlighting.com