


Installation Sheet

KSR9967



Ricco E27 IP44 - Wall



Traditional - Antique Style Lanterns

Available Finish: Black Only

Read these instructions before commencing installation.
Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP44 240VAC~50Hz 40W Max.

These fittings are Class I and must be Earthed

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply.
Any faulty, broken or damaged luminaires should be replaced immediately.
KSR will not accept responsibility for any claims arising from a poor installation.
Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature, humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always switch off mains supply before servicing, fitting or replacing lamps. Not suitable for High saline or coastal regions. KSR recommends a maintenance schedule of washing down with soapy water (no abrasive cleaners) and greasing all nut/bolts every 3 months. At the end of life the luminaire is classed as WEEE and should be disposed of in accordance with local legislation.

Installation Procedure

Familiarize yourself with the luminaire/installation procedure and ensure the power is safely isolated before installing the luminaire.


Wall Lantern

- Remove the 2 hex nuts on the front of the round plate, to access round plastic fixing plate, fix round plastic fixing plate to wall using rawl plugs, rubber washers (to keep IP Rating) and screws suitable for the substrate.
- Connect supply, round rubberised, cable/s into terminal block: Brown (L), Blue (N) and Green/Yellow (Earth) below as per Fig.1.
- This fitting is suitable for through wiring (loop in / out)
- Reverse step A & Re-attach lantern to plastic wall plate
- Unscrew opal diffuser Glass & fit suitable lamp not exceeding size & wattage specified.
- Re-fit the opal glass removed in step F ensuring the seal is in place and located correctly.
- Switch on supply and test.


Fig.1

Mains Supply	Luminaire
Live - Brown	L- Brown
Earth - Green/Yellow	⊕ - Green/Yellow
Neutral - Blue	N - Blue

Lamp Details	
Lamp Cap: E27	
Maximum Wattage: 40W	
Maximum Lamp size: H140mm x W68mm	
KSR Lighting recommend using branded lamps	

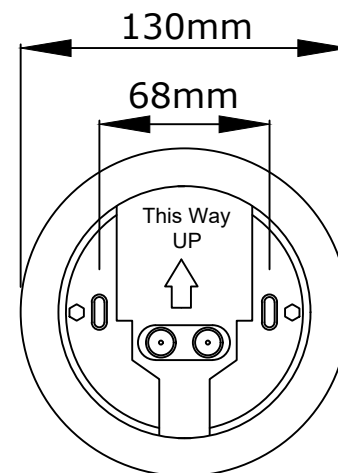

Backplate & Fixing Dimensions.

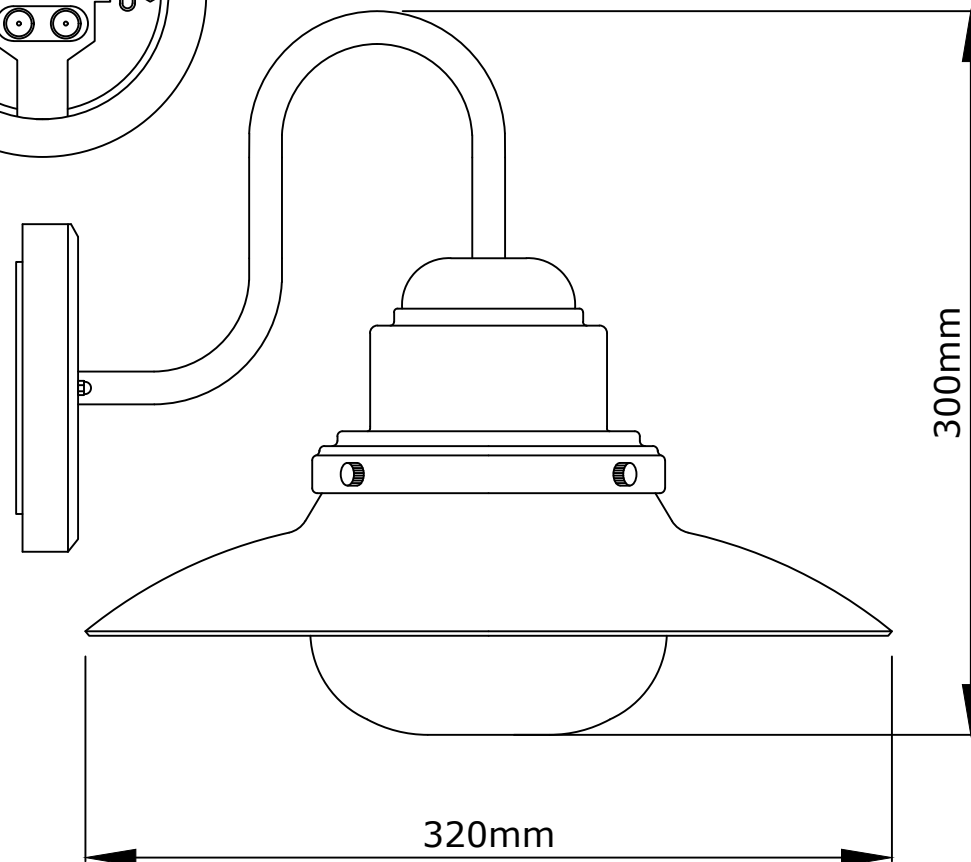

KSR Lighting Aftersales: 023 92 674343

E-mail: aftersales@ksrlighting.com

KSR Lighting Ltd, Optimum House, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex, PO22 9TS.

Drg No.KSR9967-IS-A