

# La Linea UGR Office Pendant Range

*Commercial Lighting*



Data Sheet

## Product Information

The La Linea **UGR Office Pendant Range** is perfect for the **office environment** as well as **numerous other applications**. With optional '**L**' **Connector** accessory to **create** squares, rectangles etc and a plug & play kit that provides **indirect lighting**. Each fitting is supplied with a joiner to **connect 2 luminaires** together (**multiples can be joined**) and a 2-part suspension kit. They are also suitable for direct **ceiling mounting** if required.

Maximum runs per feed:  
KSR98270/98271 – 15 pieces  
KSR98272/98273 – 10 pieces

**KSR98276**



**KSR98277**



## Product Features

- 5-year warranty
- Class I
- IP20
- 2 Sizes Available with Selectable Wattages (4ft – 20W or 32W & 5ft – 25W or 42W)
- 3CCT Selectable 3000K, 4000K or 6000K
- Up to 4500 Lumens
- Up to 113 Lumens per Circuit Watt
- **UGR 19** - Diffuser as Standard
- Surface or Suspended (1.75M Suspension kit supplied with each fitting)
- Black or White Finish Supplied with Silver Reflectors (Black & White reflectors available to order)
- Dimmable Options Available
- Emergency Option available
- Plug & Play Back-Lit Kit Available
- Plug & Play '**L**' Connector Accessory
- 70° beam angle
- L70 – 54,000hrs

# Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class 2021	Protection Class
KSR98270	La Linea UGR X4 20W/32W 3CCT LED 4ft Suspended Pendant Light Black	20W	3000K	2215lm	>82	G	I
			4000K	2275lm			
			6000K	2245lm			
		32W	3000K	3440lm	>82	G	I
			4000K	3450lm			
			6000K	3440lm			
KSR98271	La Linea UGR X4 20W/32W 3CCT LED 4ft Suspended Pendant Light White	20W	3000K	2215lm	>82	G	I
			4000K	2275lm			
			6000K	2245lm			
		32W	3000K	3440lm	>82	G	I
			4000K	3450lm			
			6000K	3440lm			
EM Mode				296lm			
KSR98252	La Linea X4 3CCT LED 4ft Back Lit Kit with Black Cable	2.5W	3000K	300lm	>82	E	III
			4000K	300lm			
			6000K	300lm			
KSR98253	La Linea X4 3CCT LED 4ft Back Lit Kit with White Cable	2.5W	3000K	300lm	>82	E	III
			4000K	300lm			
			6000K	300lm			
KSR98272	La Linea UGR X5 25W/42W 3CCT LED 5ft Suspended Pendant Light Black	25W	3000K	2730lm	>82	G	I
			4000K	2745lm			
			6000K	2735lm			
		42W	3000K	4465lm	>82	G	I
			4000K	4450lm			
			6000K	4500lm			
KSR98273	La Line X5 25W/42W 3CCT LED 5ft Suspended Pendant Light White	25W	3000K	2730lm	>82	G	I
			4000K	2745lm			
			6000K	2735lm			
		42W	3000K	4465lm	>82	G	I
			4000K	4450lm			
			6000K	4500lm			
EM Mode				300lm			
KSR98256	La Linea X5 3CCT LED 5ft Back Lit Kit with Black Cable	3W	3000K	350lm	>82	E	III
			4000K	350lm			
			6000K	350lm			
KSR98257	La Linea X5 3CCT LED 5ft Back Lit Kit with White Cable	3W	3000K	350lm	>82	E	III
			4000K	350lm			
			6000K	350lm			
KSR98274	La Linea UGR ‘L’ Connector Black with Silver Reflector	2W	3-6000K	210lm	>82	E	III
KSR98275	La Linea UGR ‘L’ Connector White with Silver and White Reflector	2W	3-6000K	210lm	>82	E	III
KSR98276	La Linea UGR Black Reflector (1 set)	4’ - sets required 5’ - sets required					
KSR98277	La Linea UGR White Reflector (1 set)						


For Emergency versions please add/ EM after the part code



Technical Data	La Linea 4ft 20W	La Linea 4ft 32W	La Linea 5ft 25W	La Linea 5ft 42W
Nominal voltage	200~240VAC	200~240VAC	200~240VAC	200~240VAC
Operating frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Circuit Wattage	21.64W	32.7W	25.53W	39.92W
Circuit Current	0.107A	0.147A	0.121A	0.175A
Driver Current Rating	300mA	300mA	380mA	380mA
PFC	0.819	0.905	0.856	0.933
In Rush Current	5.02A	9.05A	6.87A	12.45A
Start Time	< 0.5 Sec	< 0.5 Sec	< 0.5 Sec	< 0.5 Sec
Ambient temperature range	0°C to +35°C	0°C to +35°C	0°C to +35°C	0°C to +35°C
IP rating	20	20	20	20

## Construction

Body: Aluminium  
 Lens: Polycarbonate

## Product Dimensions

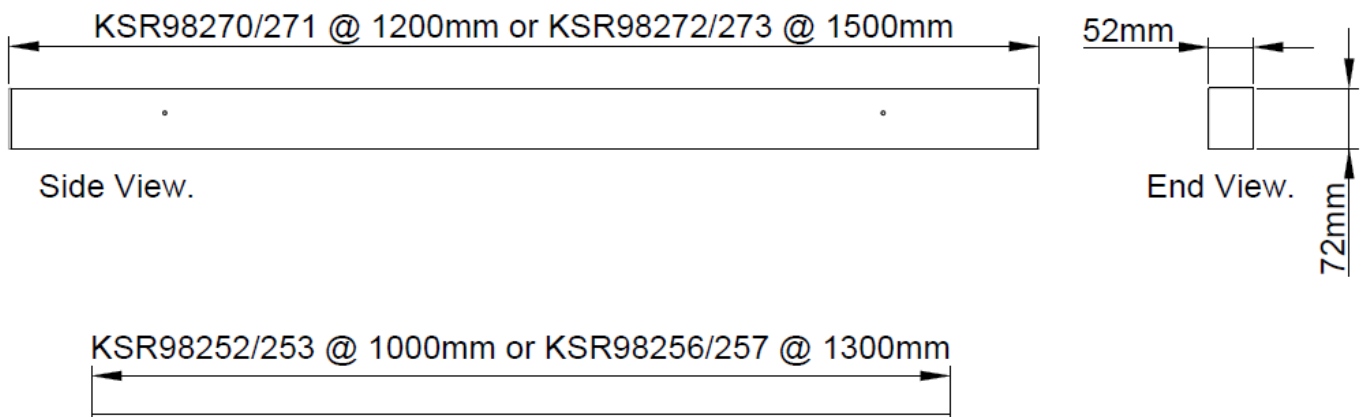

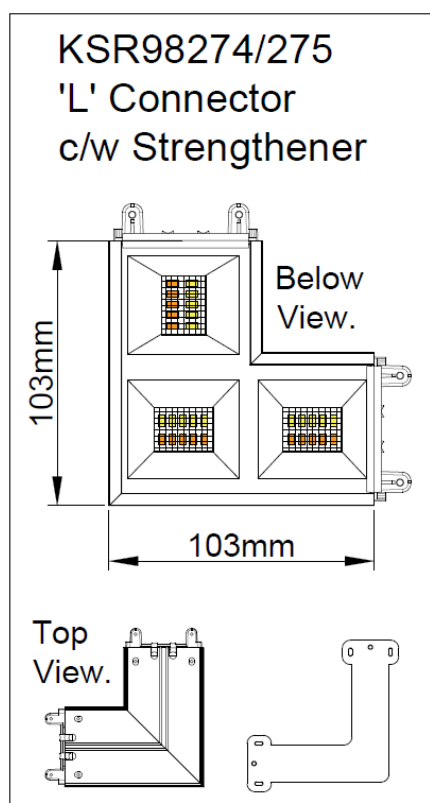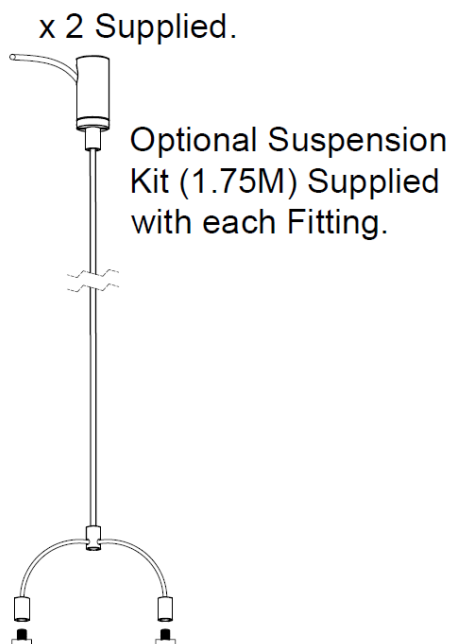

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.