

La Oficina UGR Multi Wattage & 3CCT Linear LED Range

Commercial Lighting



Data Sheet

Product Information

The new **La Oficina UGR Surface / Pendant** fitting by KSR is perfect for office environments as well as numerous other applications. These can be **Surface** mounted or **Suspended** using the **Suspension kit supplied**. With its high-quality, very low glare **UGR19** rated diffuser, when suspended, the design allows you to turn on the integrated **backlight** creating an **indirect light**. Also available as Emergency which is **Non-Self-Test / Self-Test selectable**.

KSR98281



Product Features

- 5-year warranty
- Class I
- IP20
- 3 Sizes with Selectable Wattages Ranging from 27W to 60W
- 3CCT Selectable 3000K, 4000K or 5000K
- **UGR 19** - Diffuser as Standard
- Up to 7510 Lumens
- Up to 127 Lumens per Circuit Watt
- 1.5m Suspension Kit Supplied
- Black or White Finish
- Switchable Backlight for Direct/Indirect when Suspending
- Emergency Option available – Non-Self-Test / Self-Test Selectable
- Dimmable Options Available
- L70 – 36,000hrs

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR98280	La Oficina X4 Multi Wattage 3CCT LED 4ft Linear Light Black	27W	3000K	3335lm	81	E	I
			4000K	3365lm	84		
			5000K	3350lm	80		
		32W	3000K	3875lm	81	E	
			4000K	3945lm	84		
			5000K	3910lm	80		
		37W	3000K	4575lm	81	E	
			4000K	4600lm	84		
			5000K	4580lm	80		
KSR98280/EM	La Oficina X4 Multi Wattage 3CCT LED Emergency 4ft Linear Light Black	27W	3000K	3335lm	81	E	I
			4000K	3365lm	84		
			5000K	3350lm	80		
		32W	3000K	3875lm	81	E	
			4000K	3945lm	84		
			5000K	3910lm	80		
		37W	3000K	4575lm	81	E	
			4000K	4600lm	84		
			5000K	4580lm	80		
EM Mode				180lm			
KSR98281	La Oficina X4 Multi Wattage 3CCT LED 4ft Linear Light White	27W	3000K	3335lm	81	E	I
			4000K	3365lm	84		
			5000K	3350lm	80		
		32W	3000K	3875lm	81	E	
			4000K	3945lm	84		
			5000K	3910lm	80		
		37W	3000K	4575lm	81	E	
			4000K	4600lm	84		
			5000K	4580lm	80		
KSR98281/EM	La Oficina X4 Multi Wattage 3CCT LED Emergency 4ft Linear Light White	27W	3000K	3335lm	81	E	I
			4000K	3365lm	84		
			5000K	3350lm	80		
		32W	3000K	3875lm	81	E	
			4000K	3945lm	84		
			5000K	3910lm	80		
		37W	3000K	4575lm	81	E	
			4000K	4600lm	84		
			5000K	4580lm	80		
EM Mode				180lm			
KSR98282	La Oficina X5 Multi Wattage 3CCT LED 5ft Linear Light Black	39W	3000K	4760lm	81	E	I
			4000K	4790lm	84		
			5000K	4770lm	80		
		47W	3000K	5755lm	81	E	
			4000K	5785lm	83		
			5000K	5765lm	80		
		55W	3000K	6745lm	81	E	
			4000K	6770lm	83		
			5000K	6755lm	80		
KSR98282/EM	La Oficina X5 Multi Wattage 3CCT LED Emergency 5ft Linear Light Black	39W	3000K	4760lm	81	E	I
			4000K	4790lm	84		
			5000K	4770lm	80		
		47W	3000K	5755lm	81	E	
			4000K	5785lm	83		
			5000K	5765lm	80		
		55W	3000K	6745lm	81	E	
			4000K	6770lm	83		
			5000K	6755lm	80		
EM Mode				186lm			

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR98283	La Oficina X5 Multi Wattage 3CCT LED 5ft Linear Light White	39W	3000K	4760lm	81	E	I
			4000K	4790lm	84		
			5000K	4770lm	80		
		47W	3000K	5755lm	81	E	
			4000K	5785lm	83		
			5000K	5765lm	80		
		55W	3000K	6745lm	81	E	
			4000K	6770lm	83		
			5000K	6755lm	80		
KSR98283/EM	La Oficina X5 Multi Wattage 3CCT LED Emergency 5ft Linear Light White	39W	3000K	4760lm	81	E	I
			4000K	4790lm	84		
			5000K	4770lm	80		
		47W	3000K	5755lm	81	E	
			4000K	5785lm	83		
			5000K	5765lm	80		
		55W	3000K	6745lm	81	E	
			4000K	6770lm	83		
			5000K	6755lm	80		
EM Mode				186lm			
KSR98284	La Oficina X6 Multi Wattage 3CCT LED 6ft Linear Light Black	44W	3000K	5585lm	81	D	I
			4000K	5600lm	84		
			5000K	5595lm	80		
		52W	3000K	6485lm	81	D	
			4000K	6515lm	84		
			5000K	6505lm	80		
		60W	3000K	7470lm	81	D	
			4000K	7510lm	83		
			5000K	7480lm	80		
KSR98284/EM	La Oficina X6 Multi Wattage 3CCT LED Emergency 6ft Linear Light Black	44W	3000K	5585lm	81	D	I
			4000K	5600lm	84		
			5000K	5595lm	80		
		52W	3000K	6485lm	81	D	
			4000K	6515lm	84		
			5000K	6505lm	80		
		60W	3000K	7470lm	81	D	
			4000K	7510lm	83		
			5000K	7480lm	80		
EM Mode				195lm			
KSR98285	La Oficina X6 Multi Wattage 3CCT LED 6ft Linear Light White	44W	3000K	5585lm	81	D	I
			4000K	5600lm	84		
			5000K	5595lm	80		
		52W	3000K	6485lm	81	D	
			4000K	6515lm	84		
			5000K	6505lm	80		
		60W	3000K	7470lm	81	D	
			4000K	7510lm	83		
			5000K	7480lm	80		
KSR98285/EM	La Oficina X6 Multi Wattage 3CCT LED Emergency 6ft Linear Light White	44W	3000K	5585lm	81	D	I
			4000K	5600lm	84		
			5000K	5595lm	80		
		52W	3000K	6485lm	81	D	
			4000K	6515lm	84		
			5000K	6505lm	80		
		60W	3000K	7470lm	81	D	
			4000K	7510lm	83		
			5000K	7480lm	80		
EM Mode				195lm			

Technical Data	La Oficina 4ft 27W	La Oficina 4ft 32W	La Oficina 4ft 37W
Nominal voltage	230~240VAC	230~240VAC	230~240VAC
Operating frequency	50-60Hz	50-60Hz	50-60Hz
Circuit Wattage	TBC	TBC	TBC
Circuit Current	TBC	TBC	TBC
Driver Current Rating	TBC	TBC	TBC
PFC	TBC	TBC	TBC
In Rush Current	TBC	TBC	TBC
Start Time	< 0.5 Sec	< 0.5 Sec	< 0.5 Sec
Ambient temperature range	0°C to +35°C	0°C to +35°C	0°C to +35°C
IP rating	20	20	20

Technical Data	La Oficina 5ft 39W	La Oficina 5ft 47W	La Oficina 5ft 55W
Nominal voltage	230~240VAC	230~240VAC	230~240VAC
Operating frequency	50-60Hz	50-60Hz	50-60Hz
Circuit Wattage	TBC	TBC	TBC
Circuit Current	TBC	TBC	TBC
Driver Current Rating	TBC	TBC	TBC
PFC	TBC	TBC	TBC
In Rush Current	TBC	TBC	TBC
Start Time	< 0.5 Sec	< 0.5 Sec	< 0.5 Sec
Ambient temperature range	0°C to +35°C	0°C to +35°C	0°C to +35°C
IP rating	20	20	20

Technical Data	La Oficina 6ft 44W	La Oficina 6ft 52W	La Oficina 6ft 60W
Nominal voltage	230~240VAC	230~240VAC	230~240VAC
Operating frequency	50-60Hz	50-60Hz	50-60Hz
Circuit Wattage	TBC	TBC	TBC
Circuit Current	TBC	TBC	TBC
Driver Current Rating	TBC	TBC	TBC
PFC	TBC	TBC	TBC
In Rush Current	TBC	TBC	TBC
Start Time	< 0.5 Sec	< 0.5 Sec	< 0.5 Sec
Ambient temperature range	0°C to +35°C	0°C to +35°C	0°C to +35°C
IP rating	20	20	20



Construction

Body: Aluminium



Diffuser: Polycarbonate

Product Dimensions

KSR98280 - KSR98281

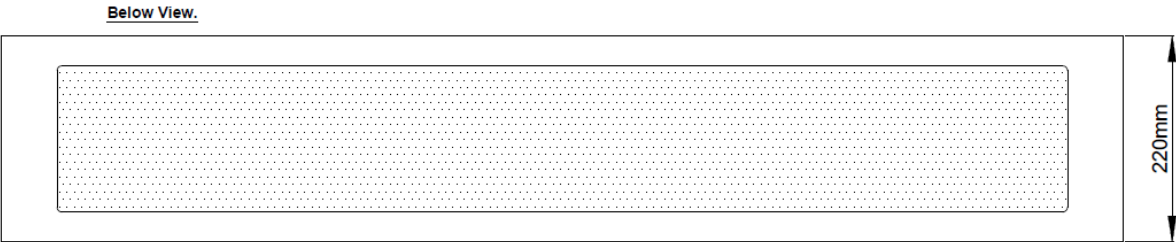

KSR98282 - KSR98283

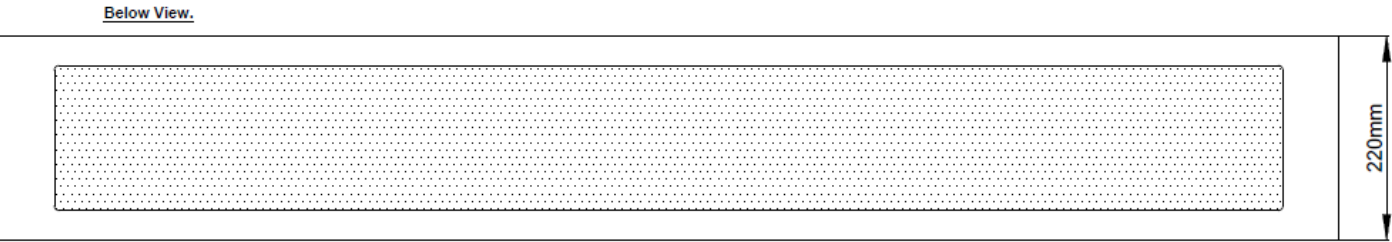

Product Dimensions Cont'd

KSR98284 - KSR98285

Side View

1800mm

4.5mm

Below View

220mm

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.