KSRDL385 - KSRDL387


Sorocco - Dual Wattage & 3CCT Commercial Downlights

This product is suitable for indoor use only


Installation Instructions

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.


1 **Isolate mains supply.**




2 **Separate the LED driver & Q-Lync connector from the fitting head via the twist & lock connection.**

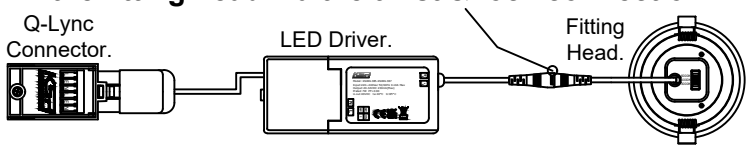

Remove the screw and lift the terminal cover on the Q-Lync connector.




3

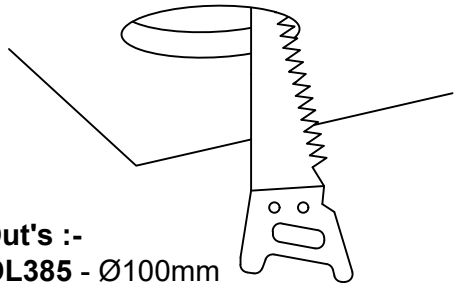


Cut Out's :-
KSRDL385 - Ø100mm
KSRDL386 - Ø150mm
KSRDL387 - Ø205mm

Cut a round hole (see below left for cut outs) in the ceiling (we recommend a sample hole first in some scrap material) ensure sufficient void & without infringing on joists, pipes or cables.


4 **Terminate wiring as shown below (Earth Terminal provided to aid the continuation of the Earth Circuit.) Lift Lever / s insert cable then close lever ensuring cable is located correctly - Loop in / out is possible, ensure strain relief is tightened and cover screwed back in place.**

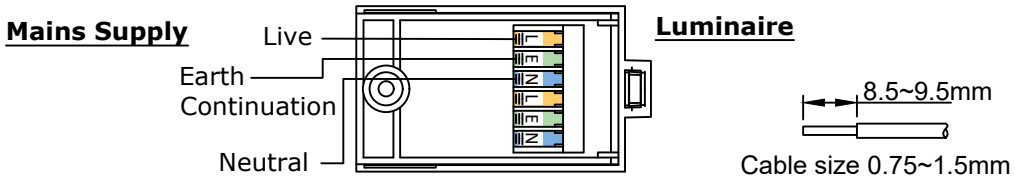

5 **Before placing the LED driver & connector into the ceiling, lift the driver cover to reveal the wattage selection switch, this will be set at the higher wattage (ON), if you need to reduce to the lower wattage please move the dip switch to the 1 position (with power off).**

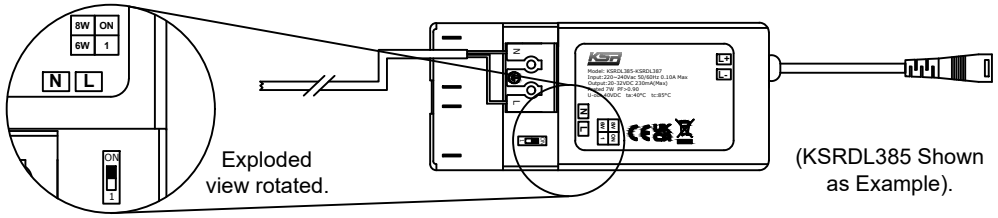


6

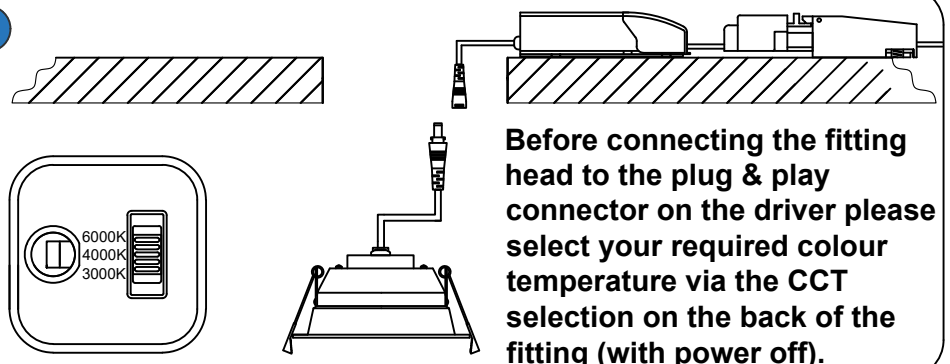


Before connecting the fitting head to the plug & play connector on the driver please select your required colour temperature via the CCT selection on the back of the fitting (with power off).

7

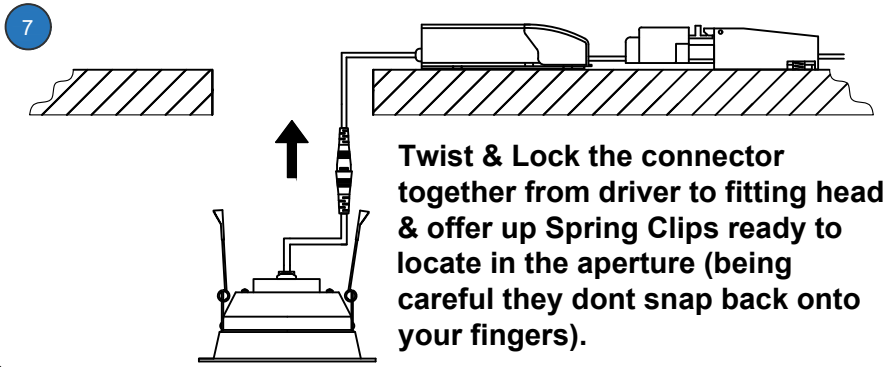

Twist & Lock the connector together from driver to fitting head & offer up Spring Clips ready to locate in the aperture (being careful they dont snap back onto your fingers).

8 **Turn on mains supply and test.**



This product contains a light source of energy efficiency class E

Replaceable Light Source By a Professional

Replaceable Control Gear By a Professional

5 YEARS WARRANTY

Dual Wattage | 6W / 8W | 10W / 15W | 20W / 30W

3000K | 4000K | 6000K

IP44

Important Information

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

Install Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current wiring regulations & local building control.

These products are designed for connection to a 240V~50Hz supply. Any faulty, broken or damaged luminaires should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature 0 ~ +35°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always switch off mains supply before servicing. If this luminaire is suitable for indoor use only it should not be fitted to damp or wet surfaces such as freshly plastered or painted walls or ceilings. Do not use Megger or similar high voltage instruments. Due to the fact LED luminaires contains electronic components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing. To prevent damage to the driver, do not mix with conventional magnetic ballasts on the same electrical circuit.

Please note: Depending on the amount of fittings on a circuit you may have to upgrade the breaker type due to the way electronic LED drivers start up with higher inrush currents compared to halogen lighting. If a dimmable fitting see the recommended dimmers list @ www.ksrlighting.com as well as available LDT Files. For any other questions please call our After Sales on 02392 674343

External Products

All of our external fittings must be installed by a qualified electrician and adhere to the regulations required for the installation. It is also recommended a quarterly cleaning schedule for products to be wiped down with a soft cloth, a petroleum based protective substance similar to WD40 can be used for extra protection against the elements. It is also recommended that all fixings and moving parts are greased prior to installation and again quarterly if required. Do not try to seal any exterior product yourself.

Waste Electrical and Electronic Equipment (W.E.E.E.)

Under the Waste Electrical and Electronic Equipment (WEEE) Regulations, any KSR Lighting product displaying the crossed-out wheeled bin symbol must not be disposed of with general household or commercial waste. KSR Lighting does not charge customers any additional fees for the collection, treatment, recycling, or disposal of WEEE-compliant products. To help protect the environment and human health, end-of-life electrical products should be separated from other waste streams and disposed of through appropriate recycling facilities. Correct disposal enables valuable materials to be recovered and reused while reducing the environmental impact of waste. Customers are encouraged to contact their local authority, recycling centre, or retailer for information on available collection and recycling services in their area. Where a WEEE disposal charge was included by the supplier at the time of purchase, customers should contact that supplier directly regarding any take-back arrangements and the appropriate disposal of the product.

Warranty

All products carry at least a 1 year warranty, some items are 3 years and the majority of the range is 5 years, please go to www.ksrlighting.com for full warranty details - Should a product fail within the warranty period, KSR will repair or replace. KSR will not accept any responsibility for costs associated to the replacement of the product.

KSR Lighting Ltd, Optimum House, Beeding Close,
Southern Cross Trading Estate, Bognor Regis, West
Sussex, PO22 9TS.

Contact KSR After Sales :-
02392 674343
aftersales@ksrlighting.com