







Read these instructions before commencing installation & retain them for future reference.

IP20      0.3m  10w, 30w or 50w LED

### Important Information

It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control. These products are designed for connection to the KSR Escala 3 circuit track system only. Any damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a sub-standard installation.

### Important User Advice


Always switch off mains supply before servicing.  
The ambient temperature where these luminaires are to be used should be below 50°C. This product is designed to be used indoors only.

### Installation Procedure


Familiarise yourself with the way the luminaire connector connects to track. See Fig.1 Please note the lever needs to be in this position to fit track. Move the lever clockwise as show in Fig.2 locking fitting to track. Then turn dial to select required circuit. See Fig.3 for dial positions. Adjust beam aim by turning and tilting head of luminaire. Turn on the mains supply and ensure the luminaire is working correctly.




Available Finishes: White or Black

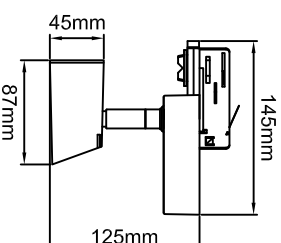

KSR6435 & KSR6437

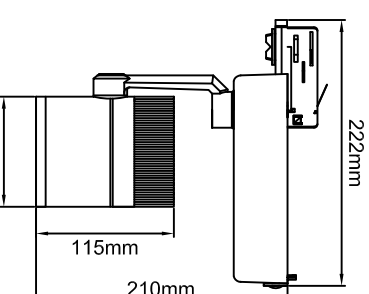

KSR6445

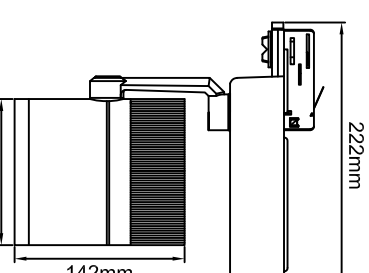

KSR6446

Product Code	Wattage	Colour	Beam Angle	CRI	Lumen Output
KSR6435	10w	3000K	38°	90	650
KSR6436	10w	5000K	38°	80	800
KSR6445	30w	4000K	40°	90	1900
KSR6446	50w	4000K	40°	90	3200

Fig. 1




Fig. 2









Fig. 3



Product Information

KSR Lighting After-sales: 023 92 674343  
E-mail: [info@ksr-lighting.co.uk](mailto:info@ksr-lighting.co.uk)