

# Silvi LED Down + Up & Down IP65 Wall Lights

*Exterior Bulkheads*



Data Sheet

## Product Information

Introducing the **KSR Silvi** IP65 Wall Light Range. A perfect blend of **sleek & modern** in a **black finish**. This Wall Light is ideal for **domestic, residential or commercial** applications & suitable for **internal** or **external**. Available in 2 styles **One-way** versions (KSR99140 & KSR99141) or **Up & Down** versions (KSR99142 or KSR99143), both available in 3000K or 4000K.

## Product Features

- 3-year warranty
- Class I
- IP65
- 20W LED (KSR99140-KSR99141) or 40W LED (KSR99142-KSR99143)
- Up to 2200 Lumens
- 3000K or 4000K Versions
- Up or Down Light (KSR99140-KSR99141) + Up & Down Light (KSR99142-KSR99143)
- Die Cast Aluminium Construction
- Black Finish
- Suitable for Internal & External Applications
- Not suitable for coastal or High Saline areas
- L70 – 50,000hrs

## Product Specification

[www.ksrlighting.com](http://www.ksrlighting.com)

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens	CRI (Ra)	Protection Class	Energy Efficiency Class 2021
KSR99140	Silvi 20W 3000K LED Wall Down Light IP65 Black	20W	3000K	1155lm	>80	I	G
KSR99141	Silvi 20W 4000K LED Wall Down Light IP65 Black	20W	4000K	1250lm	>80	I	G
KSR99142	Silvi 40W 3000K LED Wall Up / Down Light IP65 Black	40W	3000K	2040lm	>80	I	G
KSR99143	Silvi 40W 4000K LED Wall Up / Down Light IP65 Black	40W	4000K	2200lm	>80	I	G

Technical Data	20W Down Version
Nominal voltage	220~240VAC
Operating frequency	50-60Hz
Circuit Wattage	TBC
Circuit Current	TBC
PFC	TBC
In Rush	TBC
Ambient temperature range	0°C to +30°C
IK Rating	TBC
IP Rating	65

Technical Data	40W Up & Down Version
Nominal voltage	220~240VAC
Operating frequency	50-60Hz
Circuit Wattage	TBC
Circuit Current	TBC
PFC	TBC
In Rush	TBC
Ambient temperature range	0°C to +30°C
IK Rating	TBC
IP Rating	65


## Construction

Body: Die Cast Aluminium  
Diffuser: Polycarbonate


## Product Dimension

### KSR99140-KSR99143 - Dimensions


Front View.

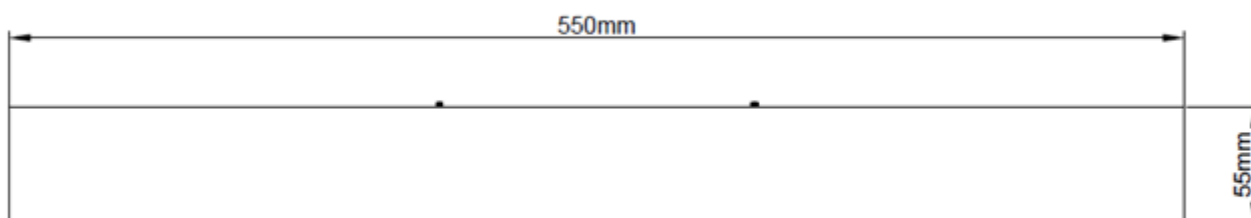


Top or Below View.

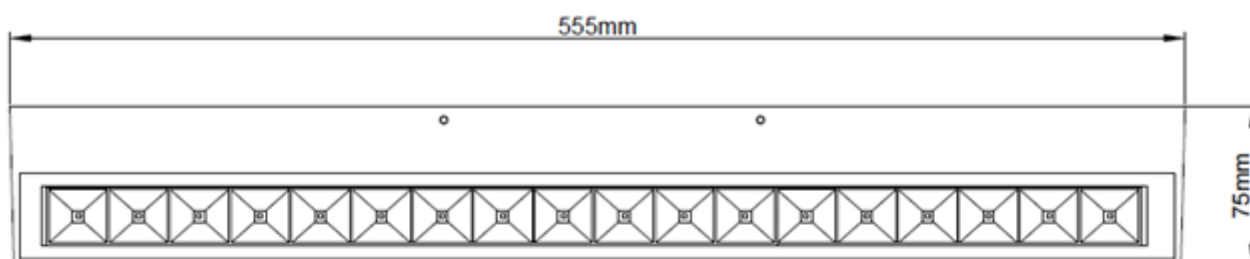

Rear View.

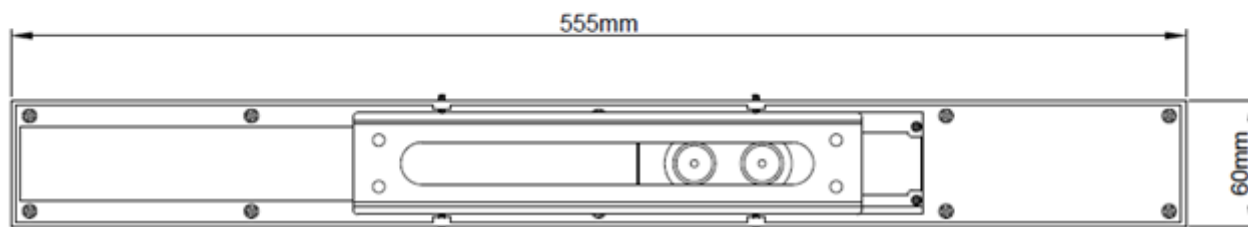

**Back plate & Fixing Dimensions.**

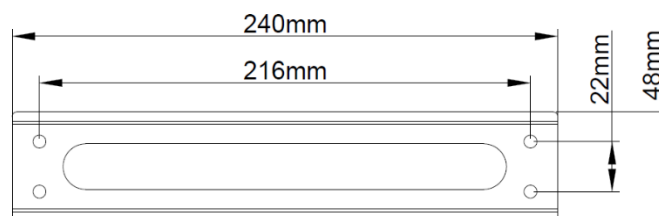

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.