



Available Finishes: KSR1360 - Stainless Steel
KSR1361 - Anthracite

IP44 240V 2x 5W

Important Information

It is recommended that luminaires are installed by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control. These products are designed for connection to a 230-240V mains supply. Any broken or damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.

Important User Advice

Always switch off mains supply before installing/servicing.
A periodic cleaning schedule should be maintained to ensure the life of the finish this is at the customers discretion and location of install (We recommend that you do not install a painted finish in very high saline areas).
Always use a suitable water repellent (grease) on bolts/screws to ensure trouble free maintenance.

Installation Procedure

KSR recommends that you familiarise yourself with the installation. Once you are satisfied:

Make sure the mains supply is turned off.
Remove back plate by slackening off screws (one each side).
Bring cable through grommet on back plate and fix plate in position using suitable fixings for the material being fixed to. Making sure the plate is level.

Fixing centres (Fig. 1)

Connect to mains supply (Fig. 2)

Attach luminaire to back plate and tighten retaining screws.
Turn on mains supply and test luminaire is working correctly.

Note: To keep your luminaire in top condition KSR recommend cleaning with hot soapy water every 2-3 months and re-greasing of bolts to prevent corrosion.

Fig. 2




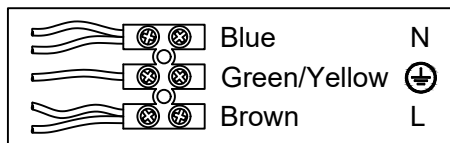


Fig. 1

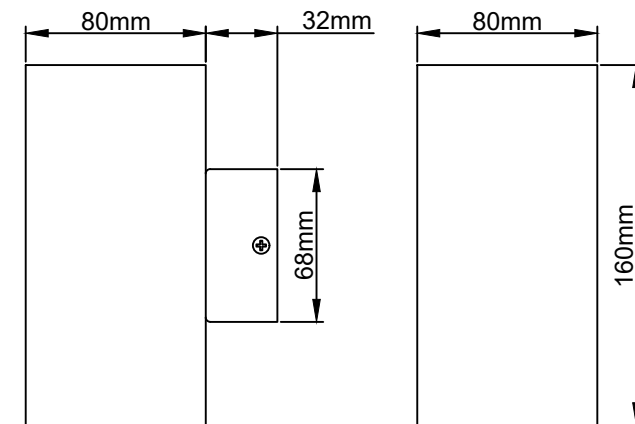

KSR1360

	Body Colour	LED Wattage	LED Colour	Lumens
KSR1360	Stainless Steel	2x 5W	4000K	2x 493.5
KSR1361	Anthracite	2x 5W	4000K	2x 493.5



KSR Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com