

Read these instructions before commencing installation & retain them for future reference.

IP20 0.3m 240V 15W

Important Information



It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to the supplied driver only. Any damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.

Important User Advice



Always switch off mains supply before fitting.

Installation Details

Cut a 145mm round hole in ceiling and ensure adequate minimum ceiling void without infringing on joists, water pipes or electrical cables. Connect the driver to the mains supply (Brown - Live and Blue - Neutral). Wire the LED driver into the Lamp Head and lay the driver in the void in free air space. Fit this product as per the illustration shown in (Fig 1). Do not fit onto new plaster or damp areas. Ensure there is adequate free air ventilation around the fitting. 75mm all around the fitting and 25mm above (Do Not cover driver). Turn on the mains supply to test the luminaire, adjust the head position to illuminate the the required space.

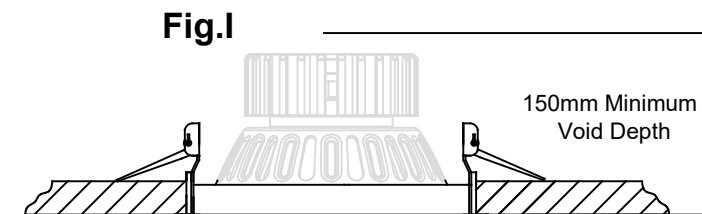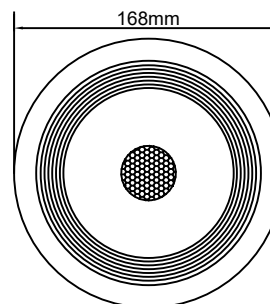

Mains 240v Supply

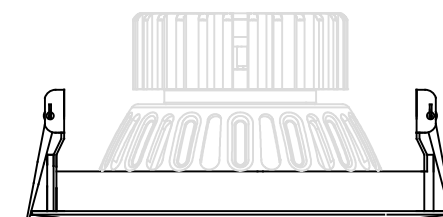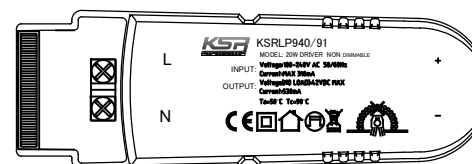

	ØRim Size	Cut out	Void Depth Required	Beam Angle	Dimmable	Lumens
KSRDL243	168mm	145mm	150mm	60°	No	2260

Lamp Details

Lamp: LED
Lamp Type: AR111
Lamp Cap: N/A
Wattage: 15W

