

Read these instructions before commencing installation & retain them for future reference.

**IP20**  **CE 240V 37W**

## Important Information

It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control. Any damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a sub-standard installation.

## Important User Advice

Always switch off mains supply before servicing.

The working ambient temperature should be 5°C ~ 25°C if outside these ranges life span will be effected (reduced).

This product is designed to be used indoors and is IP20.

## Installation Procedure

Ensure that the mains supply is switched off.

KSR recommends that a sample hole is cut in some scrap material to familiarise yourself with the installation. Once you are completely satisfied:

Locate the area(s) suitable to install these luminaires.




Cut a 142mm round hole in the ceiling and ensure sufficient ceiling void without infringing on joists, water pipes or electrical cables.

Connect the mains supply to the LED Driver following the L & N reference points.

Connect your DALI pair to the DALI terminals on the LED Driver.

Place the LED driver into the ceiling void ensuring it is left in free air space and not covered by insulation material. Push the spring clips back and insert luminaire in to the cut-out.

Turn on the mains supply, test and commission the DALI system

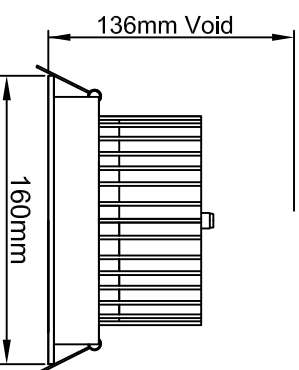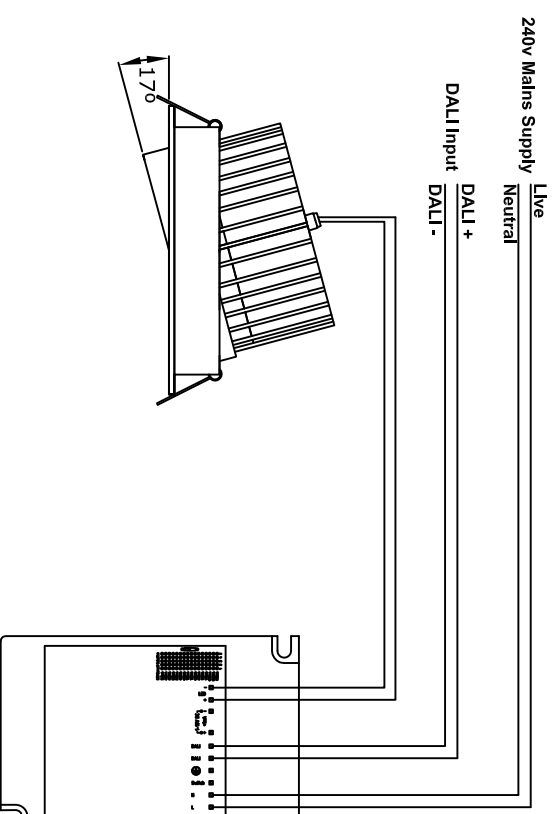

**KSRDL340**



Product Information

### Lamp Details

**Colour:** 4000K  
**Power Consumption:** 37W  
**Lumen Output:** 3300 Lumens  
**CRI:** Ra93  
**Beam Angle:** 60°

KSR Lighting Aftersales: 023 92 674343  
E-mail: [aftersales@ksrlighting.com](mailto:aftersales@ksrlighting.com)