KSR5400

SITIO 2FT 19W 4K LED 110V IP65 ANTI CORROSIVE



The new Site Light Series by KSR is 110V specialised site Lighting which are ideal for domestic, commercial or industrial applications. Designed to work with 110V transformers, this Anti Corrosive batten range is available in 2ft, 4ft or 5ft as standard or available c/w 1 metre cable and IP rated Junction box both versions are also available with 3 Hour Emergency back-up. They have a High IK08 rating and are supplied with 304 Stainless Steel clips. There is also an IP44 Rated 'Plasterers' A Frame with 2 x 110V Power Outlets & an IP44 Rated height adjustable Tripod with 2 x 110V Power Outlets both with 5M cable and plug & designed for the 110V 2ft Anti Corrosive Battens only.

FEATURES & BENEFITS

- 3-year warranty
- 110V Supply Only
- IP65/IP44*
- IK08
- Class I
- 4000K LED
- Up to 6525 Lumens
- CRI: Ra80
- Range of sizes, Single & Twin Versions - 2ft, 4ft & 5ft and Wattages 19W – 50W
- 120° beam angle
- Available c/w 1 Metre Cable & Junction Box
- Emergency Versions Available
- Beza-box mountable via brackets
- Mounting Frames (KSR5407 & KSR5408) with 110V Sockets for the 2ft Versions Available
- L70 – 40,000hrs

PRODUCT SPECIFICATION

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Protection Class
KSR5400	Sitio 2ft 19W 4K LED 110V IP65 Anti Corrosive	19W	4000K	2475lm	>80	I
KSR5400/EM	Sitio 2ft 19W 4K LED 110V IP65 Emergency Anti Corrosive	19W	4000K	2475lm EM Mode - 311lm	>80	I
KSR5402	Sitio 4ft 19W 4K LED 110V IP65 Anti Corrosive	19W	4000K	2480lm	>80	I
KSR5402/EM	Sitio 4ft 19W 4K LED 110V IP65 Emergency Anti Corrosive	19W	4000K	2480lm EM Mode - 330lm	>80	I
KSR5403	Sitio 5ft Single 24W 4K LED 110V IP65 Anti Corrosive	24W	4000K	3145lm	>80	I

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.

SITIO 2FT 19W 4K LED 110V IP65 ANTI CORROSIVE

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Protection Class
KSR5403/EM	Sitio 5ft Single 24W 4K LED 110V IP65 Emergency Anti Corrosive	24W	4000K	3145lm EM Mode - 326lm	>80	I
KSR5404	Sitio 5ft Twin 50W 4K LED 110V IP65 Anti Corrosive	50W	4000K	6525lm	>80	I
KSR5404/EM	Sitio 5ft Twin 50W 4K LED 110V IP65 Emergency Anti Corrosive	50W	4000K	6525lm EM Mode - 319lm	>80	I
KSR5405	Sitio 2ft 19W 4K LED 110V IP65 Anti Corrosive c/w 1M Cable & Junction Box	19W	4000K	2475lm	>80	I
KSR5405/EM	Sitio 2ft 19W 4K LED 110V IP65 Emergency Anti Corrosive c/w 1M Cable & Junction Box	19W	4000K	2475lm EM Mode - 311lm	>80	I
KSR5406	Sitio 5ft Twin 50W 4K LED 110V IP65 Anti Corrosive c/w 1M Cable & Junction Box	50W	4000K	6525lm	>80	I
KSR5406/EM	Sitio 5ft Twin 50W 4K LED 110V IP65 Emergency Anti Corrosive c/w 1M Cable & Junction Box	50W	4000K	6525lm EM Mode - 319lm	>80	I

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.


KSR5400

SITIO 2FT 19W 4K LED 110V IP65 ANTI CORROSIVE

GENERAL INFORMATION

IP Rating	65
Input Voltage (V)	110
IK Rating	8
Class	I
Product Weight (Kg)	1
Length (mm)	650
Width (mm)	105
LED Life Hrs	40000

Warranty (Years)	3
Height (mm)	75
Internal Or External Use	INTERNAL OR EXTERNAL
CRI (Ra)	>80
Box Quantity	1
Colour Finish	yellow
Body (Material)	polycarbonate

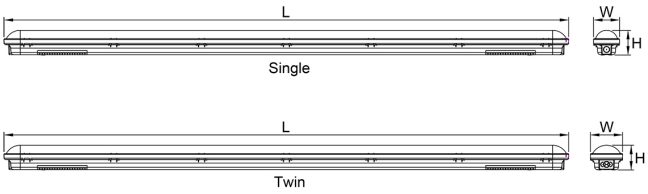

Product Code	Description	Dimensions L x W x H	Wattage	Colour
KSR5400	Sitio 2ft Twin LED 110V IP65 Anti Corrosive	650mm x 105mm x 75mm	19W	4000K
KSR5402	Sitio 4ft Single LED 110V IP65 Anti Corrosive	1180mm x 85mm x 80mm	19W	4000K
KSR5403	Sitio 5ft Single LED 110V IP65 Anti Corrosive	1485mm x 85mm x 80mm	24W	4000K
KSR5404	Sitio 5ft Twin LED 110V IP65 Anti Corrosive	1485mm x105 mm x 80mm	50W	4000K
KSR5405	Sitio 2ft Twin LED 110V IP65 Anti Corrosive c/w 1M Cable & JB	650mm x 105mm x 75mm	19W	4000K
KSR5406	Sitio 5ft Twin LED 110V IP65 Anti Corrosive c/w 1M Cable & JB	1485mm x 105mm x 80mm	50W	4000K

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.