
KSR5431

SITIO 2X15W 6500K 110V LED HAND HELD SITE LIGHT C/WTRIPOD

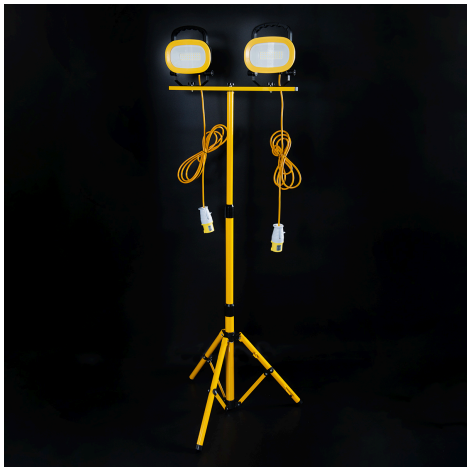

The new Site Light Series by KSR is 110V specialised site Lighting which are ideal for domestic, commercial or industrial site lighting applications. Designed to work with 110V transformers, these fully adjustable handheld work lights are available as a single stand-alone fitting or mounted on the optional height adjustable 620mm 1465mm tripod (KSR5416 ordered separately). Twin headed version complete with mounting bracket & adjustable tripod, both supplied with 3 metre cable and 16A plugs

FEATURES & BENEFITS

- 2-year warranty
- 110V Supply Only
- IP44
- IK08
- 5W Per Head (465 lumens)
- Class II
- 6500K LED
- CRI: Ra80
- 3 Kits available – 6 way & 15 metres, 10 way & 23 metres or 20 way & 43 metres – all interconnectable up to a maximum of 200W load
- Supplied with 16A 2P+E IP44 Plug
- Splitter Cable accessory
- 165° beam angle (per head)
- L70 – 35,000hrs





PRODUCT SPECIFICATION

Product Code	Product Description	Light Source/Lamp Holder	CRI (Ra)	Class	Height (mm)	Width (mm)
KSR5430	Sitio 15W 6500K 110V LED Hand Held Site Light c/w 3M Cable	INTEGRATED LED	>80	I	285	200
KSR5431	Sitio 2x15W 6500K 110V LED Hand Held Site light c/wTripod	INTEGRATED LED	>80	I	1695	550

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.

KSR5431

SITIO 2X15W 6500K 110V LED HAND HELD SITE LIGHT C/WTRIPOD

GENERAL INFORMATION

IP Rating	54
Input Voltage (V)	110
IK Rating	8
Class	I
Product Weight (Kg)	2
Depth (mm)	750
Width (mm)	550
LED Life Hrs	45000

Warranty (Years)	3
Height (mm)	1695
Supplied Cable Length (mm)	3000
Internal Or External Use	INTERNAL OR EXTERNAL
CRI (Ra)	>80
Box Quantity	1
Colour Finish	Black & Yellow
Body (Material)	polycarbonate

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.