

Installation Sheet

KSRDL101

Read these instructions before commencing installation & retain them for future reference.

IP20     240V 50W Max

These Fittings are Class II: Double insulated, No Earth required.

Important Information

It is recommended that luminaires are installed by a qualified electrician
The installation of this product must comply with the current edition of the IEE wiring regulations BS7671.
These products are designed for connection to a 240V 50Hz supply.
Any damaged parts should be replaced as soon as possible.
KSR will not accept responsibility for any claims arising from a poor installation.

Important User Advice

Always switch off mains supply before servicing, fitting or changing lamp. Check the lamp is correct for the application, including its voltage and wattage.
Ensure that the lamp is correctly located in the lampholder. Switch on electricity at mains.

Installation Details

Cut a 72mm round hole in ceiling and ensure adequate minimum ceiling void without infringing on joists, water pipes or electrical cables.
Connect this product to a mains 240V 50Hz supply.

Fit this product as per the illustration shown in (Fig 1). Do not fit onto new plaster or damp areas.
This appliance will be considered Class II, the cabling from connector to lampholder has two thickness of insulation.

Twist & Lock



Recessed Downlight

Available finishes:- White, Chrome & Satin Chrome



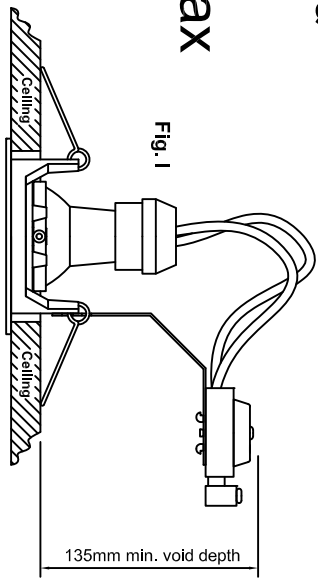



Fig. 1

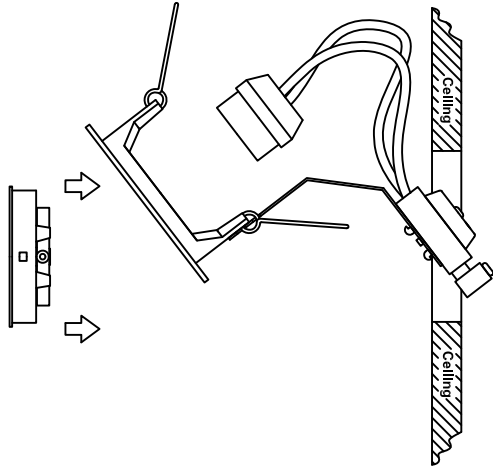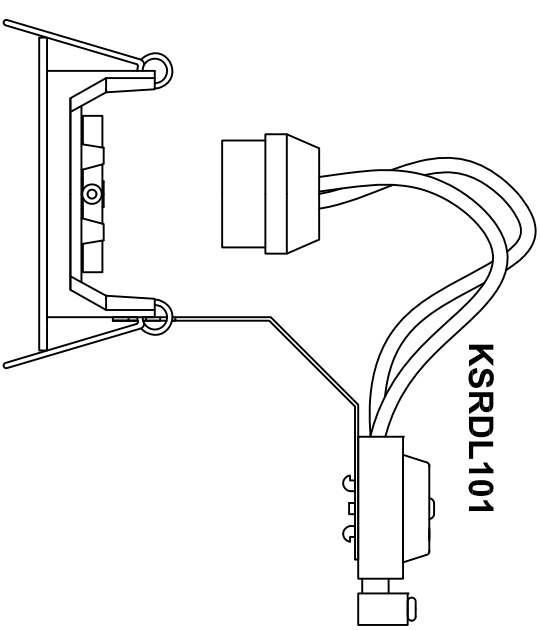

	ØRim Size	ØCut out	Void Depth Req'd	Max Wattage / Lamp Type
KSRDL101	80mm	72mm	135mm	GU10 - 50W

*Ensure there is adequate free air ventilation around fitting.
The nearest illuminated surface must be at least 0.5m distance from the front of the fitting.

Lamp Details	
Lamp Cap: GU10 Max Wattage: 50W	
KSR Lighting recommend only branded lamps For example: Sylvania, GE, Philips or Osram	



Tel: 023 92 674343
E-mail: info@ksr-lighting.co.uk