

# Cody LED Downlight

*Commercial Lighting*



Data Sheet

## Product Information

The Cody LED downlight fittings are perfect for commercial applications where a high powered and high efficiency light source is required. This fitting comes with two output options 30w and 2x24w.

Comes with a 3 year warranty for peace of mind.

## Product Features

- 3 year warranty
- Class I
- IP65
- 3 versions available: ceiling, Wall and up/down
- 36° Reflector
- Complete with low flicker driver
- High efficiency up to 123lumens per watt
- Loop In/Out Facility
- Anodised Die-Cast for coastal regions
- Supplied in an Anthracite Finish
- L70-30,000 hours

# Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR7196	Cody 30w LED Ceiling Light	30	3000	3585	83	A+	I
KSR7197	Cody 30w LED Wall Down Light	30	3000	3585	83	A+	I
KSR7198	Cody 2x24w LED Up & Down Wall Light	2x24	3000	6383	83	A+	I

Technical Data	Cody 30w Ceiling light	Cody 30w LED Wall Downlight	Cody 2x24w Up/Downlight
Nominal voltage	220~240VAC	220~240VAC	220-240VAC
Operating frequency	50-60Hz	50-60Hz	50-60Hz
Circuit Wattage	35.5w including Driver	35.5w including Driver	51.7w including driver
Circuit Current	0.156A	0.156A	0.121A
Driver Current Rating	900mA	900mA	700mA
PFC	0.97	0.97	0.97
In Rush Current	1.016A Max Peak	1.016A Max Peak	1.616A Max peak
Start Time	< 0.5 Sec	< 0.5 Sec	<0.5 Sec
Ambient temperature range	-20°C to +40°C	-20°C to +40°C	-20°C to +40°C
IP rating	65	65	65

## Construction

Body: Cast Aluminium  
Lens: Glass

## Standards


BSEN60598-1:2015      Luminaires – Part 1: General Requirements and tests  
BSEN60598-2-22:2014      Luminaires – Part 2: Luminaires emergency lighting

## In Conformity with


LVD      Low voltage directive 2014/35/EU  
EMC      Electromagnetic compatibility directive 2014/30/EU  
ERP      Energy related products directive 2009/125/EC  
RoHS      Restriction of hazardous substances 2011/65/EU

# Product Dimensions


**KSR7196**

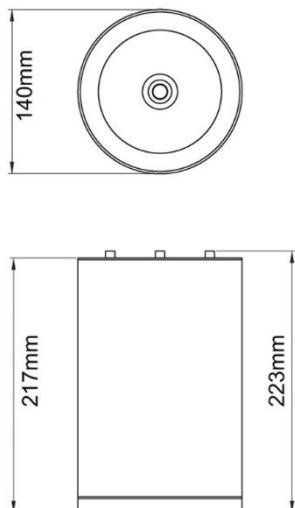

**KSR7197**

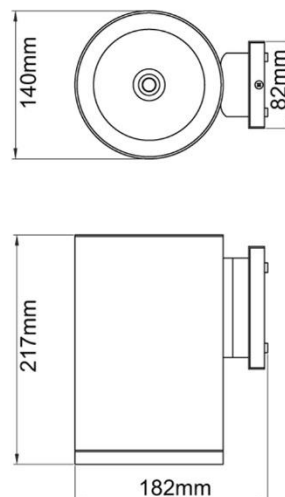

**KSR7198**

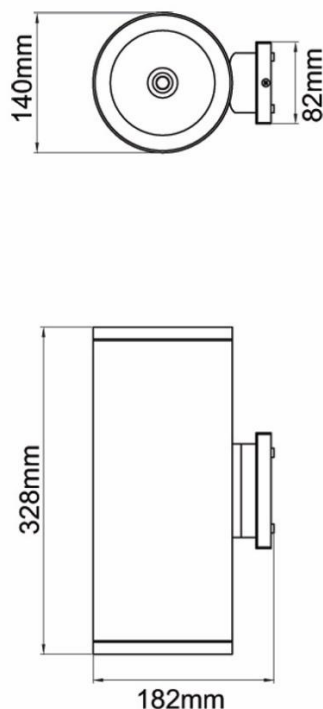

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.