

Sorocco LED Scoop

Commercial Lighting



Data Sheet

Product Information

The Sorocco LED Scoop downlight fittings are perfect for commercial applications where a flexible solution is required. This fitting comes with two output options 23w and 40w.

Comes with a 5 year warranty for peace of mind.



Product Features

- 5 year warranty
- Class II
- IP20
- Instant on
- High CRI up to ra90
- Tridonic branded driver
- Dimmable Options Available
- Emergency Option Available
- High efficiency up to 128lumens per watt
- L70 – 40,000hrs

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Beam Angle	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSRDL382	Sorocco 23w 4000K LED Scoop Downlight White	23	4000	62°	2336	84	D	II
KSRDL383	Sorocco 40w 4000K LED Scoop Downlight White	40	4000	62°	4209	90	D	II

*Available to order with SwitchDim, DALI and DSI Control gear

*For emergency options please add EM to the end of the part code

Technical Data	23w LED Downlight	40w LED Downlight
Nominal voltage	220~240VAC	220~240VAC
Operating frequency	50-60Hz	50-60Hz
Circuit Wattage	23.4w including Driver	40.2w including Driver
Circuit Current	0.108A	0.179A
Driver Current Rating	600mA	1050mA
PFC	0.92	0.96
In Rush Current	0.62A Max Peak	1.09A Max Peak
Start Time	< 0.5 Sec	< 0.5 Sec
Ambient temperature range	-20°C to +30°C	-20°C to +30°C
IP rating	20	20

Construction

Body: Cast Aluminium
Rim: Aluminium

Standards


BSEN60598-1:2021 Luminaires – Part 1: General Requirements and tests
BSEN60598-2-22:2014 + A1 2020 Luminaires – Part 2: Luminaires emergency lighting

In Conformity with


LVD Low voltage directive 2014/35/EU
EMC Electromagnetic compatibility directive 2014/30/EU
ERP Energy related products directive 2019/2020/EU
RoHS Restriction of hazardous substances 2015/863/EU

Product Dimensions

KSRDL382

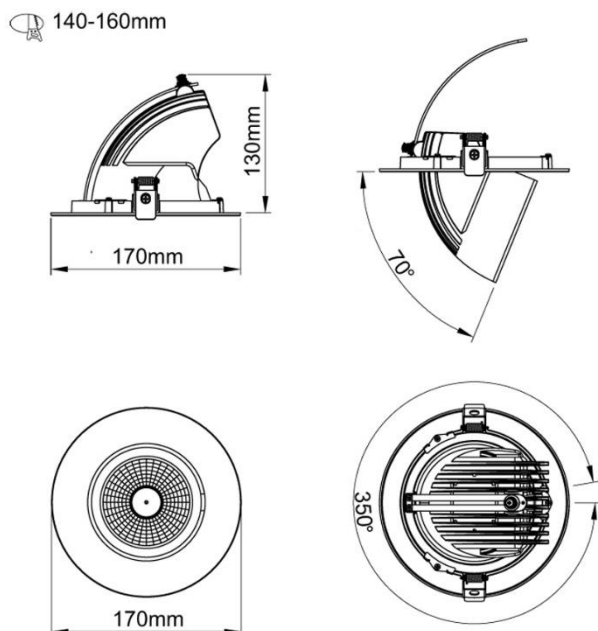

KSRDL383

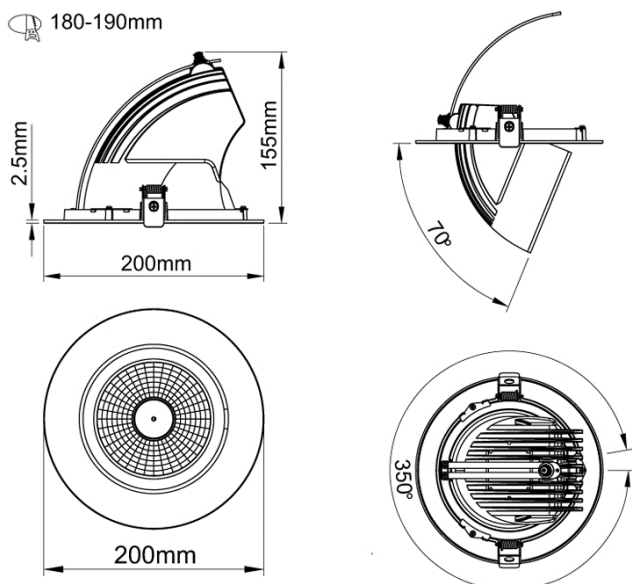

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.