

A111 Scoop & Downlight

Commercial Lighting



Data Sheet

Product Information

The AR111 downlight & Scoop fittings are ideal for Retail and Commercial applications. This fitting can be fitted with Max 75W halogen.

Same Aesthetical look across the downlight and scoop options to maintain the same continuous look throughout your project.

Product Features

- 1 year warranty
- IP20
- Instant on
- 60° Beam angle
- 75° Tilt
- Can be Rotated 350°
- G53 Lampholder Connections
- G53 AR111 75w Max

Product Specification

Product Code	Product Description	Wattage (W)	Protection Class
KSRDL240	AR111 Halogen Scoop Downlight	Max 75w	III
KSRDL241	AR111 Halogen Downlight	Max 75w	III

Nominal voltage	12V DC
Operating frequency	50Hz
Circuit Wattage	Max 75w Halogen
Circuit Current	0.6A @ 75w
PFC	Variable depending on transformer
In Rush Current	Variable depending on transformer
Ambient temperature range	0°C to +30°C (May vary depending on transformer)
IP rating	20

Construction

Body: Cast Aluminium

Standards



BSEN60598-1:2021 Luminaires – Part 1: General Requirements and tests

In Conformity with

LVD Low voltage directive 2014/35/EU
EMC Electromagnetic compatibility directive 2014/30/EU
ERP Energy related products directive 2019/2020/EU
RoHS Restriction of hazardous substances 2015/863/EU



Product Dimensions

174mm

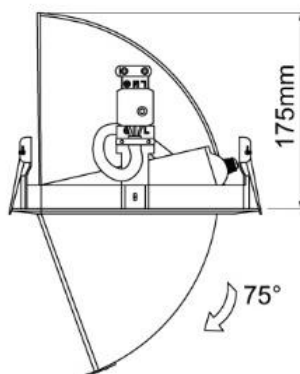

KSRDL225

145mm

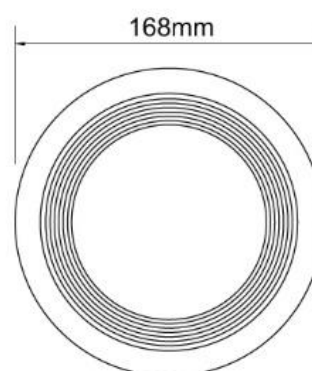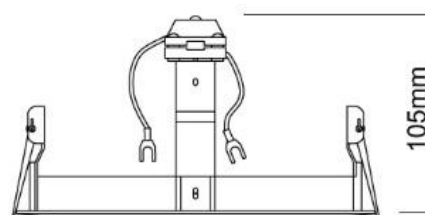

KSRDL230

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.