

# Qr PRO Plate LED

*Downlights*



Data Sheet

## Product Information

The QR Pro LED Plate fittings are ideal for Commercial and Domestic applications. This fitting is available with 2700K, 3000K or 4000K LED modules.

The light plates are available in 4 variants to meet your requirements Single, Twin, Triple and Quad Square plates

Complete with a 3 years warranty for your peace of mind.

## Product Features

- 3 years warranty
- Class II
- IP20
- High efficiency LED technology providing up to 114lm per watt
- 2 reflector options: 15° or 25 °
- 2 output options available: 5W or 10W
- 3 Colour temperatures to Choose From 2700K, 3000K and 4000K
- 3 Rim Options available: Black, White and Aluminium
- 4 versions to choose from: Single, Twin, Triple and Quad Plates
- L70/B10 – 52,000Hrs

# Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency	Protection Class
KSRDL403	Qr Pro 5W & 10W 2700K LED Module	5w or 10w	2700	569 @ 5w 803 @ 10w	84	A+	II
KSRDL404	Qr Pro 5W & 10W 3000K LED Module	5w or 10w	3000	573 @ 5w 862 @ 10w	84	A+	II
KSRDL405	Qr Pro 5W & 10W 4000K LED Module	5w or 10w	4000	618 @ 5w 957 @ 10w	84	A+	II
KSRDL406	Qr Pro 5W & 10W LED Driver for 5W Module	5w				A+	II
KSRDL407	Qr Pro 5W & 10W LED Driver for 10W Module	10w				A+	II
KSRDL440	Qr Pro Single Plate White	5w or 10w					II
KSRDL441	Qr Pro Single Plate Black	5w or 10w					II
KSRDL442	Qr Pro Single Plate Aluminium	5w or 10w					II
KSRDL443	Qr Pro Twin Plate White	5w or 10w					II
KSRDL444	Qr Pro Twin Plate Black	5w or 10w					II
KSRDL445	Qr Pro Twin Plate Aluminium	5w or 10w					II
KSRDL446	Qr Pro Triple Plate White	5w or 10w					II
KSRDL447	Qr Pro Triple Plate Black	5w or 10w					II
KSRDL448	Qr Pro Triple Plate Aluminium	5w or 10w					II
KSRDL449	Qr Pro Quad Plate Aluminium	5w or 10w					II
<b>Optional Lenses</b>							
KSRDL408	Qr Pro 15° Reflector						
KSRDL409	Qr Pro 25° Reflector						

Nominal voltage	220~240VAC
Operating frequency	50/60Hz
Power	50w Max
Ambient temperature range	0°C~+40°C
IP rating	20


## Standards

BSEN60598-1:2021      Luminaires – Part 1: General requirements and tests


## In Conformity with

LVD	Low voltage directive 2014/35/EU
EMC	Electromagnetic compatibility directive 2014/30/EU
ERP	Energy related products directive 2019/2020/EU
RoHS	Restriction of hazardous substances 2015/863/EU


# Product Dimensions




**KSRDL443-445**




**KSRDL440-442**

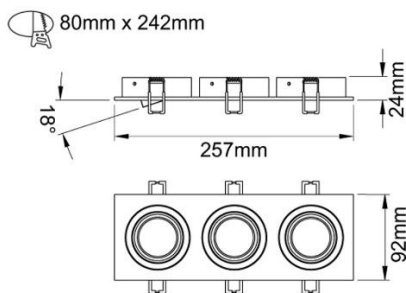


**KSRDL446-448**

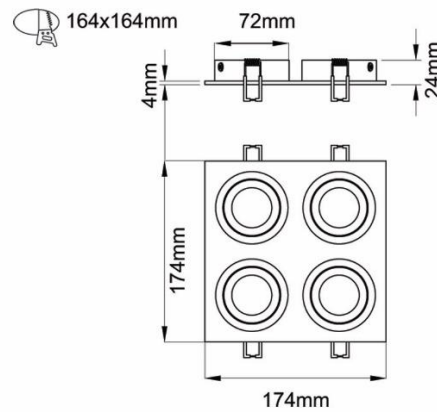


**KSRDL449**



**KSRDL403-405**

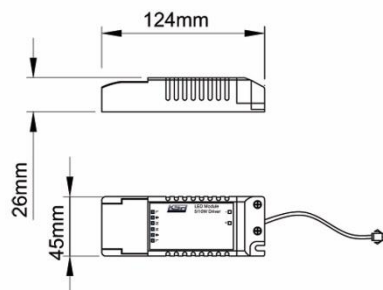

**KSR406-407**



**KSRDL408-409**

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted