

Installation Sheet

KSRL194-198

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP20  240V~50HZ 3W-18W

These fittings are Class II: Double insulated, No Earth required.

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply.

Any faulty, broken or damaged luminaires should be replaced immediately.

KSFR will not accept responsibility for any claims arising from a poor installation.

Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature -10 - 30°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

Important User Advice

Always switch off mains supply before fitting or servicing.

This luminaire is suitable for indoor use only and should not be fitted to damp or wet surfaces such as freshly plastered or painted surfaces.

Do not use Megger or similar high voltage instruments. Due to the fact this luminaire contains electronic

components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing.

To prevent damage to the luminaire, do not mix with conventional magnetic ballasts on the same electrical circuit.

At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.


Installation Procedure

Install as below using the fixing clips provided. The cabinet lights can be mounted to illuminate downward or backward depending on requirements Fig. 1.

Connect to mains supply cable supplied to a suitable junction box, the mains cable can be cut to length as required. Plug the mains cable into the cabinet light, select the colour you require switch on and test. DO NOT SWITCH COLOURS WHILE POWERED ON as this could damage the luminaire.

Fig. 1

Under Cabinet application

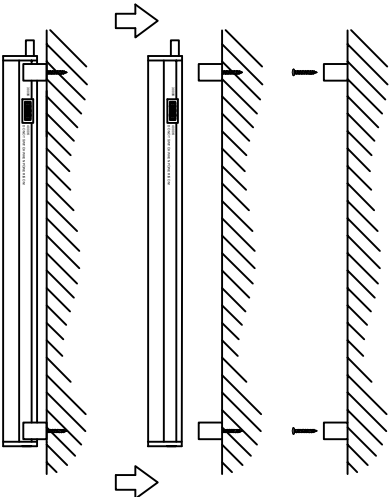


Morini CCT



LED Cabinet Lights

Available finish: White

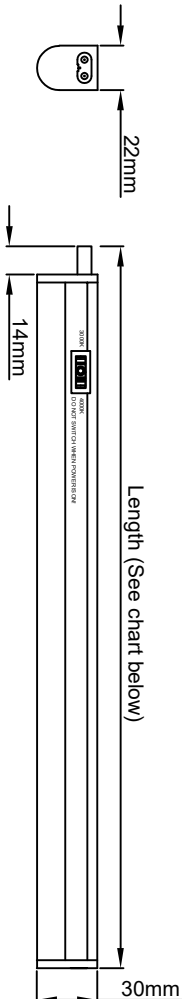

Fittings can be continuously linked to a max of 10 fittings

Direction of supply (One way)



Product Code	Length	Wattage	Lamp Colour	Lumens	Lamp Colour	Lumens
KSRL194	250mm	3W	3000K	320	4000K	330
KSRL195	344mm	4W	3000K	455	4000K	480
KSRL196	571mm	7W	3000K	900	4000K	950
KSRL197	905mm	14W	3000K	1835	4000K	1965
KSRL198	1205mm	18W	3000K	2285	4000K	2375

The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced

KSRL194/95 contains a light source of energy efficiency class E
KSRL196/98 contains a light source of energy efficiency class D



KSRL Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com



KSRL Lighting Ltd, Unit E Hazleton Interchange, Lakesmere Road, Horndean, Hampshire, PO8 9JU