



Vicenza CCT LED

Commercial Lighting



Data Sheet

Product Information

The Vicenza CCT LED is a Triple CCT Exterior Bulkhead luminaire focused on the commercial and industrial sector, this product provides an effective solution for external security and perimeter lighting. Colour temperature selectable for 3000K, 4000K or 6000K.

We have 3 versions in this range standard, emergency and Photocell.

Comes with a 3 year warranty.

Product Features

- 3 year warranty*
- Class I
- IP65
- Colour Temperature selectable 3000K, 4000K and 6000K
- High efficiency LED chip technology delivering up to 120lumens per circuit watt
- CRI: Ra>83
- 3 version to choose from: Standard, Emergency and photocell
- Sleek and Robust Design
- Quick install bracket to assist with installation and maintenance
- Designed to prevent any up light
- L70/B10 – 46,000hrs

*Extended Warranties available upon request

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Protection Class
KSR1185BLK	Vicenza CCT 25w LED Wall Black	25	3000	3040	84	I
			4000	3105	86	
			6000	3060	83	
KSR1185GR	Vicenza CCT 25w LED Wall Grey	25	3000	3040	84	I
			4000	3105	86	
			6000	3060	83	
KSR1186BLK	Vicenza CCT 25w LED Wall complete with Photocell Black	25	3000	3040	84	I
			4000	3105	86	
			6000	3060	83	
KSR1186GR	Vicenza CCT 25w LED Wall complete with Photocell Grey	25	3000	3040	84	I
			4000	3105	86	
			6000	3060	83	
KSR1187BLK	Vicenza CCT 25w LED Wall Black complete with Emergency Black	25	3000	3040	84	I
			4000	3105	86	
			6000	3060	83	
KSR1187GR	Vicenza CCT 25w LED Wall Black complete with Emergency Grey	25	3000	3040	84	I
			4000	3105	86	
			6000	3060	83	
KSR1188BLK	Vicenza CCT 25w LED Wall complete with Photocell and Emergency Black	25	3000	3040	84	I
			4000	3105	86	
			6000	3060	83	
KSR1188BLK	Vicenza CCT 25w LED Wall complete with Photocell and Emergency Grey	25	3000	3040	84	I
			4000	3105	86	
			6000	3060	83	

Technical Data

Nominal voltage	200~240VAC
Operating frequency	50-60Hz
Circuit Wattage	23w including Driver Losses
Circuit Current	0.102
Driver Current Rating	600mA
PFC	0.94
In Rush Current	1.498A Max peak @ 0-40ms
Start Time	< 0.5 Sec
Ambient temperature range	-20°C to +40°C
IP rating	65

Construction

Body:	Polycarbonate
Diffuser:	Polycarbonate
Lens:	Polycarbonate


Standards

BSEN60598-1:2021	Luminaires – Part 1: General requirements and tests
BSEN60598-2-22:2014+A1:2020	Luminaires – Part 2: Luminaires for Emergency Lighting

In Conformity with

LVD	Low voltage directive 2014/35/EU
EMC	Electromagnetic compatibility directive 2014/30/EU
ERP	Energy related products directive 2019/2020/EU
RoHS	Restriction of hazardous substances 2015/863/EU

Product Dimensions

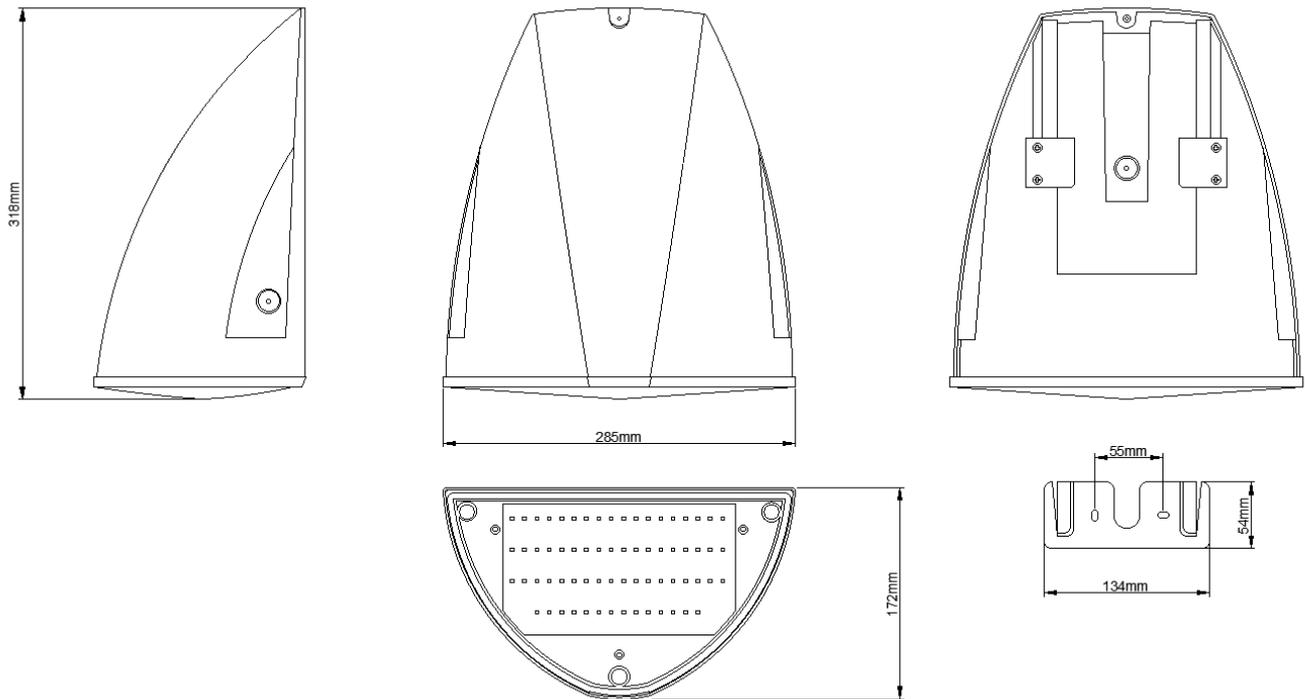

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.