

Coro LED Range

Exterior Wall Lighting



Data Sheet

Product Information

Coro LED up and down wall lights are available in 3000k LED. They are suitable for highlighting wall features.

To clean this product there is available to order a Stainless steel cleaning kit sold separately KSR3183.

Product Features

- 2 year warranty
- IP44
- Class I
- CRI: Ra80
- 2x3w 3000K LED head
- Marine Grade 316L Stainless Steel Body
- L70-30,000hrs



Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR1286	Coro LED Round Up and Down Wall Light	2x3w	3000	262	80	G	I
KSR1287	Coro LED Square Up and Down Wall Light	2x3w	3000	262	80	G	I

Nominal voltage	220~240VAC
Operating frequency	50/60Hz
Circuit Wattage	2x3w
Circuit Current	TBC
Driver mA Rating	TBC
PFC	0.9
In Rush Current	TBC
Ambient temperature range	-10°C to +40°C
IP rating	44

Construction

Body: 316L Stainless Steel
Diffuser: Polycarbonate

Standards


BSEN60598-1:2021 Luminaires – Part 1: General requirements and tests

In Conformity with


LVD Low voltage directive 2014/35/EU
EMC Electromagnetic compatibility directive 2014/30/EU
ERP Energy related products directive 2019/2020/EU
RoHS Restriction of hazardous substances 2015/863/EU

Product Dimensions

KSR1286

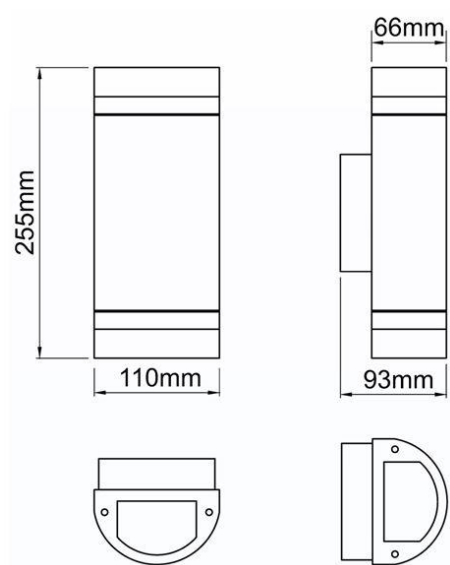

KSR1287

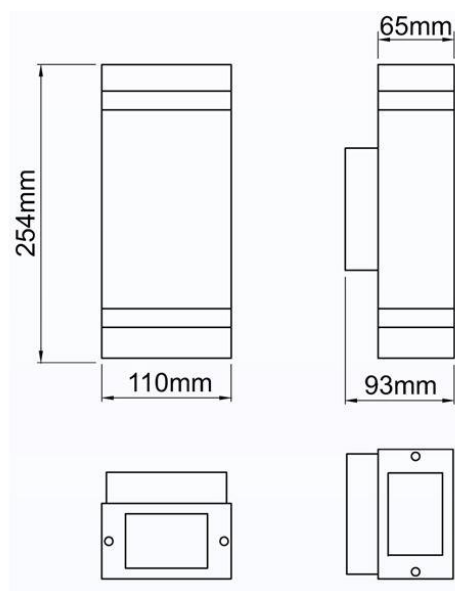

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.