

Navara LED NM Emergency IP20 Self-Test Twin Spot

Commercial Lighting



Data Sheet

Product Information

The Navara **Non-Maintained Emergency IP20 LED Twin Spots** are ideal for **Self-Test Emergency** Applications. Suitable for use in numerous commercial Internal environments such as warehouses, Halls and other large open spaces etc.

KSR98103 – In Emergency Mode



Product Features

- 5-year warranty
- Class II
- IP20
- 3W LED (2 x 1.5W)
- 6000K
- Self-Test Non-Maintained Operation
- Supplied with Long life LifePO4 cells
- L70 - 40,000hrs
- Lighting designers can download photometric data from our website

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR98103	Navara LED Self-Test Non-Maintained Emergency Twin Spot	2 x 1.5W	6000K	2 x 190lm	N/A	A	II


Emergency Parameters

Nominal voltage	200~240VAC
Operating frequency	50/60Hz
Circuit Wattage	2 x 1.5w including losses
Circuit Current	0.03A
Driver Current Rating	50mA
PFC	0.14
In Rush Current	N/A
Ambient temperature range	0°c to +35°c
IP rating	IP20
Circuit Wattage	0.4W
Circuit Current	0.14mA
Driver Current Rating	50mA
PFC	0.14
Battery Type	3.2V 4.5Ah LiFePO4

Construction

Body:	Polycarbonate
Diffuser:	Polycarbonate

Product Dimensions

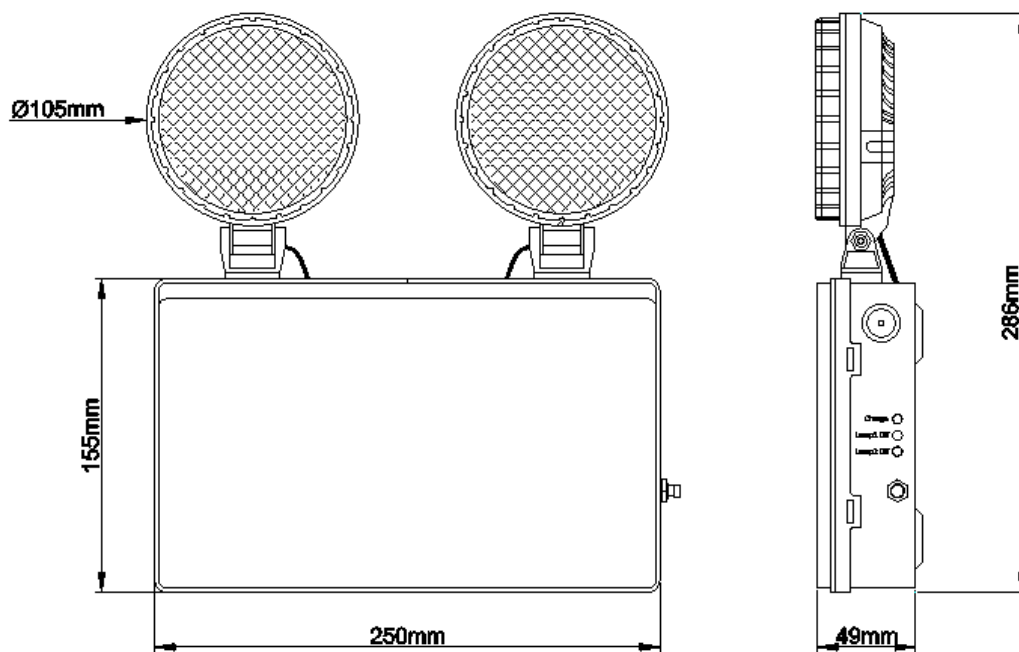

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.