

## **Product Information**

The Escala Pro LED Dimmable range of track fittings are ideal for domestic or commercial applications where you want a highly efficient light source.

With the adjustable beam angle feature the fitting lends itself well to applications where flexibility is needed without having to replace the fitting or add an attachment

They come complete with 3 year warranty

#### **Product Features**

- 3 year warranty
- Class I
- IP20
- High efficiency
- 3000K or 4000K LED
- CRI: >Ra90
- Adjustable beam
- Instant on
- Suitable for Escala Pro Surface Plate (KSR6511)
- Mains Dimmable Integrated drivers
- Lighting designers can download photometric data from our website
- L70 30,000hrs

# **Product Specification**

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (Im)		CRI (Ra)	Energy Efficiency Class 2021	Protection Class	Beam Angle
KSR6560	Escala Pro 20W	20	3000	FL	960	91	G	1	15-30°
	3000K LED			NFL	1011				
	Adjustable Beam Track Fitting			SP	746				
KSR6561	Escala Pro 20W	20	4000	FL	1064	91	G	1	15-30°
	4000K LED			NFL	1100				
	Adjustable Beam Track Fitting			SP	805				
KSR6562	Escala Pro 30W	30	3000	FL	2109	92	G	T	15-36°
	3000K LED			NFL	1998				
	Adjustable Beam Track Fitting			SP	1486				
KSR6563	Escala Pro 30W	30	4000	FL	2220	94	G	1	15-36°
	4000K LED			NFL	2090				
	Adjustable Beam Track Fitting			SP	1574				
Optional A	Accessory								
KSR6414	Escala 3 Circuit track	Escala 3 Circuit track adapter for Escala Pro Single Circuit fittings							

Nominal voltage	220~240V
Operating frequency	50-60Hz
Ambient temperature range	-20°c~+40°c
Start time	< 0.5 sec
IP rating	20

## **Construction**

Body: Powder Coated Mild Steel

Rim: Aluminium

## **Standards**


BSEN60598-1:2021 Luminaires – Part 1: General requirements and tests

## In Conformity with


LVD Low voltage directive 2014/35/EU

EMC Electromagnetic compatibility directive 2014/30/EU ERP Energy related products directive 2019/2020/EC RoHS Restriction of hazardous substances 2015/863/EU

## **Product Dimensions**



#### KSR6560-61

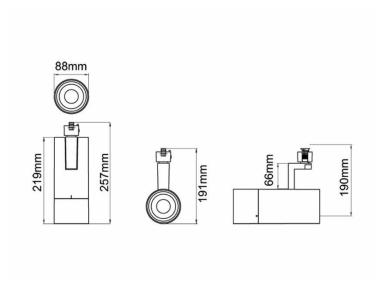

KSR6562-63

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.