

# Sorocco LED IP44 Downlight

Commercial Lighting



#### **Product Information**

The Sorocco LED IP44 downlight fitting is perfect for commercial applications where low glare and a higher IP rating is required. This fitting has a high output rated @ 40w.

Comes with a 5 year warranty for peace of mind.



#### **Product Features**

- 5 year warranty
- IP44 from the front
- Instant on
- High CRI up to Ra92
- Tridonic branded driver
- Complete with low flicker driver
- Dimmable options Available on Request – DALI or Switch Dim
- Emergency option Available
- High efficiency up to 103lumens per Circuit watt
- L70 40,000hrs

Product Code	Product Description	Wattage (W)	CCT (K)	Beam Angle	Lumens (lm)	CRI (Ra)	Energy Efficiency Class 2021	Protection Class
KSRDL381	Sorocco 40w 4000K LED IP44 Round Commercial Downlight	40	4000	62°	3955	91	E	II

## **Product Specification**

<sup>\*</sup>For emergency options please add EM to the end of the part code

Technical Data	33w LED Downlight	40w LED Downlight
Nominal voltage	220~240VAC	220~240VAC
Operating frequency	50-60Hz	50-60Hz
Circuit Wattage	30.6w including Driver	40.2w including Driver
Circuit Current	0.134A	0.181A
Driver Current Rating	800mA	1050mA
PFC	0.95	0.96
In Rush Current	0.81A Max Peak	1.09A Max Peak
Start Time	< 0.5 Sec	< 0.5 Sec

<sup>\*</sup>Available to order with SwitchDim, CorridorFUNCTION, DALI and DSI Control gear

Ambient temperature range	-20°c to +30°c	-20°c to +30°c
IP rating	44	44

#### Construction

Body: Cast Aluminium Rim: Aluminium

#### **Standards**

BSEN60598-1:2021 Luminaires – Part 1: General Requirements and tests BSEN60598-2-22:2014 + A1 2020 Luminaires – Part 2: Luminaires emergency lighting


### In Conformity with

LVD Low voltage directive 2014/35/EU

EMC Electromagnetic compatibility directive 2014/30/EU ERP Energy related products directive 2019/2020/EU RoHS Restriction of hazardous substances 2015/863/EU

#### **Product Dimensions**

KSRDL381

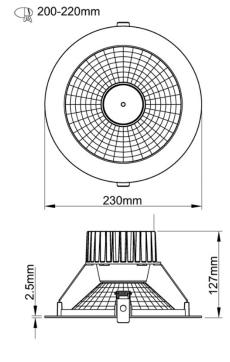

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.