

Navara LED Emergency IP20 Exit Box



Emergency Lighting

Product Information

The Navara LED Exit Boxes come complete with UP arrow legend, various other legends available, ideal for numerous Emergency applications where an Emergency escape route is required.

They come complete with a 5 year warranty for your peace of mind.

Product Features

- 5-year warranty (3 on the batteries)
- Class I
- **IP20**
- **5W LED**
- 6000K
- **Maintained Emergency**
- Complete with UP Arrow Legend
- Supplied with Long life LifePO4 cells
- L70 40,000hrs
- Lighting designers can download photometric data from our website

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR98126	Navara LED Emergency IP20 Exit Box c/w UP Arrow	5W	6000	45 (Mains) 29 (battery)	N/A	A	I

Other Legends Available :-

KSR98110 - Arrow Left Legend

KSR98111 - Arrow Right Legend

KSR98112 - Arrow Down Legend

Nominal voltage	200~240VAC			
Operating frequency	50/60Hz			
Circuit Wattage	4.4w including losses			
Circuit Current	0.03A			
Driver Current Rating	50mA			
PFC	0.14			
In Rush Current	N/A			
Ambient temperature range	0°c to +35°c			
IP rating	20			

Emergency Parameters

Circuit Wattage	0.4w			
Circuit Current	0.14mA			
Driver Current Rating	50mA			
PFC	0.14			
Battery Type	3.2v 1.5Ah LiFePO4			


Construction


Body: Powder coated Mild Steel

Diffuser: Polycarbonate


Product Dimensions

KSR98126

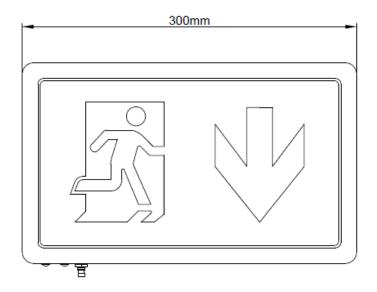



Backplate Fixing Details

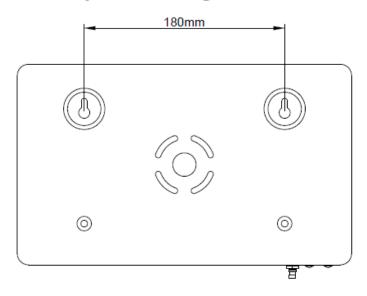

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.