Installation Sheet)

KSR6520



Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP20 ⊕ **¼ (€** 👍 240V 10W LED Max.

Important Information

It is recommended that the track system is installed and fitted by a qualified electrician ensuring the installation complies to current wiring regulations & local building control. These products are designed for use with the Escala Pro single circuit track system only. Any damaged parts should be replaced as soon as possible.

KSR will not accept responsibility for any claims arising from a sub-standard installation.

Important User Advice

Always switch off mains supply before installing or servicing.

This product is designed to be used indoors only.

Installation Procedure

Familiarize yourself with the way the luminaire attaches to the track and ensuring the correct

KSR recommend to insert the luminaire into track then look at the arrows imprinted on the locking tab rotate the track adaptor in the direction required so the arrows on the locking tab point towards the live side of the track (denoted by the line running down the side of the track) ensuring the locking tab locks into the track, never force the luminaire in the wrong direction as this can damage the track and luminaire see Fig.1 and Fig.2.


Make sure the locking tab is located in the locked position.

Fit lamp in fitting.

Adjust beam aim by turning and tilting head of luminaire.

Turn on the mains supply and ensure the luminaire is working correctly.

Avoid touching a hot luminaire.

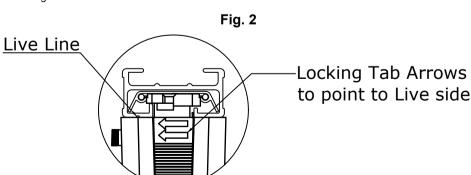

KSR Lighting Aftersales: 023 92 674343 E-mail: aftersales@ksrlighting.com





Available Finishes: White or Black

Fig. 1

