



Read these instructions before commencing installation & retain them for future reference.

IP44  **CE** **240V 8W LED**

This fitting is Class II and does not require an Earth

Important Information

It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V 50Hz supply. Any broken or damaged parts should be replaced as soon as possible.

KSR will not accept responsibility for any claims arising from a poor installation.

Important User Advice

Always switch off mains supply before servicing.

Installation Procedure

Ensure mains supply is turned off.

Remove the Opal diffuser by unscrewing anti-clockwise. Take care to ensure the gasket remains in place on the diffuser.

Hold the base section and rotate the LED module clockwise to remove it from the mounting base.

Dress the mains supply cable through the central hole, then secure the base section to a suitable surface.




Connect the L & N to the mains cable, it may be easier to strip back some of the white insulator on the LED module.

Feed the cables up into the void within the base section at the same time relocate the LED module and turn Anti-Clockwise to lock it back into position.

Install the globe and tighten to create a good seal.

Turn on the power and test the luminaire.


Note: This fitting is not designed to accommodate a 3 plate lighting connection.

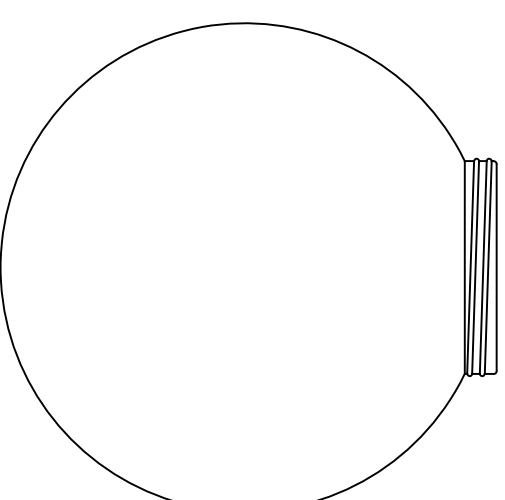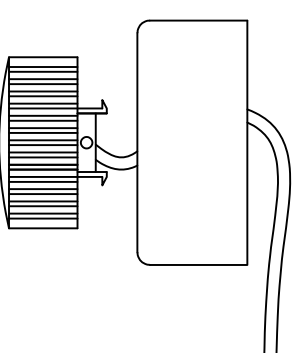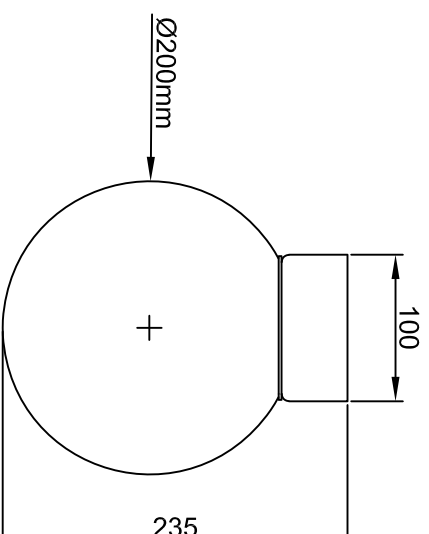

Lamp Details



Lamp: 8W LED 4000K
Lumen Output: 535 lumens



Product Information

KSR Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com